



Features

- Exterior LED Floodlight, comes complete with 1000mm flying lead and adjustable bracket, aluminium housing, clear glass diffuser, integrated anti-condensation valve, IP66, IK08, Class I, 4000K, CRI80, DALI dimmable, 23000lm, 150W, 153lm/W, Asymmetrical Wide beam, 100.000hrs L80B50 lifespan, 451 x 345 x 75mm (LxWxD) dimensions, 5.7kg weight, RAL9017 Traffic Black color.


Product Overview

| | |
|-----------------------------------|---------------------------------|
| Product name | Kalani IP66 21KLM 840 ASYM DALI |
| Technology | LED |
| Cap/Base | N/A |
| Housing | Aluminium |
| Mount | Other |
| General application | Logistics & Industry |
| ETIM Class | EC001744 |
| Fixture luminous flux (lm) | 23000 |
| Luminaire efficacy (lm/W) | 153 |
| Correlated colour temperature (k) | 4000 |
| Light colour | Neutral White |
| CRI (Ra) | 80 |
| Colour Variation Initial (SDCM) | 3 |
| Beam Angle (°) | 65x120 |
| Photobiological Risk Group | RG1 |
| Total power consumption (W) | 150 |
| Electrical protection | Class I |
| Control gear type | LED driver constant current |
| Dimmable | Yes |
| LED Flickering Rate | Low (6% - 20%) |

Kalani IP66 21KLM 840 ASYM DALI 0056823

| | |
|-----------------------------|--------------------------|
| Housing colour | RAL 9017 - Traffic black |
| IP rating | IP66 |
| IK rating | IK08 |
| Product EAN number | 5410288568232 |
| Warranty | 5 years |
| Dimming method | DALI-2 |
| Useful luminous flux (#use) | 23000 |

Photometry

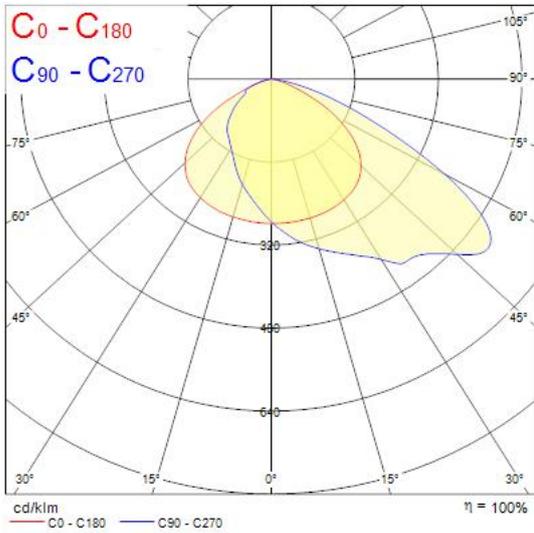

Technical drawings

