



Features

• SYLMASTER T8 LED 1200 2L 4350LM 840 is a surface mounted / pendant luminaire supplied with 2x T8 LED tubes (0030246 TOLEDO SUPERIA T8 CCG L1200 3100LM 840 75K PET SL). CRI (Ra) >80, Colour temperature 4000K, System power 34W, Luminous flux 4350lm, efficacy 128lm/W. IK02, IP20, Class I. Luminaires supplied without ballast as the tube is designed to work with direct mains operation (AC 220-240V), 75,000 hours average rated life (L70B50).


Product Overview

Product name	SYLMASTER T8 LED 1200 2L 4350LM 840
Technology	LED
Cap/Base	G13
Housing	Steel
Mount	Ceiling surface mounting
Light source included	0030246
Fixture luminous flux (lm)	4350
Luminaire efficacy (lm/W)	128
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	6
Glare control	< 23
Photobiological Risk Group	RG0
Total power consumption (W)	34.0
Electrical protection	Class I
Control gear type	Not required
Housing colour	White
IP rating	IP20

SYLMASTER T8 LED 1200 2L 4350LM 840 0051690

IK rating	IK02
Product EAN number	5410288516905
Warranty	5 years

Photometry

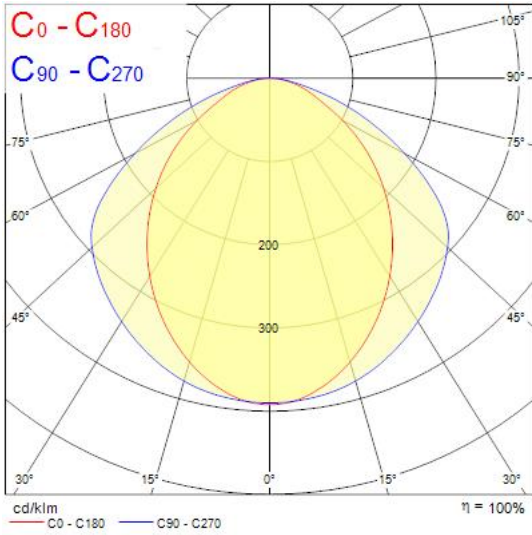

Technical drawings

