



Features

- SYLMASTER T8 LED 1500 2L 5750LM 840 is a surface mounted / pendant luminaire supplied with 2x T8 LED tubes (0030249 TOLEDO SUPERIA T8 CCG L1500 4100LM 840 75K PET SL). CRI (Ra) >80, Colour temperature 4000K, System power 44W, Luminous flux 5750lm, efficacy 131lm/W. IK02, IP20, Class I. Luminaires supplied without balassta as the tube is designed to work with direct mains operation (AC 220-240V), 75,000 hours average rated life (L70B50).

Product Overview

Product name	SYLMASTER T8 LED 1500 2L 5750LM 840
Technology	LED
Cap/Base	G13
Housing	Steel
Mount	Ceiling surface mounting
Light source included	0030249
Fixture luminous flux (lm)	5750
Luminaire efficacy (lm/W)	131
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	6
Glare control	< 23
Photobiological Risk Group	RG0
Total power consumption (W)	43.0
Electrical protection	Class I
Control gear type	Not required
Housing colour	White
IP rating	IP20

Light your world

IK rating

IK02


Product EAN number

5410288516912


Warranty

5 years

Photometry

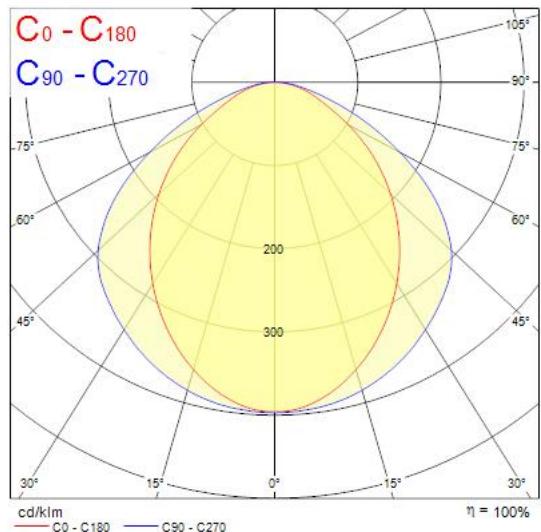

Technical drawings

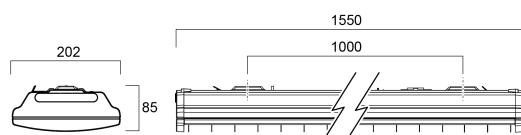

Light your world