


INSAVER SLIM SQUARE 200

Insaver Slim UGR19 IP44 200 2500lm 840 Square
0030513



Product features

- Insaver Slim is a ceiling recessed LED downlight (IP44 from the front), Die-cast aluminium body, loop in loop out connector for quick installation, Non dimmable LED driver, 20W; 2500lm; 125lm/W; 4000K; UGR <19 with shallow product depth 65mm. Meets TP(a) requirements.

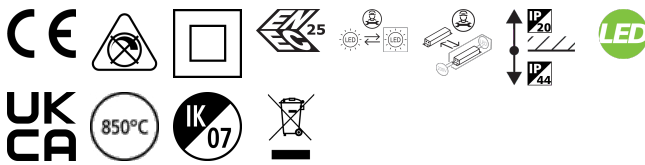

PRODUCT OVERVIEW


Product name	Insaver Slim UGR19 IP44 200 2500lm 840 Square
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Ceiling recessed mounting
General application	Hospitality, Office, Retail
ETIM Class	EC001744
E-number FI	4278543
Warranty	5 years
Fixture luminous flux (lm)	2500
Luminaire efficacy (lm/W)	125
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Beam Angle (°)	70
Glare control	< 19
Photobiological Risk Group	RG1
Total power consumption (W)	20
Electrical protection	Class II
Control gear type	LED driver constant current
Dimmable	No
Dimming method	N/A
LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL 9010 - Pure white
IP rating	IP44/20
IK rating	IK07
Product EAN number	5410288305134

PHOTOMETRY

INSAVER SLIM SQUARE 200

Insaver Slim UGR19 IP44 200 2500lm 840 Square

0030513



Height (m)	Beam Diameter (mm)	Beam Angle (°)	Beam Diameter (mm)	Beam Angle (°)
0.5	844	84.0	844	84.0
1.0	1137	63.0	1137	63.0
1.5	1504	48.0	1504	48.0
2.0	1968	36.0	1968	36.0
2.5	2544	27.0	2544	27.0
3.0	3240	20.0	3240	20.0
3.5	4080	15.0	4080	15.0

TECHNICAL DRAWINGS

