


Walraven starQuick® Clamp (White)

(C0510)

for securing conduits and pipes to walls, floors, or ceilings

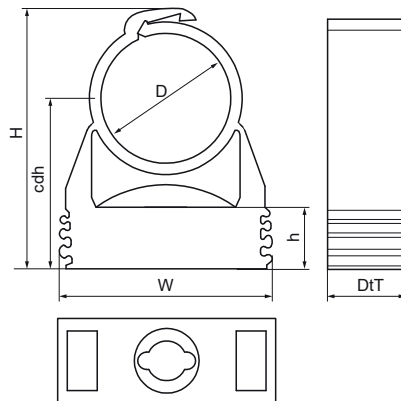

Features & benefits

- one-part clamp
- clamp closes by applying pressure to the pipe
- for outdoor use and installations in swimming pool environments, chemical factories, zinc factories, etc.
- due to a patented profile it is possible to tack several clamps to each other
- material: modified PA6 (polyamide), white (according to RAL 9003)
- resistant to UV, ageing, oil and petrol
- no corrosion, recyclable, halogen free
- temperature resistance from approx. -40 °C to approx. +90 °C (constant); short to approx. +130 °C



Product Number	VVS Number	Outside Pipe Diameter	Fixing Hole	Total Height	Total Width	Total Depth	Clamp Center Distance Height	Height	Connection Thread	Maximum Allowed Load Faz	Breaking Load Fbz
Reference Letter		D	FH	H	W	DtT	cdh	h	G	Fa,z	Fb,z
Unit description		mm	mm	mm	mm	mm	mm	mm		N	N
0855010	18035012	10 - 12	8	34	29	17	24	12.1	None	500	500
0855012	18035014	12 - 14	8	36	29	17	25	10.6	None	180	550
0855015	18035016	14 - 16	8	36	29	17	25	10.6	None	200	600
0855018	18035020	16 - 20	8	40	29	17	27	10.6	None	230	700
0855022	18035023	20 - 23	8	43	29	17	28	10.6	None	270	800
0855028	18035028	24 - 28	8	50	40	18	32	10.6	None	280	850
0855031	18035031	28 - 32	8	55	40	17	36	10.6	None	300	900
0855035	18035035	32 - 35	8	59	43	17	37	10.6	None	330	1,000
0855038	18035040	35 - 40	8	68	47	17	44	10.6	None	330	1,100
0855042	18035044	40 - 44	8	70	52	17	44	12.1	None	330	1,200
0855050	18035050	44 - 50	8	79	57	17	50	12.1	None	330	1,300
0855054	18035055	48 - 55	8	82	63	17	50	12.1	None	330	1,400
0855063	18035065	59 - 95	8	95	74	20	57	12.1	None	500	1,500