

Features

- Insaver Slim is a surface mounted LED downlight, Die-cast aluminium body, loop in loop out connector for quick installation, Non dimmable LED driver, 20W; 2350lm; 118lm/W; 3000K; UGR <19 with height of 95 mm. Meets TP(a) requirements.


Product Overview

| | |
|---------------------------------|---------------------------------------------------|
| Product name | Insaver Slim UGR19 220 2350lm 830 Surface Mounted |
| Technology | LED |
| Cap/Base | N/A |
| Housing | Aluminium |
| Mount | Ceiling surface mounting |
| E-number FI | 4278545 |
| Fixture luminous flux (lm) | 2350 |
| Luminaire efficacy (lm/W) | 118 |
| Colour temperature (K) | 3000 |
| Light colour | Warm White |
| CRI (Ra) | 80 |
| Colour Variation Initial (SDCM) | 3 |
| Glare control | < 19 |
| Photobiological Risk Group | RG1 |
| Total power consumption (W) | 20 |
| Electrical protection | Class II |
| Control gear type | LED driver constant current |
| LED Flickering Rate | Ultra low (5% or less) |
| Housing colour | RAL 9010 - Pure white |

Insaver Slim UGR19 220 2350lm 830 Surface Mounted 0030516

| | |
|--------------------|---------------|
| IP rating | IP20 |
| IK rating | IK07 |
| Product EAN number | 5410288305165 |
| Warranty | 5 years |

Photometry

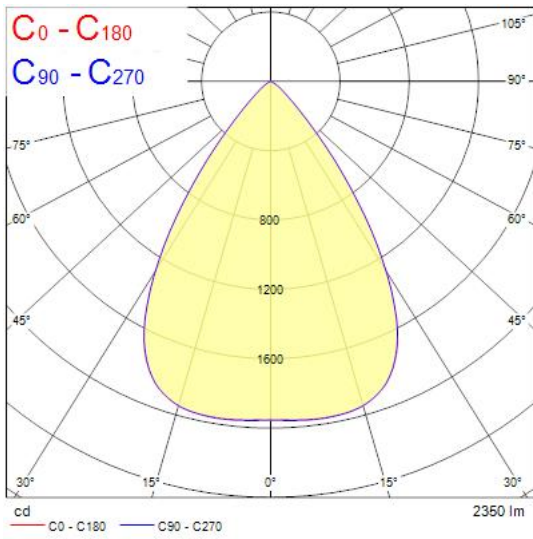

Technical drawings

