

INSAVER SLIM 220 SURFACE MOUNTED

Insaver Slim UGR19 220 2500lm 840 Surface Mounted

0030517



Product features

- Insaver Slim is a surface mounted LED downlight ,Die-cast aluminium body, loop in loop out connector for quick installation, Non dimmable LED driver, 20W; 2500lm; 125lm/W; 4000K; UGR <19 with height of 95 mm. Meets TP(a) requirements.



PRODUCT OVERVIEW

Product name	Insaver Slim UGR19 220 2500lm 840 Surface Mounted
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Ceiling surface mounting
General application	Hospitality, Office, Retail
ETIM Class	EC001744
E-number FI	4278546
Warranty	5 years
Fixture luminous flux (lm)	2500
Luminaire efficacy (lm/W)	125
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Beam Angle (°)	70
Glare control	< 19
Photobiological Risk Group	RG1
Total power consumption (W)	20
Electrical protection	Class II
Control gear type	LED driver constant current
Dimmable	No
Dimming method	N/A
LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL 9010 - Pure white
IP rating	IP20
IK rating	IK07
Product EAN number	5410288305172

DATA TABLE

General data

Product name	Insaver Slim UGR19 220 2500lm 840 Surface Mounted
--------------	---

INSAVER SLIM 220 SURFACE MOUNTED

Insaver Slim UGR19 220 2500lm 840 Surface Mounted

0030517

Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Ceiling surface mounting
General application	Hospitality, Office, Retail
Operating temperature range (°C)	-20°C...+40°C
ETIM Class	EC001744
E-number FI	4278546
Warranty	5 years

Optical data

Fixture luminous flux (lm)	2500
Luminaire efficacy (lm/W)	125
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Beam Angle (°)	70
Distribution type	Symmetric
Glare control	< 19
Photobiological Risk Group	RG1

Electrical data

Total power consumption (W)	20
Primary Supply/Product voltage - min (V)	220
Primary Supply/Product voltage - max (V)	240
Lamp power factor	0.9
THD (at 230 V, 50 Hz, full load, at 100% dimming level) xx.x %	20.0
Electrical protection	Class II
Control gear type	LED driver constant current
Dimmable	No
Dimming method	N/A
Drive current (mA)	600
Inrush Current (A)	20
Inrush Duration (µs)	101
Glow Wire Test (°C)	850
Energy Efficiency Class (A->G) of contained light source	D
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Ultra low (5% or less)
Max. products per 10A C Breaker	38
Max. products per 16A C Breaker	57
Max. products per 16A B Breaker	45
Connectable conductor cross section - Min (mm²)	0.75
Connectable conductor cross section - Max (mm²)	1.5

INSAVER SLIM 220 SURFACE MOUNTED

Insaver Slim UGR19 220 2500lm 840 Surface Mounted
0030517

Lifetime data

Lifespan L70 B50	100000
Lifespan L80 B20	88000
Lifespan L80 B10	80000
Lifespan L90 B10	39000

Physical data

Housing colour	RAL 9010 - Pure white
IP rating	IP20
IK rating	IK07
Diffuser finish	Other
Diffuser material	None
Reflector finish	Silver
Nominal Product Height (mm)	95
Nominal Product Diameter (mm)	220
Cutout Dimensions (W x L in mm or Diameter in mm)	N/A
Weight (kg)	1.65


Packaging

Single packaging type	Carton
Product EAN number	5410288305172
Packaging single length / height (cm)	22.6
Packaging single width (cm)	22.6
Packaging single depth (cm)	10.3
DUN14 (outer)	15410288305179
Units per outer package	8
Packaging outer length / height (cm)	45.5
Packaging outer width (cm)	23.5
Packaging outer depth (cm)	43.0

Safety data

Optimal operating condition (°C)	-20-40
----------------------------------	--------

PHOTOMETRY

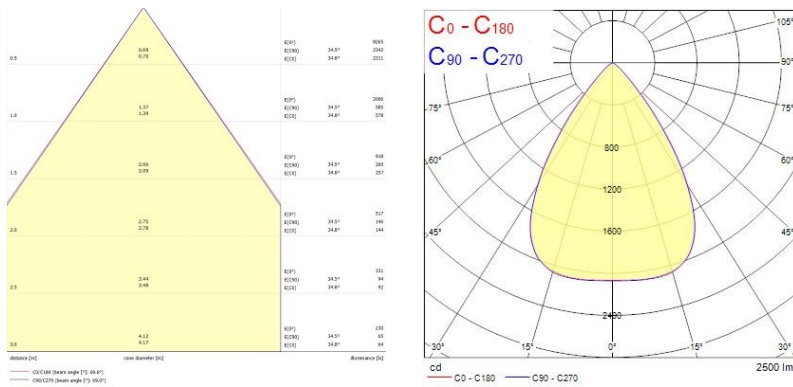

INSAVER SLIM 220 SURFACE MOUNTED

Insaver Slim UGR19 220 2500lm 840 Surface Mounted
0030517

TECHNICAL DRAWINGS

