

## INSAVER SLIM 220 SURFACE MOUNTED

*Insaver Slim UGR19 220 2500lm 840 Surface Mounted*  
0030517



### Product features

- Insaver Slim is a surface mounted LED downlight ,Die-cast aluminium body, loop in loop out connector for quick installation, Non dimmable LED driver, 20W; 2500lm; 125lm/W; 4000K; UGR <19 with height of 95 mm. Meets TP(a) requirements.




### PRODUCT OVERVIEW

|                                 |   |
|---------------------------------|---|
| Product name                    | Insaver Slim UGR19 220 2500lm 840 Surface Mounted |
| Technology                      | LED   |
| Cap/Base                        | N/A   |
| Housing                         | Aluminium   |
| Mount                           | Ceiling surface mounting                          |
| General application             | Hospitality, Office, Retail                       |
| ETIM Class                      | EC001744  |
| E-number FI                     | 4278546   |
| Warranty                        | 5 years   |
| Fixture luminous flux (lm)      | 2500  |
| Luminaire efficacy (lm/W)       | 125   |
| Colour temperature (K)          | 4000  |
| Light colour                    | Neutral White                                     |
| CRI (Ra)                        | 80  |
| Colour Variation Initial (SDCM) | SDCM3   |
| Beam Angle (°)                  | 70  |
| Glare control                   | < 19  |
| Photobiological Risk Group      | RG1   |
| Total power consumption (W)     | 20  |
| Electrical protection           | Class II  |
| Control gear type               | LED driver constant current                       |
| Dimmable                        | No  |
| Dimming method                  | N/A   |
| LED Flickering Rate             | Ultra low (5% or less)                            |
| Housing colour                  | RAL 9010 - Pure white                             |
| IP rating                       | IP20  |
| IK rating                       | IK07  |
| Product EAN number              | 5410288305172                                     |

### PHOTOMETRY

## INSAVER SLIM 220 SURFACE MOUNTED

*Insaver Slim UGR19 220 2500lm 840 Surface Mounted*  
0030517

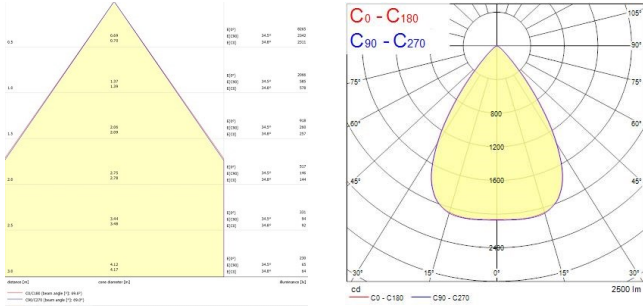

### TECHNICAL DRAWINGS

