


Walraven RapidRail® Light-Duty Channel

(G0406)

channels for light-duty applications

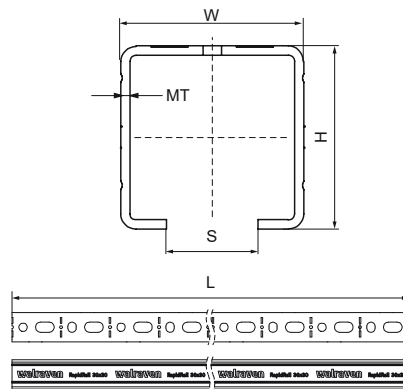

Features & benefits

- C-profile
- for quick and adjustable fixing of one or multiple pipes
- with continuous perforation
- distance between rail end and first hole is always equal
- with sawing marks each 50 mm
- flexible hole pattern with anchor holes and also small holes to use wood screws
- unique hole pattern at rail 30x20 allows to click in Walraven RapidRail® Hammerfix from both sides
- special hole pattern and material thickness for 32x20 rail
- material: steel 1.0242
- pre-galvanized
- for more information about the max. allowed load (Faz) please refer to the loading tables or our online datasheet 'Technical Details Walraven RapidRail®'



Product Number	VVS Number	Type	Total Height	Total Width	Total Length	Material Thickness	Profile Opening
Reference Letter			H	W	L	MT	S
Unit description			mm	mm	mm	mm	mm
650527182	18040502	27x18	18	27	2,000	1.00	15
650527183	18040503	27x18	18	27	3,000	1.00	15
650527184	18040504	27x18	18	27	4,000	1.00	15
650527186		27x18	18	27	6,000	1.00	15
650530150	18040510	30x15	15	30	500	1.50	15
650530152	18040512	30x15	15	30	2,000	1.50	15
650530153	18040513	30x15	15	30	3,000	1.50	15
650530156	18040516	30x15	15	30	6,000	1.50	15
650530202	18040522	30x20	20	30	2,000	1.25	15
650530203	18040523	30x20	20	30	3,000	1.25	15
650530206	18040526	30x20	20	30	6,000	1.25	15
650530302	18040532	30x30	30	30	2,000	1.50	15
650530303	18040533	30x30	30	30	3,000	1.50	15
650530306	18040536	30x30	30	30	6,000	1.50	15