

27 802 660 Product version up to 6/3/2020



- COMPACT RAIN, max. flow rate 15 l/min (at 3 bar)
- with anti-scale system
- 3/8" shower outlet
- metal shower hose 1250mm with integrated anti-twist protection

**Technical data:**

- rosette Ø 60 mm
- 1/2" connection

**Notes:**

Intrinsic protection against back flow.

Recommended miscellaneous


**Concealed wall elbow -**

35 085 970 90




- min. recess depth 90 mm
- max. recess depth 163 mm

27 802 660 Product version up to 6/3/2020  
mm [inches]

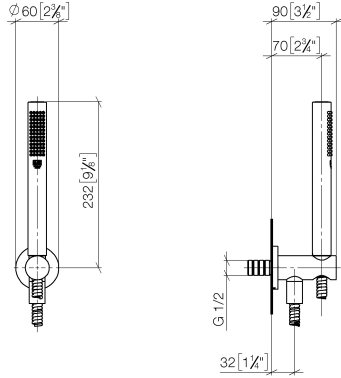

Flow rate chart

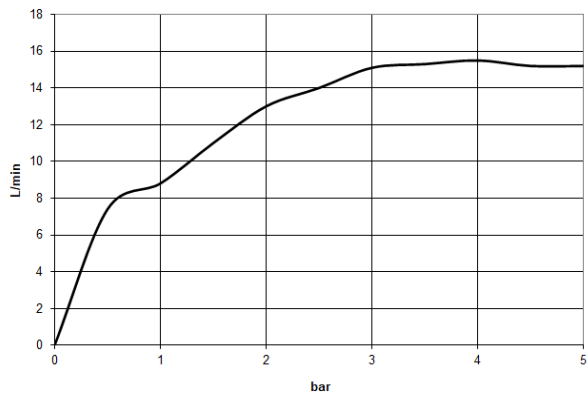

Codes & Standards

DIN 4109

EN 1717

ISO 3822

Scottish Water  
Byelaws

UK Water Supply  
Regulations

Ü-Zeichen



Hand shower set with integrated shower holder - Brushed Durabrass (23kt Gold)

SERIES SPECIFIC

---

27 802 660 Product version up to 6/3/2020


Certificates and sustainability

---

Belgaqua\_24-007-2 LGA\_29

LGA\_29

WRAS\_250402

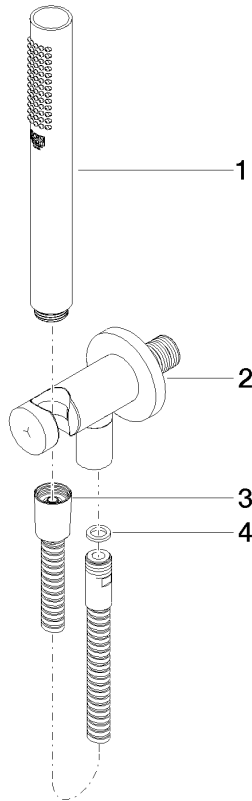

Spare parts list

No.	Item Number	Name	Quantity used	Delivery time
4	90 14 20 026 00 90	Washer 14 x 8 x 2 mm Centellen WS 3820 -	1.00	14
2	28 490 660-28	Wall elbow with integrated shower holder - Brushed Durabron (23kt Gold)	1.00	40
3	90 30 02 072 00-28	Metal shower hose 1/2" x 3/8" x 1250 mm - Brushed Durabron (23kt Gold)	1.00	40
1	28 029 979-28	SERIES-VARIOUS Hand shower - Brushed Durabron (23kt Gold)	1.00	40