


## Walraven RapidStrut® channel (BUP1000)

(H0413)

for medium weight fixing applications

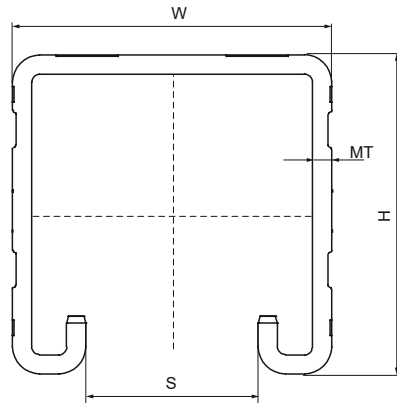

### Features & benefits

- universal channel system
- corrosion protection remains intact after cutting
- distance between channel end and first hole is always equal
- inward formed flanges with serrated profile for extra grip
- with continuous smart hole pattern including round anchor holes
- with sawing marks each 50 mm on all 3 sides of the profile
- material: steel 1.0242 (S250GD)
- product is part of the Walraven UltraProtect® 1000 system
- suitable for in- and outdoor applications
- stands min. 1,000 hours salt spray test (max. 5% red rust) according to ISO 9227
- Walraven RapidStrut® 41|H and 62|H tested for fire safety according to EN 1363-1
- for more information about the max. allowed load (Faz) please refer to the loading tables or our online datasheet 'Walraven RapidStrut® Data Sheet'
- Channel stamped in accordance with BS6946:1988



Product Number	NOBB Number	NRF Number	Type	Total Height	Total Width	Total Length	Material Thickness	Profile Opening
<i>Reference Letter</i>				<i>H</i>	<i>W</i>	<i>L</i>	<i>MT</i>	<i>S</i>
<i>Unit description</i>				<i>mm</i>	<i>mm</i>	<i>mm</i>	<i>mm</i>	<i>mm</i>
65018327		3484861	21   H	21	41	3,000	2.50	22
65018347		3484863	41   H	41	41	3,000	2.50	22
65018627		3484862	21   H	21	41	6,000	2.50	22
65018647		3484864	41   H	41	41	6,000	2.50	22
65018227		3485255	21   H	21	41	2,000	2.50	22
65018242		1389648	41   M	41	41	2,000	2.00	22
65018247		3485102	41   H	41	41	2,000	2.50	22
65018342		1389649	41   M	41	41	3,000	2.00	22
65018642		1389650	41   M	41	41	6,000	2.00	22
65018667		3485103	62   H	62	41	6,000	2.50	22
65018687		3485104	82   H	82	41	6,000	2.50	22
65018367		1389651	62   H	62	41	3,000	2.50	22
65018387		1389652	82   H	82	41	3,000	2.50	22
65018244			41   L	41	41	2,000	1.50	22
65018344		1389646	41   L	41	41	3,000	1.50	22
65018444			41   L	41	41	4,000	1.50	22
65018622			21   M	21	41	6,000	2.00	22
65018644		1389647	41   L	41	41	6,000	1.50	22
6501847050	60821522	1484503	41   H	41	41	500	2.50	22
6501847075	60821523	1484504	41   H	41	41	750	2.50	22
6501847100	60821524	1484505	41   H	41	41	1,000	2.50	22
6501847120	60821525	1484506	41   H	41	41	1,200	2.50	22
6501847180	60821526	1484507	41   H	41	41	1,800	2.50	22
6501847240	60821527	1484508	41   H	41	41	2,400	2.50	22