

RANA Linear Recessed - Louvre+Prismatic Optic
RANA LINEAR R 3KLM NW LOUV+PRI
0052352




PRODUCT OVERVIEW

Product name	RANA LINEAR R 3KLM NW LOUV+PRI
Technology	LED
Cap/Base	N/A
Housing	Steel
Mount	Ceiling recessed mounting
Fixture rating	Enclosed
Environment	Internal
Warranty	5 years
Fixture luminous flux (lm)	3250
Luminaire efficacy (lm/W)	120.37
LOR (%)	100
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Colour Consistency (SDCM)	3
Glare control	< 19
Photobiological Risk Group	RG0
Total power consumption (W)	27
Electrical protection	Class I
Control gear type	Electronic ballast
LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL 9016 - Traffic white / Bezel
IP rating	IP20
IK rating	IK07
Product EAN number	5410288523521

PHOTOMETRY

RANA Linear Recessed - Louvre+Prismatic Optic
RANA LINEAR R 3KLM NW LOUV+PRI
0052352

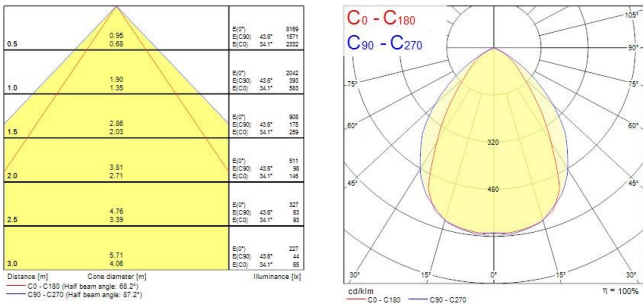

TECHNICAL DRAWINGS

