



### Features

- Ceiling recessed LED Linear luminaire with Louvre + Micro Prismatic Optic, Dimensions: 1154mm x 90mm x 91mm, Direct, White Body, Neutral White LED (4000K), 3250lm, 27W, 120lm/W efficacy, CRI>80, 3 SDCM (3-step MacAdam ellipse), Low LED Flicker (+/-5%), UGR<19, L90B10 at 50,000 hours, Electric Class1, Glow Wire Test 850°C, Can be covered with building insulation of Glass wool type


### Product Overview

<b>Product name</b>	RANA LINEAR R 3KLM NW LOUV+PRI
<b>Technology</b>	LED
<b>Cap/Base</b>	N/A
<b>Housing</b>	Steel
<b>Mount</b>	Ceiling recessed mounting
<b>Fixture rating</b>	Enclosed
<b>Environment</b>	Internal
<b>Fixture luminous flux (lm)</b>	3250
<b>Luminaire efficacy (lm/W)</b>	120.37
<b>LOR (%)</b>	100
<b>Colour temperature (K)</b>	4000
<b>Light colour</b>	Neutral White
<b>CRI (Ra)</b>	80
<b>Colour Consistency (SDCM)</b>	3
<b>Colour Variation Initial (SDCM)</b>	3
<b>Glare control</b>	< 19
<b>Photobiological Risk Group</b>	RG0
<b>Total power consumption (W)</b>	27
<b>Electrical protection</b>	Class I
<b>Control gear type</b>	Electronic ballast
<b>LED Flickering Rate</b>	Ultra low (5% or less)


Light your world

Housing colour	RAL 9016 - Traffic white / Bezel
IP rating	IP20
IK rating	IK07
Product EAN number	5410288523521
Warranty	5 years

### Photometry

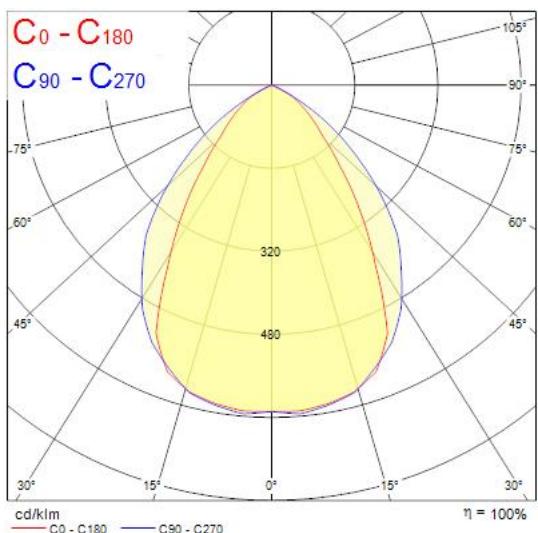

### Technical drawings

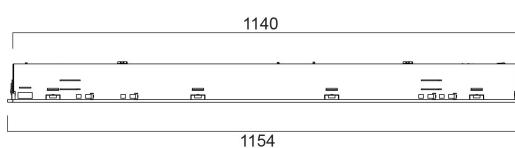

Light your world