

Domino Black Reflector DALI

DOMINO 5xLED 930 BLACK MB TRIM BLACK DALI
2061423



Product features

- Modular LED recessed linear spotlight, ideal for retail and hospitality applications. Die-cast aluminium body, passive cooling. Two levels of reflector installation, low glaring UGR<16. 5x LED source, 30° beam angle, optics: PMMA lens and polycarbonate reflector combination, Black matt reflector finish. Light color temperature: 3000K warm white, total system power: 13W, total fixture lumen output: 750lm, efficacy: 58 lm/W, Ra90 typical, LED chromacity: 3 step MacAdam ellipse (SDCM3), lifespan: 96,000 hours at 90% of the original output (L90B10), IR/UV free light source without heat radiation, operating voltage: 220-240V / 50-60Hz, electronic driver, ultra low flicker, DALI, electrical protection: Class II. Degree of Protection: IP40/IP20, suitable for indoor environment only.




PRODUCT OVERVIEW

Product name	DOMINO 5xLED 930 BLACK MB TRIM BLACK DALI
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Ceiling recessed mounting
Fixture rating	Enclosed
General application	Hospitality, Retail
ETIM Class	EC001744
Warranty	5 years
Fixture luminous flux (lm)	750
Luminaire efficacy (lm/W)	58
LOR (%)	100
Colour temperature (K)	3000
Colour Code	930
Light colour	Warm White
CRI (Ra)	90
Colour Variation Initial (SDCM)	SDCM3
Beam Angle (°)	30
Glare control	< 16
Photobiological Risk Group	RG1
Total power consumption (W)	13
Electrical protection	Class II
Control gear type	LED driver constant current
Control gear mounting	Remote
Dimmable	Yes
Dimming method	DALI
Minimum dimming level (%)	1
LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL 9005 - Jet black
IP rating	IP40/20
IK rating	IK03
Product EAN number	5025768614233

Domino Black Reflector DALI

DOMINO 5xLED 930 BLACK MB TRIM BLACK DALI
2061423

PHOTOMETRY

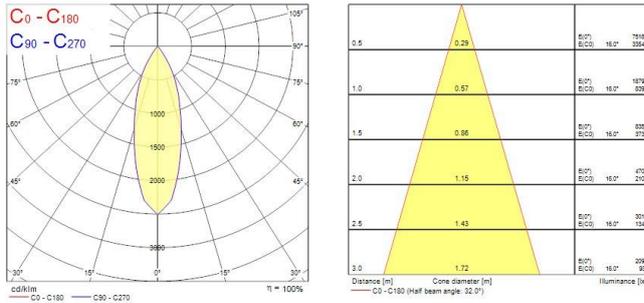

TECHNICAL DRAWINGS

