


## Walraven RapidStrut® channel (pg)

(H0410)

for medium weight fixing applications

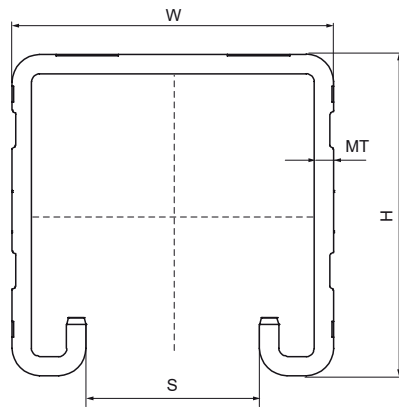

### Features & benefits

- universal channel system
- distance between channel end and first hole is always equal
- inward formed flanges with serrated profile for extra grip
- with continuous smart hole pattern including round anchor holes
- with sawing marks each 50 mm on all 3 sides of the profile
- pre-galvanized
- Walraven RapidStrut® 41|H and 62|H tested for fire safety according to EN 1363-1
- for more information about the max. allowed load (Faz) please refer to the loading tables or our online datasheet 'Walraven RapidStrut® Data Sheet'
- Channel stamped in accordance with BS6946:1988



Product Number	VVS Number	Type	Total Height	Total Width	Total Length	Material Thickness	Profile Opening
Reference Letter			H	W	L	MT	S
Unit description			mm	mm	mm	mm	mm
6505224	18050802	21   L	21	41	2,000	1.50	22
6505225	18050812	21   H	21	41	2,000	2.50	22
6505242	18050792	41   M	41	41	2,000	2.00	22
6505244	18050822	41   L	41	41	2,000	1.50	22
6505245	18050832	41   H	41	41	2,000	2.50	22
6505324	18050803	21   L	21	41	3,000	1.50	22
6505325	18040412	21   H	21	41	3,000	2.50	22
6505342	18050793	41   M	41	41	3,000	2.00	22
6505344	18040413	41   L	41	41	3,000	1.50	22
6505345	18040414	41   H	41	41	3,000	2.50	22
6505365	18040416	62   H	62	41	3,000	2.50	22
6505385	18050843	82   H	82	41	3,000	2.50	22
6505624	18050806	21   L	21	41	6,000	1.50	22
6505625	18040401	21   H	21	41	6,000	2.50	22
6505642	18050796	41   M	41	41	6,000	2.00	22
6505644	18040402	41   L	41	41	6,000	1.50	22
6505645	18040403	41   H	41	41	6,000	2.50	22
6505665	18040417	62   H	62	41	6,000	2.50	22
6505685	18050846	82   H	82	41	6,000	2.50	22
6505322	18050783	21   M	21	41	3,000	2.00	22
6505222	18050782	21   M	21	41	2,000	2.00	22
6505622	18050786	21   M	21	41	6,000	2.00	22