


Walraven RapidStrut® channel (pg)

(H0410)

for medium weight fixing applications

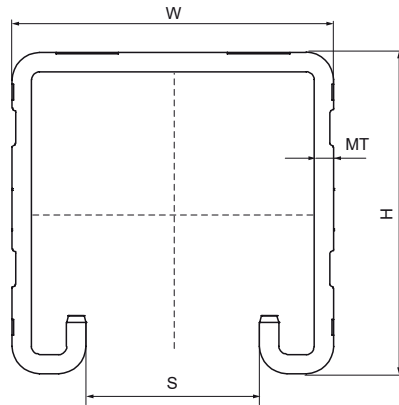

Features & benefits

- universal channel system
- distance between channel end and first hole is always equal
- inward formed flanges with serrated profile for extra grip
- with continuous smart hole pattern including round anchor holes
- with sawing marks each 50 mm on all 3 sides of the profile
- pre-galvanized
- Walraven RapidStrut® 41|H and 62|H tested for fire safety according to EN 1363-1
- for more information about the max. allowed load (Faz) please refer to the loading tables or our online datasheet 'Walraven RapidStrut® Data Sheet'
- Channel stamped in accordance with BS6946:1988



Product Number	NRF Number	Type	Total Height	Total Width	Total Length	Material Thickness	Profile Opening
Reference Letter			H	W	L	MT	S
Unit description			mm	mm	mm	mm	mm
6505224	3484104	21 L	21	41	2,000	1.50	22
6505225	3485998	21 H	21	41	2,000	2.50	22
6505242	3484105	41 M	41	41	2,000	2.00	22
6505244	3485397	41 L	41	41	2,000	1.50	22
6505245	3484106	41 H	41	41	2,000	2.50	22
6505324	3485398	21 L	21	41	3,000	1.50	22
6505325	3484109	21 H	21	41	3,000	2.50	22
6505342	3486288	41 M	41	41	3,000	2.00	22
6505344	3484111	41 L	41	41	3,000	1.50	22
6505345	3484112	41 H	41	41	3,000	2.50	22
6505365	3489315	62 H	62	41	3,000	2.50	22
6505385	3489316	82 H	82	41	3,000	2.50	22
6505624	3485399	21 L	21	41	6,000	1.50	22
6505625	3485192	21 H	21	41	6,000	2.50	22
6505642	3486291	41 M	41	41	6,000	2.00	22
6505644	3485401	41 L	41	41	6,000	1.50	22
6505645	3484281	41 H	41	41	6,000	2.50	22
6505665	3489321	62 H	62	41	6,000	2.50	22
6505685	3489322	82 H	82	41	6,000	2.50	22
6505322	3486287	21 M	21	41	3,000	2.00	22
6505222		21 M	21	41	2,000	2.00	22
6505622	3486289	21 M	21	41	6,000	2.00	22