

Product data sheet

Item No. 96.022.4453.0

Male connector with strain relief RST20i2S S13ZRW
V GL

Connector RST20i2, 2 pole, male, screw connection, 250V/20A, for illumination cable, color of coding: light gray, color of housing:light gray



Item No.	96.022.4453.0
EAN	4015573780873
Order Unit	100 Piece(s)

Certificates / Approvals

Technical data

General

Rated current	20 A
Rated voltage	250 V
Rated impulse voltage	4 kV
Pull relief	Yes
Pollution degree	3
Mechanical coding	Yes
Interlockable	Yes
Color of coding/ contact carrier	Light grey
Marking of poles	

Connection Data

Connection cross section solid	4 mm ²
Connection cross section stranded	4 mm ²
Terminations per pole	1

Model

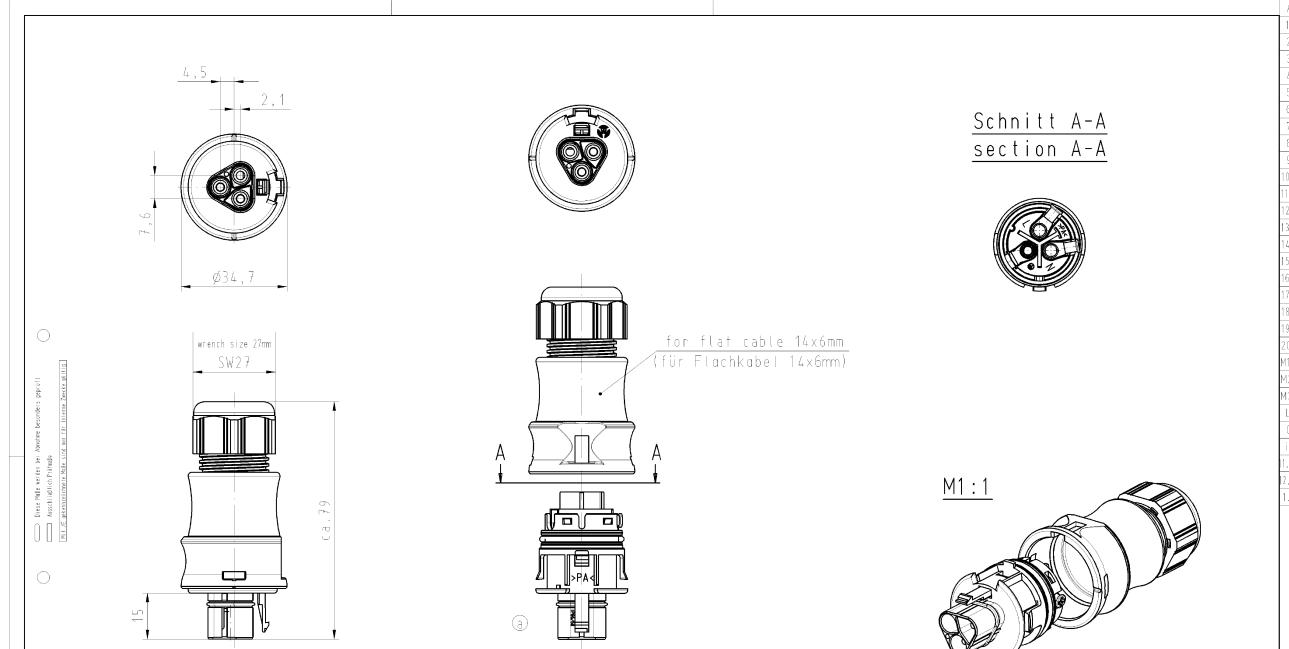
Model	male
Number of poles	2
Connection type	Screw connection
Degree of protection (IP)	IP66/IP68

Material

Housing material	Polyamide
Halogen free	Yes
Contact material	CuZn
Insulation components continuous temperature	100 °C
Surface finish	Silver-plated

Dimensions

Length	80.4 mm
Width	34.6 mm
Height	34.6 mm

Technical drawing


Verpackungseinheit: je 100 Stk.
packaging unit: per 100

Teile-Nr./ part-nr.	Farbe:/ color:	Einzl.-Teil-Nr.:* / single-part-nr.:*	Preisreferenz-Nr.		Maßstab	Werkstoff und Oberfläche: material and surface: Farbe: siehe Tabelle color: look table	Zeichnung, keine mindesten Anforderungen Drawing, no minimum requirements	1. Verwendung: 1. Zeichnung-Nr. Index
			1:1	1:1				
96.022.4453.1	schwarz, ähnl. RAL 9005/ black, similar to RAL 90051	/	/	1:1	Entwurf 07.05.2004 Design 07.05.2004		T 96.022.4453.0 01K a
96.022.4453.0	lichtgrau, ähnl. RAL 7035/ lightgrey, similar to RAL 70350	/	/	1:1	Entwurf 07.05.2004 Design 07.05.2004		Ersatz (Teil) +