


## Walraven RapidRail® Light-Duty Channel Type WM

(G0405)

channels for light-duty applications

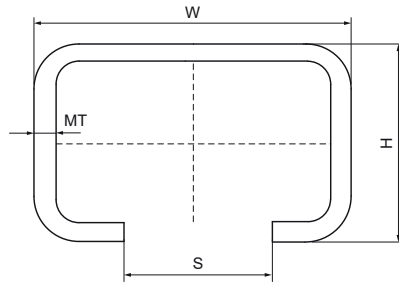

### Features & benefits

- C-profile
- for a quick and easy fixing
- with continuous perforation
- distance between rail end and first hole is always equal
- a continuous graduated centimetre scale on one side
- material: steel 1.0242
- pre-galvanized
- for detailed technical information about our RAL marked products, please see the RAL datasheet in our web catalogue
- for more information about the max. allowed load (Faz) please refer to the loading tables or our online datasheet "Technical Details Walraven RapidRail®"



| Product Number   | Type  | Total Height | Total Width | Total Length | Material Thickness | Profile Opening |
|------------------|-------|--------------|-------------|--------------|--------------------|-----------------|
| Reference Letter |       | H            | W           | L            | MT                 | S               |
| Unit description |       | mm           | mm          | mm           | mm                 | mm              |
| 6505002          | 30x30 | 30           | 30          | 2,000        | 2.00               | 15              |
| 6505030          | 30x45 | 45           | 30          | 2,000        | 2.00               | 15              |
| 6505235          | 38x40 | 40           | 38          | 2,000        | 2.00               | 15              |
| 6505302          | 30x30 | 30           | 30          | 3,000        | 2.00               | 15              |
| 6505335          | 38x40 | 40           | 38          | 3,000        | 2.00               | 15              |
| 6505602          | 30x30 | 30           | 30          | 6,000        | 2.00               | 15              |
| 6505630          | 30x45 | 45           | 30          | 6,000        | 2.00               | 15              |
| 6505635          | 38x40 | 40           | 38          | 6,000        | 2.00               | 15              |
| 6505435          | 38x40 | 40           | 38          | 4,000        | 2.00               | 15              |