

RANA LINEAR R 3KLM WW LOUV+PRI 1-10
0052357



Features

- Ceiling recessed LED Linear luminaire with Louvre + Micro Prismatic Optic, Dimensions: 1154mm x 90mm x 91mm, Direct, White Body, 1-10V Dimmable, Warm White LED (3000K), 3200lm, 27W, 119lm/W efficacy, CRI>80, 3 SDCM (3-step MacAdam ellipse), Low LED Flicker (+/-5%), UGR<19, L90B10 at 50,000 hours, Electric Class1, Glow Wire Test 850°C, Can be covered with building insulation of Glass wool type


Product Overview

| | |
|-----------------------------|-------------------------------------|
| Product name | RANA LINEAR R 3KLM WW LOUV+PRI 1-10 |
| Technology | LED |
| Cap/Base | N/A |
| Housing | Steel |
| Mount | Ceiling recessed mounting |
| Fixture rating | Enclosed |
| Environment | Internal |
| Fixture luminous flux (lm) | 3200 |
| Luminaire efficacy (lm/W) | 118.51 |
| LOR (%) | 100 |
| Colour temperature (K) | 3000 |
| Light colour | Warm White |
| CRI (Ra) | 80 |
| Colour Consistency (SDCM) | 3 |
| Glare control | < 19 |
| Photobiological Risk Group | RG0 |
| Total power consumption (W) | 27 |
| Electrical protection | Class I |
| Control gear type | Electronic ballast |
| Housing colour | RAL 9016 - Traffic white / Bezel |
| IP rating | IP20 |

RANA LINEAR R 3KLM WW LOUV+PRI 1-10
0052357

| | |
|--------------------|---------------|
| IK rating | IK07 |
| Product EAN number | 5410288523576 |
| Warranty | 5 years |

Photometry

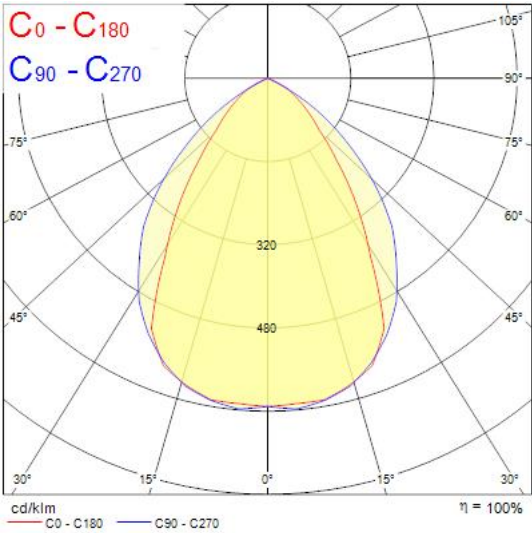

Technical drawings

