


Walraven RapidStrut® Stainless Steel channel

(M4505)

suspension and support

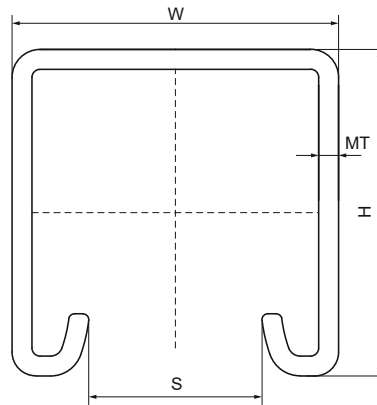

Features & benefits

- universal channel system
- distance between channel end and first hole is always equal
- a continuous graduated centimetre scale on one side
- inward formed flanges with serrated profile for extra grip
- type 41x41x2,5 tested for fire safety according EN1363-1
- material: stainless steel 1.4404 (AISI 316L)
- for more information about the max. allowed load (Faz) please refer to the loading tables or our online datasheet 'Walraven RapidStrut® Data Sheet'



| Product Number | VVS Number | Type | Total Height | Total Width | Total Length | Material Thickness | Profile Opening |
|-------------------------|------------|-----------|--------------|-------------|--------------|--------------------|-----------------|
| <i>Reference Letter</i> | | | <i>H</i> | <i>W</i> | <i>L</i> | <i>MT</i> | <i>S</i> |
| <i>Unit description</i> | | | <i>mm</i> | <i>mm</i> | <i>mm</i> | <i>mm</i> | <i>mm</i> |
| 6507327 | 18050420 | 41x21x2.5 | 21 | 41 | 3,000 | 2.50 | 22 |
| 6507347 | 18050421 | 41x41x2.5 | 41 | 41 | 3,000 | 2.50 | 22 |
| 6507627 | 18050422 | 41x21x2.5 | 21 | 41 | 6,000 | 2.50 | 22 |
| 6507647 | 18050442 | 41x41x2.5 | 41 | 41 | 6,000 | 2.50 | 22 |