

## Beacon LED Wallwash - High Output

BEACON WW LED HO 3K L3 WHT  
2059102



### PRODUCT OVERVIEW

Product name	BEACON WW LED HO 3K L3 WHT
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Track mounting
Environment	Internal
E-number FI	4276817
Warranty	5 years
Fixture luminous flux (lm)	4625
Luminaire efficacy (lm/W)	96
LOR (%)	100
Colour temperature (K)	3000
Light colour	Warm White
CRI (Ra)	85
Colour Consistency (SDCM)	3
Photobiological Risk Group	RG1
Total power consumption (W)	48
Electrical protection	Class I
Control gear type	Electronic ballast
Housing colour	White
IP rating	IP20
Product EAN number	5025768591022

### DATA TABLE

#### General data

Product name	BEACON WW LED HO 3K L3 WHT
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Track mounting
Environment	Internal
Performance ambient temperature Tq (°C)	25

## Beacon LED Wallwash - High Output

*BEACON WW LED HO 3K L3 WHT*  
2059102

E-number FI	4276817
Warranty	5 years

### Optical data

Fixture luminous flux (lm)	4625
Luminaire efficacy (lm/W)	96
LOR (%)	100
Colour temperature (K)	3000
Light colour	Warm White
CRI (Ra)	85
Colour Consistency (SDCM)	3
Adjustable chromaticity	N
Photobiological Risk Group	RG1

### Electrical data

Total power consumption (W)	48
Primary Supply/Product voltage - min (V)	220
Lamp power factor	0.98
Electrical protection	Class I
Control gear type	Electronic ballast
Drive current (mA)	1200
Energy Efficiency Class (A->G) of contained light source	D

### Physical data


Housing colour	White
IP rating	IP20
Diffuser finish	Diffuse
Diffuser material	PC Polycarbonate
Nominal Product Length (mm)	85
Nominal Product Width (mm)	170
Weight (kg)	1.65

### Packaging

Single packaging type	Carton
Product EAN number	5025768591022
Packaging single width (cm)	19.5
Packaging single depth (cm)	20.0
DUN14 (outer)	05025768591022
Packaging outer length / height (cm)	25.0

## PHOTOMETRY

## Beacon LED Wallwash - High Output *BEACON WW LED HO 3K L3 WHT* 2059102

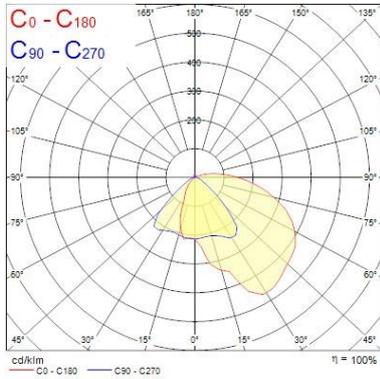

### TECHNICAL DRAWINGS

