



# ENERG

енергия · ενεργεια



10062102


alpha innotec

SWP 561H



55 °C

35 °C

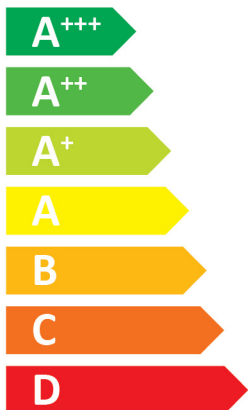

**59** dB



- dB

■ 52  
■ **52**  
■ 52  
kW

■ 54  
■ **54**  
■ 54  
kW





# ENERGY

10062102

alpha innotec

SWP 561H



55 °C

35 °C



**59** dB



- dB

■ 52  
■ **52**  
■ 52  
kW

■ 54  
■ **54**  
■ 54  
kW





# ENERG




енергия · ενεργεια



10062102

alpha innotec

SWP 561H + Luxtronik 2.05

+		<input type="checkbox"/>
+		<input type="checkbox"/>
+		<input checked="" type="checkbox"/>
+		<input type="checkbox"/>


package (heat pumps and combination heater with heat pump) - SWP 561H + Luxtronik 2.05

Seasonal space heating energy efficiency of heat pump ( $\eta_s$ ) ① 138 %

**Rated heat output of the heat pump ( $P_{rated}$  kW)** 52

Temperature control Class VII (Table 1) + ② 3,5 %

Supplementary boiler  
package with hot water storage tank no  $P_{sup}$  kW (rated heat output of supplementary heater)

$\eta_s$  % ( $\sigma_{\pi}$ )  $(\eta_s \% (sup) - ①) \times (\alpha_{WP}) =$  - ③

( $\alpha_{WE}$ : see Table 3)  $(\alpha_{WE})$


solar contribution  $(A_{Koll} m^2)$   $(\eta_{Koll} \%)$   
 $(V_{Sp} m^3)$   $(standstill\ heat\ loss\ of\ the\ hot\ water\ storage\ tank\ in\ W)$   
 $(\eta_{Sp}: Table\ 2)$

$((294/P_{rated} \times 11) \times (A_{Koll} m^2) + (115/P_{rated} \times 11) \times (V_{Sp} m^3)) \times 0,45 \times ((\eta_{Koll} \%) / 100) \times (\eta_{Sp}) =$  + ④

Seasonal space heating energy efficiency of package ⑤ 141 %

*rounded to the nearest integer*

Seasonal space heating energy efficiency class of package

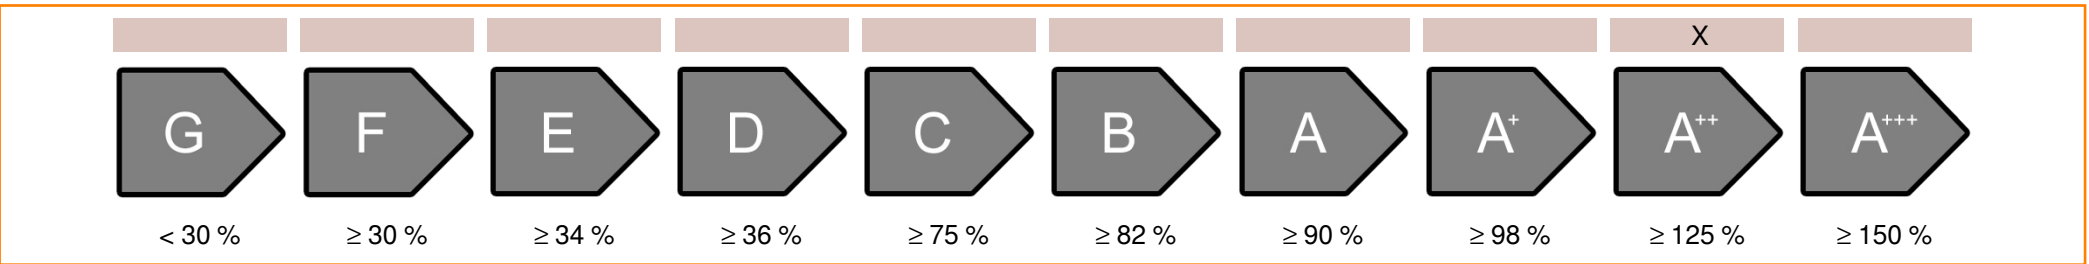

Seasonal space heating energy efficiency under colder or warmer climate conditions

**Seasonal space heating energy efficiency of the heat pump ( $\eta_s$ ) under colder climate conditions** 141 %

**Seasonal space heating energy efficiency of the heat pump ( $\eta_s$ ) under warmer climate conditions** 139 %

colder ⑤ 141 -V -3 = 144 warmer ⑤ 141 +VI 1 = 142

<b>heatpump datasheet:</b>			
<b>manufacturer:</b>	alpha innotec		
<b>model:</b>	SWP 561H		
<b>Information concerning energy efficiency class and rated heat output:</b>			
	average / low	average / medium	
energy efficiency class space heater:	A+++	A++	-
rated heat output:	54	52	kW
energy efficiency space heater:	181	138	%
annual final energy consumption space heater	23745	29660	kWh
sound power level indoors		59	dB
<b>special precautions concerning assembly, installation or maintenance</b>			
All instructional work in this manual may only be carried out by qualified specialist personnel in compliance with local regulations.			
<b>additional information</b>	low	medium	
rated heat output colder climate	54	52	kW
rated heat output warmer climate	54	52	kW
energy efficiency space heater colder climate	185	141	%
energy efficiency space heater warmer climate	183	139	%
annual energy consumption space heater colder climate	27699	34583	kWh
annual energy consumption space heater warmer climate	15213	19024	kWh
sound power level outdoors		-	dB

<b>technical data of the temperature controller</b>		
<b>manufacturer:</b>	<b>alpha innotec</b>	
<b>model:</b>	<b>Luxtronik 2.05</b>	
controller class	VII	-
contribution of the controller to the energy efficiency space heater	3,5	%

<b>Model</b>				<b>SWP 561H</b>			
Air-to-water heat pump: (yes/no)				no			
Brine-to-water heat pump: (yes/no)				yes			
Water-to-water heat pump: (yes/no)				no			
Low-temperature heat pump: (yes/no)				no			
Equipped with supplementary heater: (yes/no)				yes			
combination heater with: (yes/no)				no			
application: (low/medium)				medium			
climate: (colder/average/warmer)				average			
<b>Item</b>	<b>Symbol</b>	<b>Value</b>	<b>Unit</b>	<b>Item</b>	<b>Symbol</b>	<b>Value</b>	<b>Unit</b>
<b>Rated heat output</b>	Prated	52	kW	<b>Seasonal space heating energy efficiency</b>	$\eta_S$	137,9	%
<b>Declared coefficient of performance for part load at indoor temperature 20°C and outdoor temperature Tj</b>				<b>Declared coefficient of performance for part load at indoor temperature 20°C and outdoor temperature Tj</b>			
Tj = -7°C	Pdh	52,6	kW	Tj = -7°C	COPd	3,09	-
Tj = +2°C	Pdh	53,4	kW	Tj = +2°C	COPd	3,59	-
Tj = +7°C	Pdh	53,9	kW	Tj = +7°C	COPd	3,98	-
Tj = +12°C	Pdh	54,4	kW	Tj = +12°C	COPd	4,43	-
Tj = bivalent temperature	Pdh	52,4	kW	Tj = bivalent temperature	COPd	2,97	-
Tj = operation limit temperature	Pdh	52,4	kW	Tj = operation limit temperature	COPd	2,97	-
For air-to-water heat pumps: Tj = -15°C (if TOL < -20°C)	Pdh	-	kW	For air-to-water heat pumps: Tj = -15°C (if TOL < -20°C)	COPd	-	-
Bivalent temperature	T <sub>biv</sub>	-10	°C	For air-to-water heat pumps: Operation limit temperature	TOL	-10	°C
Cycling interval capacity for heating	P <sub>cyh</sub>	-	kW	Cycling interval efficiency	COP <sub>cyh</sub>	-	-
Degradation co-efficient (**)	Cdh	1,0	-	Heating water operating limit temperature	WTOL	70	°C
<b>Power consumption in modes other than active mode</b>				<b>Supplementary heater</b>			
Off mode	P <sub>OFF</sub>	0,015	kW	Rated heat output	P <sub>sup</sub>	-	kW
Thermostat-off mode	P <sub>TO</sub>	0,015	kW	Type of energy input	electrical		
Standby mode	P <sub>SB</sub>	0,015	kW				
Crankcase heater mode	P <sub>CK</sub>	-	kW				
<b>Other items</b>							
Capacity control	fixed			For air-to-water heat pumps: Rated air flow rate, outdoors	-	-	m <sup>3</sup> /h
sound power level, indoors/outdoors	L <sub>WA</sub>	59 / -	dB	For water-/brine-to-water heat pumps: Rated brine or water flow rate, outdoor heat exchanger	-	13	m <sup>3</sup> /h
Emissions of nitrogen oxides	NO <sub>x</sub>	-	mg/kWh				
<b>For heat pump combination heater:</b>							
Declared load profile	-			Water heating energy efficiency	$\eta_{wh}$	-	%
Daily electricity consumption	Q <sub>elec</sub>	-	kWh	Daily fuel consumption	Q <sub>fuel</sub>	-	kWh
<b>Contact details</b>	ait deutschland GmbH Industriestr. 3 95359 Kasendorf Germany						
(*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).							
(**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.							

<b>Model</b>				<b>SWP 561H</b>			
Air-to-water heat pump: (yes/no)				no			
Brine-to-water heat pump: (yes/no)				yes			
Water-to-water heat pump: (yes/no)				no			
Low-temperature heat pump: (yes/no)				no			
Equipped with supplementary heater: (yes/no)				yes			
combination heater with: (yes/no)				no			
application: (low/medium)				low			
climate: (colder/average/warmer)				average			
<b>Item</b>	<b>Symbol</b>	<b>Value</b>	<b>Unit</b>	<b>Item</b>	<b>Symbol</b>	<b>Value</b>	<b>Unit</b>
<b>Rated heat output</b>	Prated	54	kW	<b>Seasonal space heating energy efficiency</b>	$\eta_S$	181,1	%
<b>Declared coefficient of performance for part load at indoor temperature 20°C and outdoor temperature Tj</b>				<b>Declared coefficient of performance for part load at indoor temperature 20°C and outdoor temperature Tj</b>			
Tj = -7°C	Pdh	54,4	kW	Tj = -7°C	COPd	4,44	-
Tj = +2°C	Pdh	54,6	kW	Tj = +2°C	COPd	4,69	-
Tj = +7°C	Pdh	54,8	kW	Tj = +7°C	COPd	4,92	-
Tj = +12°C	Pdh	55,0	kW	Tj = +12°C	COPd	5,16	-
Tj = bivalent temperature	Pdh	54,3	kW	Tj = bivalent temperature	COPd	4,44	-
Tj = operation limit temperature	Pdh	54,3	kW	Tj = operation limit temperature	COPd	4,44	-
For air-to-water heat pumps: Tj = -15°C (if TOL < -20°C)	Pdh	-	kW	For air-to-water heat pumps: Tj = -15°C (if TOL < -20°C)	COPd	-	-
Bivalent temperature	T <sub>biv</sub>	-10	°C	For air-to-water heat pumps: Operation limit temperature	TOL	-10	°C
Cycling interval capacity for heating	P <sub>cyh</sub>	-	kW	Cycling interval efficiency	COP <sub>cyh</sub>	-	-
Degradation co-efficient (**)	Cdh	1,0	-	Heating water operating limit temperature	WTOL	70	°C
<b>Power consumption in modes other than active mode</b>				<b>Supplementary heater</b>			
Off mode	P <sub>OFF</sub>	0,015	kW	Rated heat output	P <sub>sup</sub>	-	kW
Thermostat-off mode	P <sub>TO</sub>	0,015	kW	Type of energy input	electrical		
Standby mode	P <sub>SB</sub>	0,015	kW				
Crankcase heater mode	P <sub>CK</sub>	-	kW				
<b>Other items</b>							
Capacity control	fixed			For air-to-water heat pumps: Rated air flow rate, outdoors	-	-	m <sup>3</sup> /h
sound power level, indoors/outdoors	L <sub>WA</sub>	59 / -	dB	For water-/brine-to-water heat pumps: Rated brine or water flow rate, outdoor heat exchanger	-	13	m <sup>3</sup> /h
Emissions of nitrogen oxides	NO <sub>x</sub>	-	mg/kWh				
<b>For heat pump combination heater:</b>							
Declared load profile	-			Water heating energy efficiency	$\eta_{wh}$	-	%
Daily electricity consumption	Q <sub>elec</sub>	-	kWh	Daily fuel consumption	Q <sub>fuel</sub>	-	kWh
<b>Contact details</b>	ait deutschland GmbH Industriestr. 3 95359 Kasendorf Germany						
(*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).							
(**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.							