

# Optix Linear Surface 1200 Direct-Indirect SylSmart

*OPTIX LINEAR SURFACE 1200 D/I 4000K ALU SSC*

2023815



## Product features

- OPTIX LINEAR SURFACE 1200 D/I 4000K ALU SSC is a high efficacy low glare linear luminaire for office and education applications. Suitable for continuous light line installations with accessories separately available. Direct / Indirect lighting with 80% downlight and 20% uplight ratio for ceiling suspended mounting. Size: 1129x90x80mm. Aluminised plastic extra low glare optics in a single line configuration. White RAL9016 fixture body. SylSmart Standalone capable. 4000K Neutral White LED, CRI>80, chromaticity tolerance of 3-step MacAdam ellipse. Luminous flux 4500lm. Power consumption 30W. Luminaire efficacy 150lm/W. Lifespan: 48,500 hours L90B10. UGR<19, Luminance at 65°<200 Cd/m<sup>2</sup>, IK07, IP20. Ultra Low Flicker: <5% Photobiological safety risk group 1. Electrical protection Class I. Glow wire test 850°C.



## PRODUCT OVERVIEW


Product name	OPTIX LINEAR SURFACE 1200 D/I 4000K ALU SSC
Technology	LED (3 SDCM)
Cap/Base	N/A
Housing	Steel
Mount	Suspended
Fixture rating	Enclosed
General application	Education, Office
ETIM Class	EC002892
Warranty	5 years
Useful luminous flux (Fuse)	4500
Fixture luminous flux (lm)	4500
Luminous flux (lm)	4500
Luminaire efficacy (lm/W)	150
Correlated colour temperature (k)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Glare control	< 16
Photobiological Risk Group	RG1
Total power consumption (W)	30
Electrical protection	Class I
Control gear type	LED driver constant current
Dimmable	Yes
Dimming method	SylSmart SSC
LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL 9016 - Traffic white / Bezel
IP rating	IP20
IK rating	IK07
Product EAN number	5025768238156

## Optix Linear Surface 1200 Direct-Indirect SylSmart

*OPTIX LINEAR SURFACE 1200 D/I 4000K ALU SSC*

2023815

### PHOTOMETRY

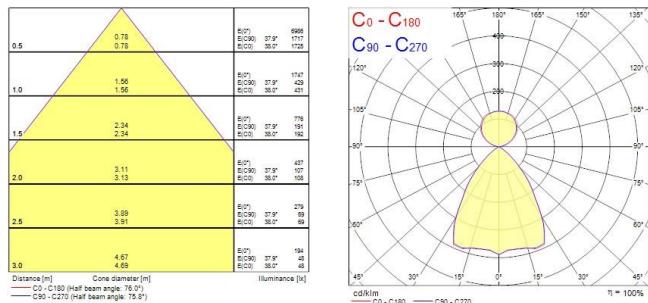

### TECHNICAL DRAWINGS

