



PHOTOMETRIC LIGHT REPORT

LED strip | 24V | 60LED/m 5050 | 5m | IP52 | RGB

Article number: 127-010



Go to the
webshop
of Tronix
Lighting



TRONIX



127-010 LED strip | 24V | 60LED/m 5050 | 5m | IP52 | RGB

Introduction

Purpose of this Document

This document provides accurate and objective photometric data for Tronix Lighting item 127-010. All information is based on actual measurements taken from standard production units. No modifications were made to enhance performance results. In some cases, minor adjustments—such as temporary removal of covers, cables, or mounting features—were necessary for testing purposes. These did not influence product performance.

Test Methodology

Testing was conducted using randomly selected, unopened samples from regular inventory. All tests comply with the LM-79-19 standard, the recognized method for photometric and electrical measurements of LED and OLED luminaires. This standard, an update of IES LM-79-2008, outlines environmental test conditions, stabilization procedures, measurement methods, and approved instruments. It uses absolute photometry, meaning results directly reflect the performance of the tested product, without comparison to rated lamp standards.

Product 127-010 was tested using:

- A photogoniometer to measure luminous intensity distribution at various angles
- An integrating sphere to determine total luminous flux and colour characteristics

Compliance & Certification

Item 127-010 meets the requirements of the following EU directives. Tronix Lighting certifies that all relevant tests were executed in accordance with the applicable standards, and the CE mark is applied accordingly:

- General Product Safety – Directive 2023/988/EC
- Low Voltage Directive (LVD) – Directive 2014/35/EU
- Electromagnetic Compatibility (EMC) – Directive 2004/108/EC
- Ecodesign – Directive 2009/125/EC
- RoHS 3 – Directive 2011/65/EU + Amendment 2015/863/EU

Recycling & Sustainability

Tronix Lighting is affiliated with national recycling systems for electrical and electronic waste. The luminaire is over 90% recyclable when disposed of as electronic waste at end of life. In addition, Tronix Lighting participates in national packaging recycling schemes, ensuring full compliance with both the WEEE and packaging directives.

127-010 LED strip | 24V | 60LED/m 5050 | 5m | IP52 | RGB

Laboratory and equipment

Laboratory owner and location
Gonio spectrometer system and type
Spectrometer manufacturer and model

Flicker meter manufacturer and model
Oscilloscope manufacturer and model
Power meter manufacturer and model

Power source manufacturer and model

Datalogger Manufacturer and Model

Tronix Lighting BV. Uden. The Netherlands
Viso Systems Type C. horizontal
(Gonio) Ocean Optics STS VIS
(Sphere) Admesy HERA VIS 380–780nm
Viso Systems LabFlicker
Tektronix MDO3024 oscilloscope (4 Channels. 200 MHz)
Vitretek PA900 Precision Multi-Channel Harmonic Power
Analyzer
(DC) Keithley Source Measure Unit SMU-2420 3A DC
Source Meter
(AC) Chroma 61601 AC Source
Omega 8-Channel Thermocouple Thermometer/Data
Logger

Measurement conditions gonio spectrometer

Number of C-planes and Resolution
 γ (gamma)-Resolution
Test Distance
Room Temperature and Humidity
Input Power. Power and Displacement Factors
Frequency of Input Power
Warm-up Time and Variation

2 planes – 180°
1.5°
1.14 m
22°C +/- 10% – RH 50% +/- 20%
15.0 W – PF 1.0 – DPF 0.7
0 Hz
n/a – n/a%

Tested light source

Manufacturer and Order Code
Product Description

Tronix Lighting – 127-010
LED strip | 24V | 60LED/m 5050 | 5m | IP52 | RGB

Main Light Measurement Results

Output – Total Lumen (Up% / Down%)
Efficiency
Energy efficiency class
Peak Intensity and Beam Angle
Correlated Colour Temperature
Colour Shift. CIE u_{uv}
Colour Rendering Index
Colour Rendering TM30-18
Television Lighting Consistency Index
Flicker

621 lm – 0% / 100%
42 lm/W
G
164 cd – 136°
CCT = 0 K
Duv n/a
CRI 0.0
 R_f 0.0 – R_g 0.0
TLCI = n/a
SVM n/a – PstLM n/a

127-010 LED strip | 24V | 60LED/m 5050 | 5m | IP52 | RGB

Electrical measurement details

Input Power


RMS Input voltage feed. V_{RMS} 24.0 V
 RMS Input current feed. I_{RMS} 0.623 A
 Total input power 15.0 W

Frequency of input power 0 Hz
 Power factor 1.0
 Displacement power factor 0.7

Total harmonic distortion of the current 0%
 Total harmonic distortion of the voltage 0%

Input Power Curve

Voltage - Current



Efficiency

Radiated power efficiency: 19.0%




Lumen efficiency: 42 lm/W



Harmonics

3rd Harmonic n/a
 5th Harmonic n/a
 7th Harmonic n/a
 9th Harmonic n/a
 11th Harmonic n/a

Current Harmonics %

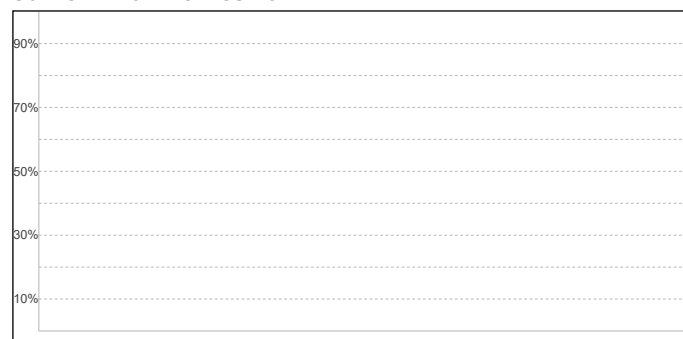

Stabilization Details

Warm-up Conditions

Stable period
 Stable change max
 Minimum warm-up time

Colour temperature change during warm-up

n/a CCT start n/a K
 n/a% CCT shift n/a K
 n/a CCT end 0 K

Warm-up Results

Total warmup time
 Warmup variation

Output intensity change during warm-up


n/a Output start n/a lm
 n/a% Output change n/a lm
 Output end 621 lm




127-010 LED strip | 24V | 60LED/m 5050 | 5m | IP52 | RGB

Colour measurement details


Total lumen output	621 lm
Correlated Colour Temperature	0 K
Colour coordinates CIE 1931	(x;y) = (0.219;0.249)
Colour deviation from BBL	Duv = n/a
TM30-18 Colour Fidelity Index	R _f 0.0
TM30-18 Colour Gamut Index	R _g 0.0
Colour Rendering Index (Ra)	CRI 0.0
Colour Rendering Index. (red component)	R9 = 0.0
Colour Quality Scale	CQS = 0.0
Television Lighting Consistency Index	TLCI = n/a

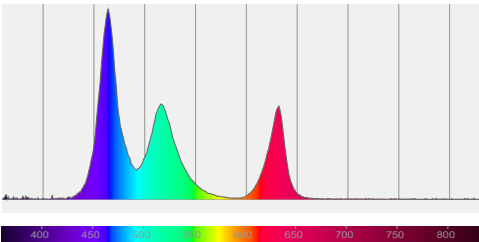

Relative spectral power distribution

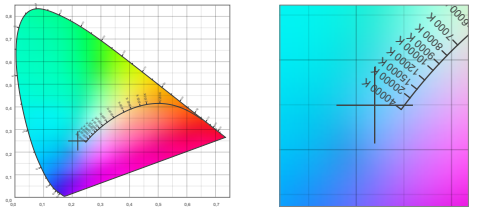

TM30 details

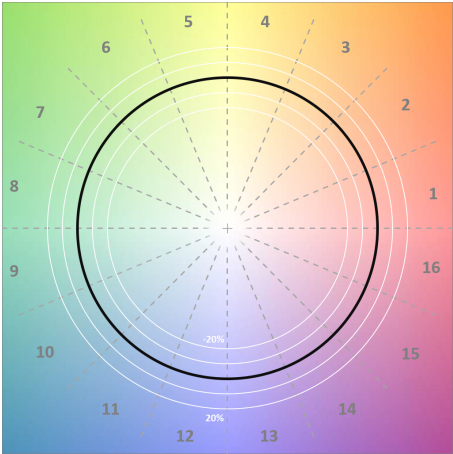

TM30 Colour vectors per hue bin



TM30 Colour distortion

		Shifts (%)	
Hue Bin	R _f	Chroma	Hue
C1	0	0%	0%
C2	0	0%	0%
C3	0	0%	0%
C4	0	0%	0%
C5	0	0%	0%
C6	0	0%	0%
C7	0	0%	0%
C8	0	0%	0%
C9	0	0%	0%
C10	0	0%	0%
C11	0	0%	0%
C12	0	0%	0%
C13	0	0%	0%
C14	0	0%	0%
C15	0	0%	0%
C16	0	0%	0%

Table with 15 empty rows for TM30-18 Rf-values per reference colour.

TM30-18 Rf-values per reference colour

Table with 16 empty rows for TM30-18 Rf-values per hue bin.

TM30-18 Rf-values per hue bin

Table with 16 empty rows for TM30 Chroma shift.

TM30 Chroma shift

Colour Quality details

Table with 15 empty rows for Colour Rendering Index.

Colour Rendering Index

Table with 15 empty rows for Colour Quality Scale.

Colour Quality Scale

127-010 LED strip | 24V | 60LED/m 5050 | 5m | IP52 | RGB

Flicker / temporal light artefacts details

Measurement conditions

Flicker meter type	Viso Systems LabFlicker
Flicker/TLA sample rate	n/a samples/s
Measurement time	5x 180 seconds (15 minutes) for PstLM. 1.2 sec for all other indices

Flicker indices according to Illuminating Engineering Society (IES)


Flicker frequency	n/a Hz
Percent flicker	n/a %
Flicker index	n/a

TLA indices (according IEC TR 61547-1, EN 61000-3-3 and EN 61000-4-15)


An LED luminaire is considered flicker-free if the SVM value is ≤ 0.4 and if the PstLM value is ≤ 1.0

PstLM value ($F < 80$ Hz)	n/a
SVM value ($80 < F < 2000$ Hz)	n/a


Flicker frame (one flicker period in time domain)

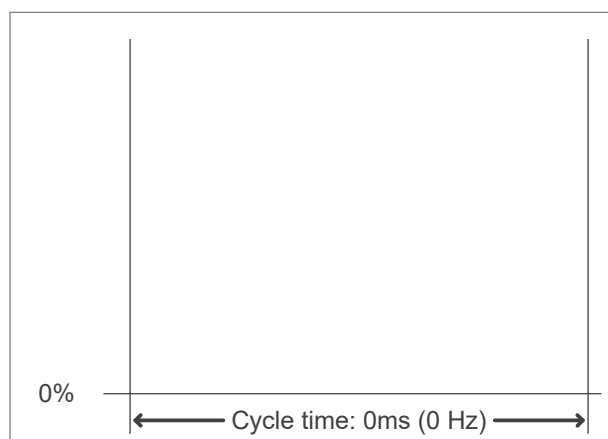

Flicker FFT (flicker curve in frequency domain)

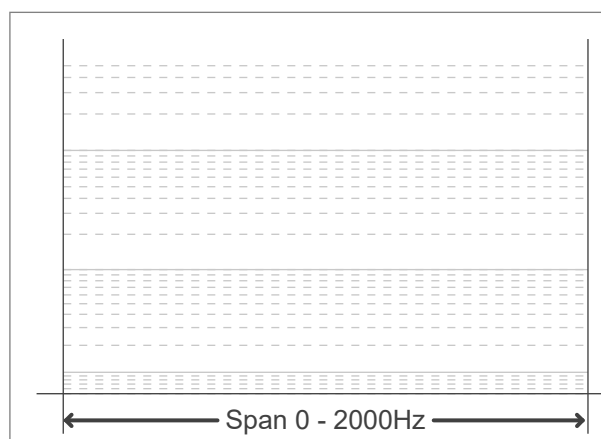

IEEE 1789-2015 Lighting Flicker Risk Zones

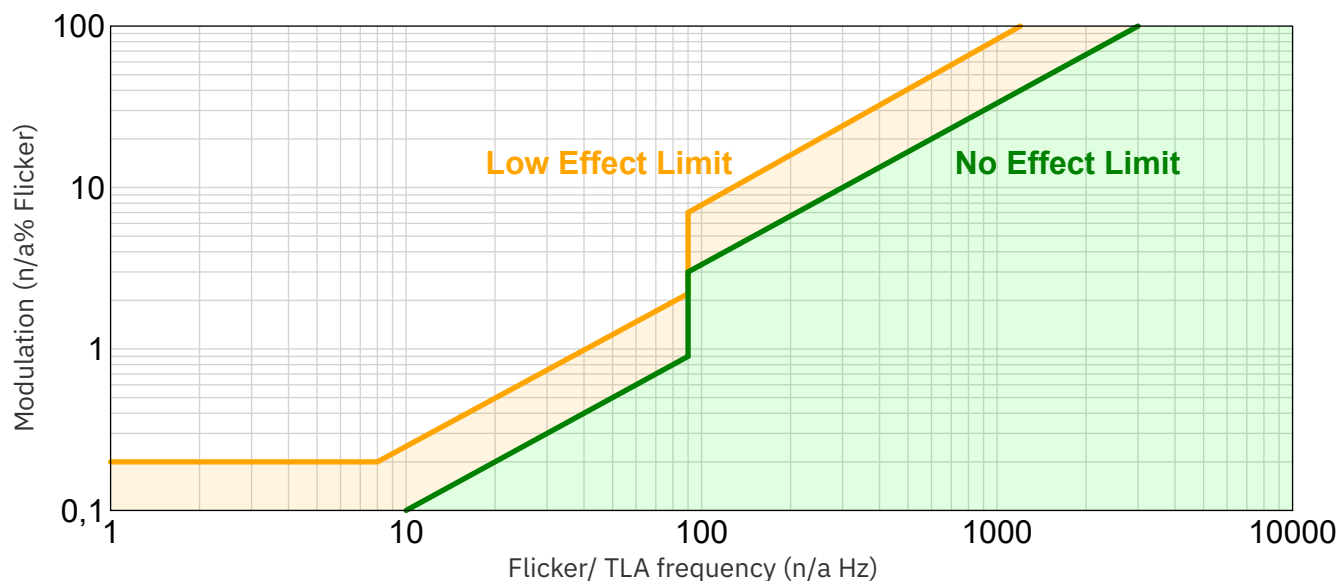


Document revision date: 1-7-2025 Measurement serial: VFR-250213-2632-MS

127-010 LED strip | 24V | 60LED/m 5050 | 5m | IP52 | RGB

Beam angle

Luminous Intensity diagram

Unit: 0-100% of peak intensity

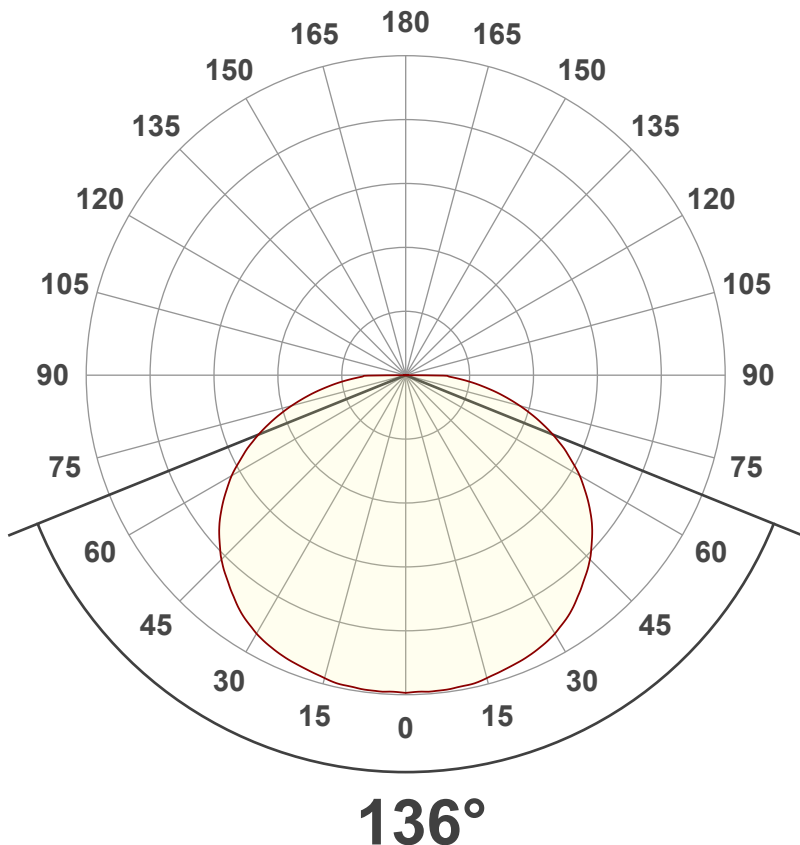

Main Values

Output (total Lumen)	621 lm
Lumen Up/Down	0% / 100%
Peak Intensity	164 cd
Beam Angle (50%)	136°
Beam Angle (90%)	136°
Beam Angle (10%)	136°

Cut-off Angle

Average 2.5%	179.9°
--------------	--------

Field Angle

Average 10%	179°
-------------	------


Intensity Ratio

In 120° cone	69.9%
In 90° cone	44.8%

C planes

C000-C180
C090-C270


Linear distribution diagram - Intensity (candela) vs γ-angle

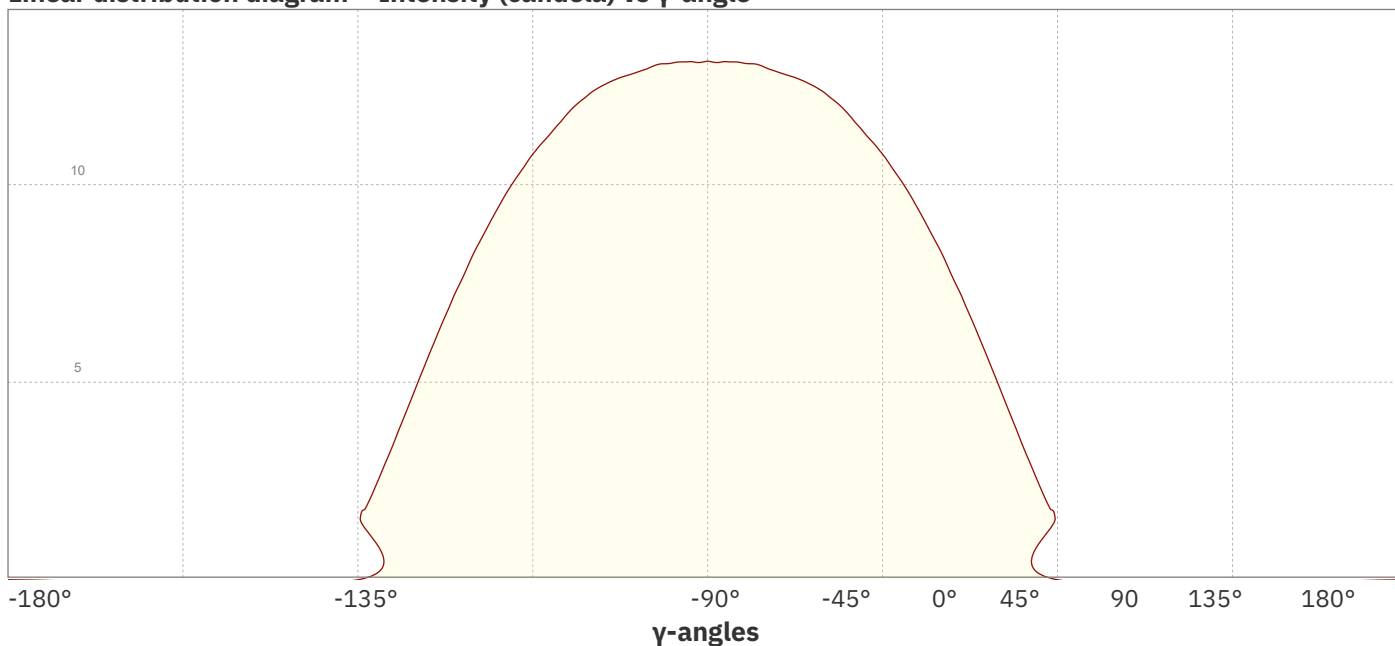

Document revision date: 1-7-2025 Measurement serial: VFR-250213-2632-MS

127-010 LED strip | 24V | 60LED/m 5050 | 5m | IP52 | RGB

Beam Details

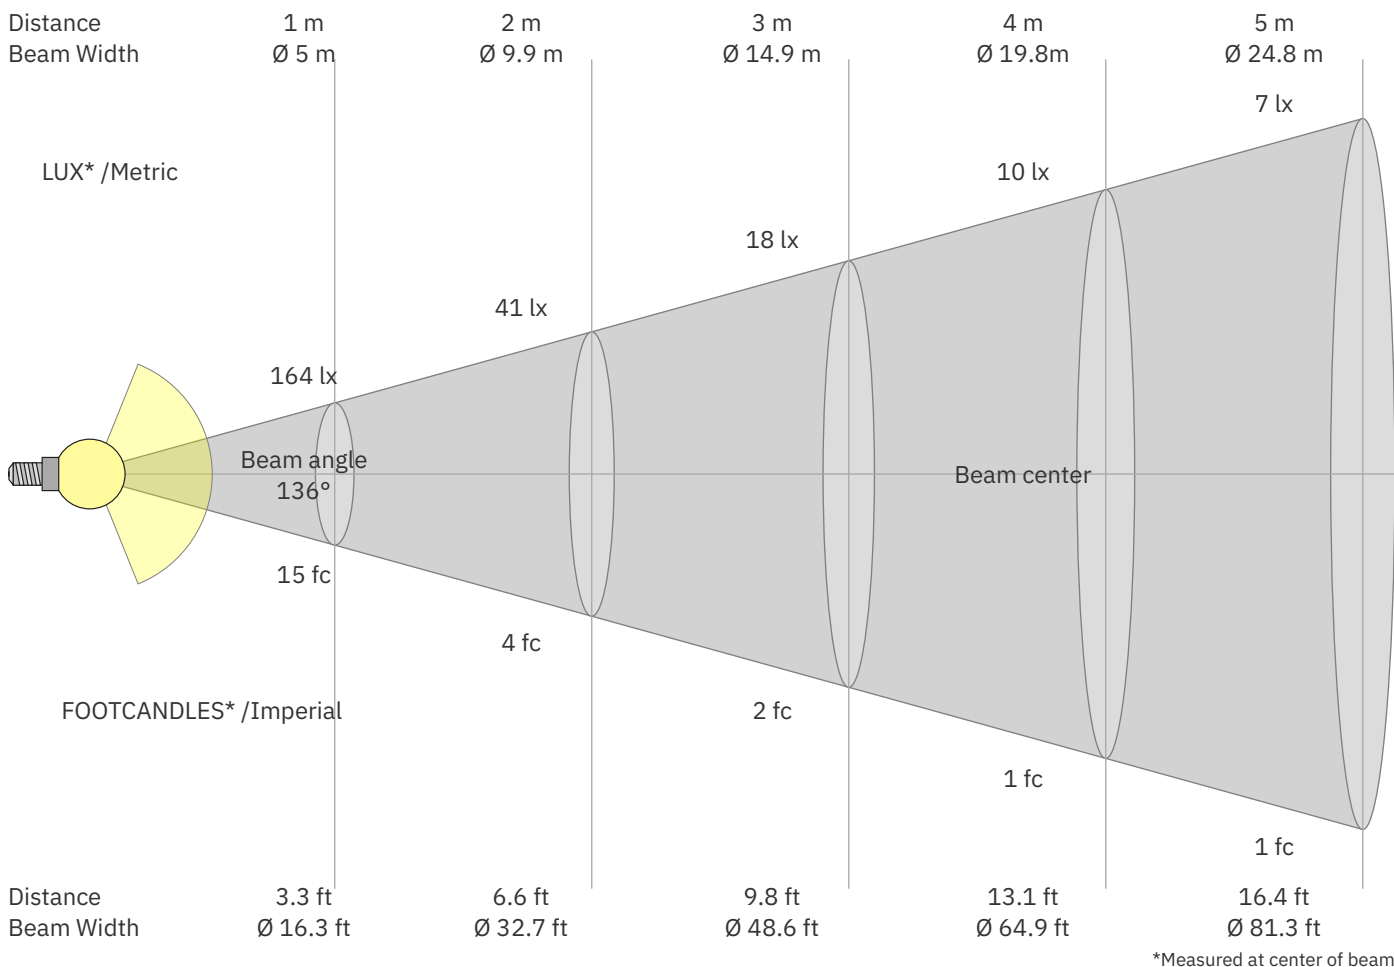

Beam intensities from 1 – 20 m

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	m
3.3	6.6	9.8	13.1	16.4	19.7	23	26.2	29.5	32.8	36.1	39.4	42.7	45.9	49.2	52.5	55.8	59.1	62.3	65.6	ft
164	41	18	10	7	5	3	3	2	2	1	1	1	1	1	1	1	1	0	0	lux
15.2	3.8	1.7	1	0.6	0.4	0.3	0.2	0.2	0.2	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0	0	0	fc

Intensities in 0° c-plane

0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°	γ
164	164	163	162	160	158	154	149	142	135	126	115	104	91	76	61	46	31	3	0	cd
100%	100%	100%	99%	97%	96%	94%	91%	86%	82%	77%	70%	63%	55%	46%	37%	28%	19%	2%	0%	of 0°val

Intensities in 90° c-plane

0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°	γ
164	164	163	162	160	158	154	149	142	135	126	115	104	91	76	61	46	31	3	0	cd
100%	100%	100%	99%	97%	96%	94%	91%	86%	82%	77%	70%	63%	55%	46%	37%	28%	19%	2%	0%	of 0°val

Intensities in 180° c-plane

0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°	γ
164	164	163	162	160	158	154	149	142	135	126	115	104	91	76	61	46	31	3	0	cd
100%	100%	100%	99%	97%	96%	94%	91%	86%	82%	77%	70%	63%	55%	46%	37%	28%	19%	2%	0%	of 0°val

Intensities in 270° c-plane

0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°	γ
164	164	163	162	160	158	154	149	142	135	126	115	104	91	76	61	46	31	3	0	cd
100%	100%	100%	99%	97%	96%	94%	91%	86%	82%	77%	70%	63%	55%	46%	37%	28%	19%	2%	0%	of 0°val

Document revision date: 1-7-2025 Measurement serial: VFR-250213-2632-MS

127-010 LED strip | 24V | 60LED/m 5050 | 5m | IP52 | RGB

Light Planning – UGR table

Uncorrected, comprehensive UGR table according to CIE 117-1995

Reflectances		70	70	50	50	30	70	70	50	50	30
ρ Ceiling		70	70	50	50	30	70	70	50	50	30
ρ Walls		50	30	50	30	30	50	30	50	30	30
ρ Floor		20	20	20	20	20	20	20	20	20	20
Room size		Viewed Crosswise					Viewed Endwise				
H = mounting height above eye level		(Viewing direction orthogonal to lamp length axis)					(Viewing direction parallel to lamp length axis)				
X	Y										
2H	2H	22.9	24.2	23.2	24.6	24.8	24.9	26.3	25.2	26.6	26.8
	3H	24.3	25.7	24.7	26.0	26.2	26.9	28.3	27.3	28.6	28.8
	4H	24.9	26.3	25.3	26.5	26.8	27.9	29.2	28.3	29.5	29.8
	6H	25.5	26.7	25.8	26.9	27.3	28.9	30.1	29.2	30.3	30.7
	8H	25.6	26.8	26.0	27.1	27.5	29.3	30.4	29.6	30.7	31.2
	12H	25.7	26.9	26.1	27.2	27.7	29.7	30.8	30.1	31.1	31.6
4H	2H	23.7	25.0	24.1	25.3	25.6	25.2	26.6	25.7	26.9	27.1
	3H	25.4	26.5	25.7	26.8	27.3	27.5	28.6	27.9	28.9	29.4
	4H	26.0	27.1	26.5	27.5	28.0	28.5	29.5	29.0	30.0	30.5
	6H	26.6	27.6	27.1	28.0	28.3	29.5	30.5	30.0	30.9	31.2
	8H	26.8	27.7	27.3	28.1	28.5	30.0	30.9	30.5	31.3	31.7
	12H	27.0	27.8	27.5	28.2	28.7	30.5	31.2	31.0	31.7	32.2
8H	4H	26.4	27.3	26.9	27.7	28.1	28.7	29.5	29.2	29.9	30.3
	6H	27.2	27.9	27.7	28.4	28.9	29.8	30.5	30.3	31.0	31.5
	8H	27.5	28.1	28.0	28.7	29.3	30.4	31.0	30.9	31.5	32.2
	12H	27.8	28.3	28.3	28.8	29.4	30.9	31.5	31.5	32.0	32.6
12H	4H	26.5	27.3	27.0	27.7	28.2	28.6	29.4	29.1	29.8	30.3
	6H	27.3	28.0	27.8	28.5	29.1	29.8	30.5	30.4	31.0	31.6
	8H	27.7	28.2	28.3	28.7	29.3	30.4	31.0	31.0	31.5	32.1
Variations with the observer position for the luminaire spacings. S:											
S = 1.0H		0.1 / -0.1					0.1 / -0.1				
S = 1.5H		0.1 / -0.2					0.3 / -0.3				
S = 2.0H		0.4 / -0.5					0.8 / -0.7				

Coefficients of Utilization

Ceiling reflectance	80			70			50			30			10			0		
Wall reflectance	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
Floor reflectance	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	0
RCR	(RCR: Room Cavity Ratio)																	
	Room Values are expressed as percentage of Lumen delivered to the task surface																	
0	119	119	119	119	116	116	116	116	111	111	106	106	106	102	102	102	100	
1	106	101	96	91	104	98	94	89	94	90	86	90	87	84	86	84	81	79
2	96	86	78	72	93	84	77	71	81	74	69	77	72	68	74	70	66	64
3	86	75	66	58	84	73	65	58	70	63	57	67	61	56	64	59	55	52
4	79	66	56	48	76	64	55	48	62	54	47	59	52	47	57	51	46	44
5	72	58	48	41	70	57	48	41	55	47	40	53	46	40	51	44	39	37
6	66	52	42	35	64	51	42	35	49	41	35	47	40	35	46	39	34	32
7	61	47	38	31	59	46	37	31	44	36	31	43	36	30	42	35	30	28
8	57	43	34	27	55	42	33	27	41	33	27	39	32	27	38	32	27	25
9	53	39	30	24	52	38	30	24	37	30	24	36	29	24	35	29	24	22
10	50	36	28	22	48	35	27	22	34	27	22	33	27	22	32	26	22	20