

Data Sheet | Item Number: 713-1415/117-000


THR male header, 2-row; 0.8 x 0.8 mm solder pin; straight; 100% protected against mismatching; Threaded flange; Pin spacing 3.5 mm; 30-pole; black

<https://www.wago.com/713-1415/117-000>



Color: ■ black

Similar to illustration

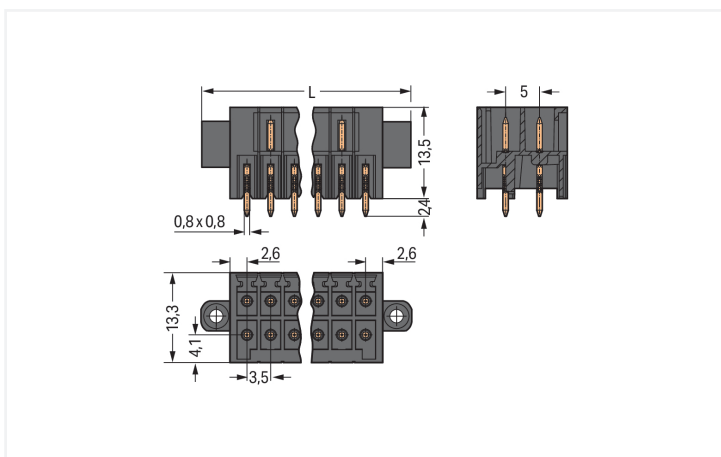

Dimensions in mm

$L = [(pole\ no./2) - 1] \times pin\ spacing + 13.6\ mm$



Male connector, 713 Series, solder pin dimensions 0.8 x 0.8 mm

This male connector (item number 713-1415/117-000) is designed for hassle-free electrical installations. The item's dimensions are (62.6 x 15.9 x 13.3) mm (width x height x depth).

The contact surface is coated with tin. The pcb connector is designed for THR soldering.

Notes

Safety Information

The MCS – MULTI CONNECTION SYSTEM includes connectors without breaking capacity in accordance with DIN EN 61984. When used as intended, these connectors must not be connected/disconnected when live or under load. When used as intended, these connectors must not be connected/disconnected when live or under load. The circuit design should ensure header pins, which can be touched, are not live when unmated.

Variants:

Other pole numbers
Other solder pin lengths
Gold-plated or partially gold-plated contact surfaces
Other versions (or variants) can be requested from WAGO Sales or configured at <https://configurator.wago.com/>.

Electrical data

Ratings per	IEC/EN 60664-1			Approvals per	UL 1059		
Overvoltage category	III	III	II	Use group	B	C	D
Pollution degree	3	2	2	Rated voltage	150 V	50 V	-
Nominal voltage	80 V	160 V	250 V	Rated current	10 A	10 A	-
Rated impulse withstand voltage	2.5 kV	2.5 kV	2.5 kV				
Rated current	10 A	10 A	10 A				

Approvals per	CSA		
Use group	B	C	D
Rated voltage	150 V	-	-
Rated current	12 A	-	-

Connection Data

Total number of potentials	30	Connection 1	
Number of connection types	1	Pole number	30
Number of levels	2		

Physical data

Pin spacing	3.5 mm / 0.138 inches
Width	62.6 mm / 2.465 inches
Height	15.9 mm / 0.626 inches
Height from the surface	13.5 mm / 0.531 inches
Depth	13.3 mm / 0.524 inches
Solder pin length	2.4 mm
Solder pin dimensions	0.8 x 0.8 mm
Plated through-hole diameter (THR)	1.3 (+0.1) mm

Mechanical data

Variable coding	Yes
Anti-rotation protection	Yes

Plug-in connection

Contact type (pluggable connector)	Male connector/plug
Connector (connection type)	for PCB
Mismating protection	Yes
Mating direction to the PCB	90 °
Locking of plug-in connection	Threaded flange

PCB contact

PCB contact	THR
Solder pin arrangement	over the entire male connector (in-line)
Number of solder pins per potential	1

Material data

Note (material data)	Information on material specifications can be found here
Color	black
Material group	I
Insulation material (main housing)	Polyphthalamide (PPA GF)
Flammability class per UL94	V0
Contact material	Electrolytic copper (E _{Cu})
Contact Plating	Tin
Fire load	0.163 MJ
Weight	8.1 g
MSL per J-STD 020D	1

Environmental requirements

Limit temperature range	-60 ... +100 °C
Processing temperature	-35 ... +60 °C

Commercial data

Product Group	3 (Multi Conn. System)
PU (SPU)	20 pcs
Packaging type	Box
Country of origin	PL
GTIN	4050821156529
Customs tariff number	85366930000

Product Classification

UNSPSC	39121409
eCl@ss 10.0	27-44-04-02
eCl@ss 9.0	27-44-04-02
ETIM 9.0	EC002637
ETIM 10.0	EC002637
ECCN	NO US CLASSIFICATION

Environmental Product Compliance

RoHS Compliance Status	Compliant,With Exemption
RoHS Exemption	6(c)
SCIP notification number (Austria)	0bf9d577-beeb-4882-986a-c9d6cdabadb9
SCIP notification number (Belgium)	67609a7a-713c-4db0-91c2-9ea0e6289bc6
SCIP notification number (Bulgaria)	46831299-bfbc-4a7c-9cb6-208dc6c5cc00
SCIP notification number (Czech Republic)	3c8d3c5e-40a5-41de-bca2-82063b49ac90
SCIP notification number (Denmark)	d1ff37a0-5f9e-43c8-89cf-4741f68bd669
SCIP notification number (Finland)	f014e166-1de2-4d15-810d-859a19c204cf
SCIP notification number (France)	5d396077-7193-4880-9233-e313ed885557
SCIP notification number (Germany)	6bf45ab0-01f2-45fe-89a6-b0d51e85f5d2
SCIP notification number (Hungary)	2ea8fd5f-9f2e-47ec-a009-078e23ac58c5
SCIP notification number (Italy)	1508850c-28c7-480b-a973-85531cf7f42f
SCIP notification number (Netherlands)	292c190b-438e-48f0-88a0-468c8a99b356
SCIP notification number (Poland)	a495e960-8211-4e5f-b80b-032e4c9aeea0
SCIP notification number (Romania)	9ecb3549-8241-4a1f-80f4-73c06fff89d6
SCIP notification number (Sweden)	c214cf13-8b7f-4ee0-b8c3-630da051b185

Approvals / Certificates

General approvals



Approval	Standard	Certificate Name
CB DEKRA Certification B.V.	IEC 61984	NL-102427
CSA CSA Group	C22.2	2315087
KEMA/KEUR DEKRA Certification B.V.	EN 61984	71-126089

Downloads

Environmental Product Compliance

Compliance Search

Environmental Product Compliance 713-1415/117-000	↓
--	---

Documentation

Additional Information

Technical Section	03.04.2019	pdf 2027.26 KB	↓
		pdf 535.32 KB	↓

CAD/CAE-Data

CAD data

2D/3D Models
713-1415/117-000



CAE data

ZUKEN Portal
713-1415/117-000



PCB Design

Symbol and Footprint
via SamacSys
713-1415/117-000



Symbol and Footprint
via Ultra Librarian
713-1415/117-000



1 Compatible Products

1.1 System counterpart

1.1.1 Female connector/socket



Item No.: [713-1115/107-000](#)

1-conductor female connector, 2-row; CA-GE CLAMP®; 1.5 mm²; Pin spacing 3.5 mm; 30-pole; 100% protected against mismatching; Screw flange; black

1.2 Optional Accessories

1.2.1 Coding

1.2.1.1 Coding




Item No.: [714-101](#)

Coding key; orange

Installation Notes

Coding



Coding a male header by inserting a coding pin.