


RANA LED Recessed 600
RANA LED R 600 LO 3K LOUV+PRI 1-10 W GEN2
0052402



PRODUCT OVERVIEW

Product name	RANA LED R 600 LO 3K LOUV+PRI 1-10 W GEN2
Technology	LED
Cap/Base	N/A
Housing	Steel
Mount	Ceiling recessed mounting
E-number FI	4273752
Warranty	5 years
Fixture luminous flux (lm)	2800
Luminaire efficacy (lm/W)	100
Colour temperature (K)	3000
Light colour	Warm White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Glare control	< 19
Photobiological Risk Group	RG0
Total power consumption (W)	28
Electrical protection	Class I
Control gear type	LED driver constant current
Housing colour	White
IP rating	IP20
IK rating	IK07
Product EAN number	5410288524023

DATA TABLE

General data	
Product name	RANA LED R 600 LO 3K LOUV+PRI 1-10 W GEN2
Technology	LED
Cap/Base	N/A
Housing	Steel
Mount	Ceiling recessed mounting

RANA LED Recessed 600

RANA LED R 600 LO 3K LOUV+PRI 1-10 W GEN2

0052402

Performance ambient temperature Tq 25
(°C)

E-number FI 4273752

Warranty 5 years

Optical data

Fixture luminous flux (lm) 2800

Luminaire efficacy (lm/W) 100

Colour temperature (K) 3000

Light colour Warm White

CRI (Ra) 80

Colour Variation Initial (SDCM) SDCM3

Glare control < 19

Photobiological Risk Group RG0

Electrical data

Total power consumption (W) 28

Primary Supply/Product voltage - min (V) 220

Electrical protection Class I

Control gear type LED driver constant current

Drive current (mA) 275

Inrush Current (A) 45

Inrush Duration (µs) 100

Glow Wire Test (°C) 850

Energy Efficiency Class (A->G) of
contained light source C

Nominal Frequency (Hz) 50/60Hz

Max. products per 10A C Breaker 31

Max. products per 20A B Breaker 37

Connectable conductor cross section -
Min (mm²) 2.5

Connectable conductor cross section -
Max (mm²) 2.5

Lifetime data

Lifespan L70 B50 50000

Lifespan L70 B10 50000

Lifespan L80 B50 50000

Lifespan L80 B10 50000

Lifespan L90 B50 50000

Lifespan L90 B10 50000

Physical data

Housing colour White

IP rating IP20

IK rating IK07

Diffuser finish Prismatic

Diffuser material PC Polycarbonate

Nominal Product Length (mm) 595


Nominal Product Width (mm) 595

RANA LED Recessed 600
RANA LED R 600 LO 3K LOUV+PRI 1-10 W GEN2
0052402

Weight (kg)	4.6
Recessed Depth (mm)	120

Packaging	
Single packaging type	Carton
Product EAN number	5410288524023
Packaging single width (cm)	6.5
Packaging single depth (cm)	65.0
DUN14 (outer)	05410288524023
Packaging outer length / height (cm)	62.0

PHOTOMETRY

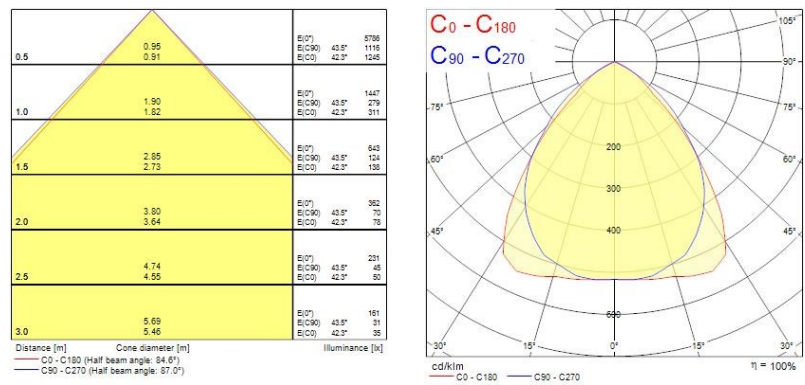

TECHNICAL DRAWINGS

