

RANA LED R 600 LO 3K LOUV+PRI 1-10 W GEN2  
0052402



Features

- Ceiling Recessed LED Linear luminaire (lay-in), with Louvre + Prismatic Optic, Direct Light Distribution, Luminaire Dimensions: 595x595x60mm, Sylvania White body colour, IP20, IK07, Light Engine Dimensions: 570x130mm, 1-10V Dimmable, Low LED flicker (+/-5%), Warm White (3000K) LED Colour Temperature, 2800lm, 28W, 100lm/W efficacy, CRI>80, 3 SDCM (3-step MacAdam ellipse) LED Colour Consistency, UGR<19, Luminance at 65° < 3000 cd/m2, Lumen Maintenance: L90B10 at 50,000 hours, Glow Wire Test 850°C, Quick and easy electrical connection with direct access to push-connectors on top, 2 x metallic safety cables (1.5m) included, the luminaire can be covered with building insulation of Glass Wool type.


Product Overview

|                                 |                                           |
|---------------------------------|-------------------------------------------|
| Product name                    | RANA LED R 600 LO 3K LOUV+PRI 1-10 W GEN2 |
| Technology                      | LED                                       |
| Cap/Base                        | N/A                                       |
| Housing                         | Steel                                     |
| Mount                           | Ceiling recessed mounting                 |
| E-number FI                     | 4273752                                   |
| Fixture luminous flux (lm)      | 2800                                      |
| Luminaire efficacy (lm/W)       | 100                                       |
| Colour temperature (K)          | 3000                                      |
| Light colour                    | Warm White                                |
| CRI (Ra)                        | 80                                        |
| Colour Variation Initial (SDCM) | 3                                         |
| Glare control                   | < 19                                      |
| Photobiological Risk Group      | RG0                                       |
| Total power consumption (W)     | 28                                        |
| Electrical protection           | Class I                                   |

## RANA LED R 600 LO 3K LOUV+PRI 1-10 W GEN2 0052402

|                    |                             |
|--------------------|-----------------------------|
| Control gear type  | LED driver constant current |
| Housing colour     | White                       |
| IP rating          | IP20                        |
| IK rating          | IK07                        |
| Product EAN number | 5410288524023               |
| Warranty           | 5 years                     |

### Photometry

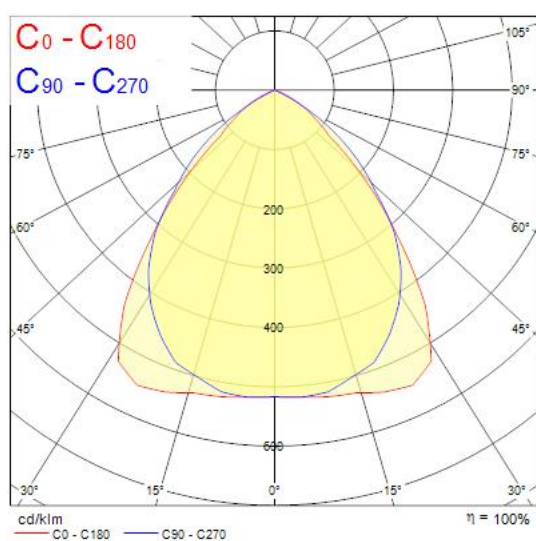

### Technical drawings

