

Features

• Raxa presents a refined solution for lighting needs, combining aesthetic finesse with functional excellence Raxa is a modular linear track system, easy and fast to install on 3-circuit tracks Specific track adaptor that guarantees a safe electrical connection Aluminum body with a slim profile, 32mm only, neat and seamless installation on OneTrack Wallwasher diffuser, asymmetric light beam angle:48° x 83° Textured black finishing colour. Light color temperature: 4000K, neutral white, Total system power: 22W, Fixture lumen output: 2200lm, efficacy: 100lm/W, Ra90 typical, LED chromacity: 3 step MacAdam ellipse (SDCM3), IR/UV free light source without heat radiation, low flicker, DALI dimmable driver Suitable for installation on 3-circuit tracks, please check compatibility list. Compatible with OneTrack, Lytespan Round, Lytespan H-Track. Electrical protection: Class I. Degree of protection: IP20, suitable for indoor environment only Nominal product dimensions: L.865mmx32mmx75mm


Product Overview

| | |
|-----------------------------------|--|
| Product name | RAXA WALLWASHER 900 CRI90 4000K DALI BLACK |
| Technology | LED |
| Cap/Base | N/A |
| Housing | Aluminium |
| Mount | Track mounting |
| General application | Museums & Galleries, Office, Retail |
| ETIM Class | EC001744 |
| Fixture luminous flux (lm) | 2200 |
| Luminaire efficacy (lm/W) | 100 |
| Correlated colour temperature (k) | 4000 |

RAXA WALLWASHER 900 CRI90 4000K DALI BLACK 2016460

| | |
|---------------------------------|-----------------------------|
| Light colour | Neutral White |
| CRI (Ra) | 90 |
| Colour Variation Initial (SDCM) | 3 |
| Beam Angle (°) | 48x83 |
| Glare control | < 24 |
| Photobiological Risk Group | RG0 |
| Total power consumption (W) | 22 |
| Electrical protection | Class I |
| Control gear type | LED driver constant current |
| Dimmable | Yes |
| Housing colour | Black |
| IP rating | IP20 |
| IK rating | IK02 |
| Product EAN number | 5025768164608 |
| Warranty | 5 years |
| Dimming method | DALI |
| Useful luminous flux (#use) | 2200 |

Photometry

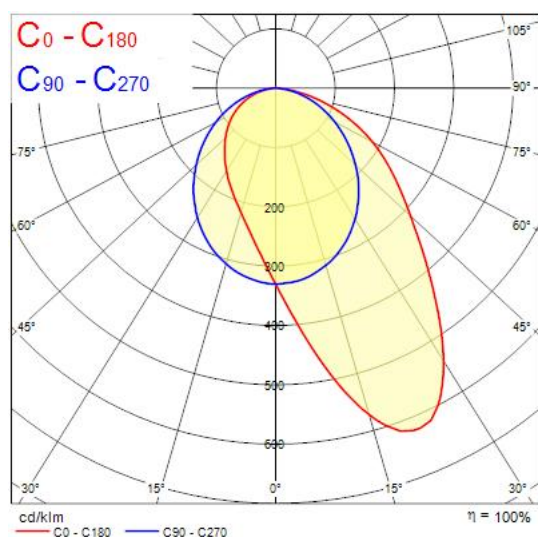

Technical drawings

