

Data Sheet | Item Number: 713-1431/117-000


THR male header, 2-row; 0.8 x 0.8 mm solder pin; angled; 100% protected against mismatching; Threaded flange; Pin spacing 3.5 mm; 22-pole; black

<https://www.wago.com/713-1431/117-000>



Color: ■ black

Similar to illustration

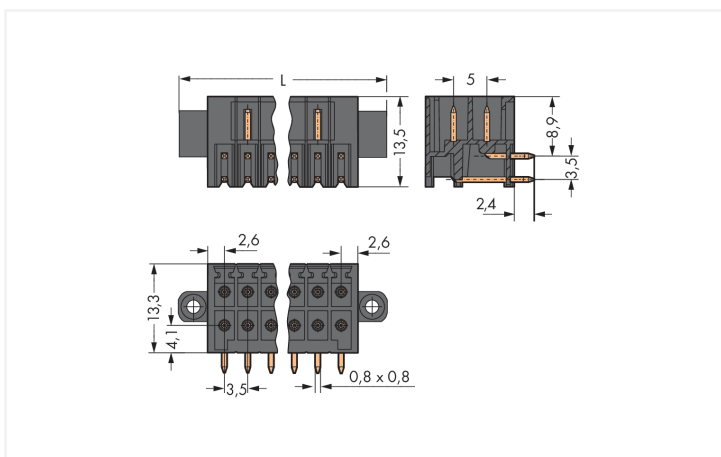

Dimensions in mm

$L = [(pole\ no./2) - 1] \times pin\ spacing + 13.6\ mm$



Male connector, 713 Series, solder pin dimensions 0.8 x 0.8 mm

Our male connector (item number 713-1431/117-000) simplifies electrical installations. Dimensions: (48.6 x 15.7 x 13.5) mm (width x height x depth).

The contact surface is coated with tin. The pcb connector is designed for THR soldering.

Notes

Safety Information

The MCS – MULTI CONNECTION SYSTEM includes connectors without breaking capacity in accordance with DIN EN 61984. When used as intended, these connectors must not be connected/disconnected when live or under load. When used as intended, these connectors must not be connected/disconnected when live or under load. The circuit design should ensure header pins, which can be touched, are not live when unmated.

Variants:

Other pole numbers
Other solder pin lengths
Gold-plated or partially gold-plated contact surfaces
Other versions (or variants) can be requested from WAGO Sales or configured at <https://configurator.wago.com/>.

Electrical data

Ratings per	IEC/EN 60664-1			Approvals per	UL 1059		
Overvoltage category	III	III	II	Use group	B	C	D
Pollution degree	3	2	2	Rated voltage	150 V	50 V	-
Nominal voltage	80 V	160 V	250 V	Rated current	10 A	10 A	-
Rated impulse withstand voltage	2.5 kV	2.5 kV	2.5 kV				
Rated current	10 A	10 A	10 A				

Approvals per	CSA		
Use group	B	C	D
Rated voltage	150 V	-	-
Rated current	12 A	-	-

Connection Data

Total number of potentials	22	Connection 1	
Number of connection types	1	Pole number	22
Number of levels	2		

Physical data

Pin spacing	3.5 mm / 0.138 inches
Width	48.6 mm / 1.913 inches
Height	15.7 mm / 0.618 inches
Height from the surface	13.3 mm / 0.524 inches
Depth	13.5 mm / 0.531 inches
Solder pin length	2.4 mm
Solder pin dimensions	0.8 x 0.8 mm
Plated through-hole diameter (THR)	1.3 ^(+0.1) mm

Mechanical data

Variable coding	Yes
Anti-rotation protection	Yes

Plug-in connection

Contact type (pluggable connector)	Male connector/plug
Connector (connection type)	for PCB
Mismating protection	Yes
Mating direction to the PCB	0°
Locking of plug-in connection	Threaded flange

PCB contact

PCB contact	THR
Solder pin arrangement	over the entire male connector (in-line)
Number of solder pins per potential	1

Material data

Note (material data)	Information on material specifications can be found here
Color	black
Material group	I
Insulation material (main housing)	Polyphthalamide (PPA GF)
Flammability class per UL94	V0
Contact material	Electrolytic copper (E _{Cu})
Contact Plating	Tin
Fire load	0.125 MJ
Weight	7.1 g
MSL per J-STD 020D	1

Environmental requirements

Limit temperature range	-60 ... +100 °C
Processing temperature	-35 ... +60 °C

Commercial data

Product Group	3 (Multi Conn. System)
PU (SPU)	20 pcs
Packaging type	Box
Country of origin	PL
GTIN	4050821156642
Customs tariff number	85366930000

Product Classification

UNSPSC	39121409
eCl@ss 10.0	27-44-04-02
eCl@ss 9.0	27-44-04-02
ETIM 9.0	EC002637
ETIM 10.0	EC002637
ECCN	NO US CLASSIFICATION

Environmental Product Compliance

RoHS Compliance Status	Compliant,With Exemption
RoHS Exemption	6(c)
SCIP notification number (Austria)	497af0e1-a5dd-4799-a323-927e70e4ce84
SCIP notification number (Belgium)	a51831f5-c954-4cc9-a6b6-bb16c91a4ee9
SCIP notification number (Bulgaria)	4c92f5fb-7d83-4f57-857e-8773f52750c9
SCIP notification number (Czech Republic)	0a5d718c-532d-4a3f-b85a-3c5617dd4223
SCIP notification number (Denmark)	62d45462-6ea4-4034-a7da-5c4419d82bd1
SCIP notification number (Finland)	0bcf1285-4e06-419a-a7f7-9e2c002aca7c
SCIP notification number (France)	6e5ef887-4e6f-4356-a9d1-1c20ceb19fb7
SCIP notification number (Germany)	5df4c0c6-55dd-4e51-8aef-54a3a2d4590a
SCIP notification number (Hungary)	b83df5d1-0448-443a-a7d3-d6ade4489857
SCIP notification number (Italy)	6dcf563d-877a-4996-b31b-05e60790a2a6
SCIP notification number (Netherlands)	3e6afc16-7255-4871-b2a8-2093f7b8e5a7
SCIP notification number (Poland)	97a86a3a-da0e-4e24-a6c8-d0f40cd51a0c
SCIP notification number (Romania)	bfgcd9952-e324-447e-9186-44f998857cae
SCIP notification number (Sweden)	e0b7e39b-5f82-4dd3-b397-a4bf9d87f12b

Approvals / Certificates

General approvals



Approval	Standard	Certificate Name
CB DEKRA Certification B.V.	IEC 61984	NL-102427
CSA CSA Group	C22.2	2315087
KEMA/KEUR DEKRA Certification B.V.	EN 61984	71-133740

Downloads

Environmental Product Compliance

Compliance Search	
Environmental Product Compliance 713-1431/117-000	↓

Documentation

Additional Information			
Technical Section	03.04.2019	pdf 2027.26 KB	↓
		pdf 535.32 KB	↓

CAD/CAE-Data

CAD data

2D/3D Models
713-1431/117-000



CAE data

ZUKEN Portal
713-1431/117-000



PCB Design

Symbol and Footprint
via SamacSys
713-1431/117-000



Symbol and Footprint
via Ultra Librarian
713-1431/117-000



1 Compatible Products

1.1 System counterpart

1.1.1 Female connector/socket



Item No.: [713-1111/107-000](#)

1-conductor female connector, 2-row; CA-GE CLAMP®; 1.5 mm²; Pin spacing 3.5 mm; 22-pole; 100% protected against mismatching; Screw flange; black

1.2 Optional Accessories

1.2.1 Coding

1.2.1.1 Coding




Item No.: [714-101](#)

Coding key; orange

Installation Notes

Coding



Coding a male header by inserting a coding pin.