

36 501 710 Product version up to 6/30/2020



- cover plate 120 x 120 mm
- temperature control handle with safety limit stop at 38°C
- thermostat cartridge
- WRAS



Chrome

36 501 710-00



Brushed Platinum

36 501 710-06

Required miscellaneous

xGRID Installation track 555 mm - 12 360 970 90



Recommended miscellaneous

xGRID Attachment set for integrating in the dry wall construction - 12 340 970 90



Required miscellaneous


xTOOL Concealed thermostat module without volume control - 35 503 970 90




- min. recess depth 85 mm
- max. recess depth 110 mm

36 501 710 Product version up to 6/30/2020

mm [inches]

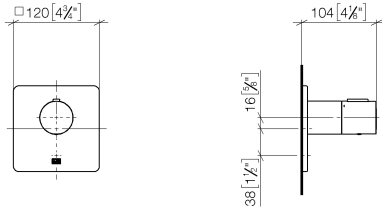

Flow rate chart

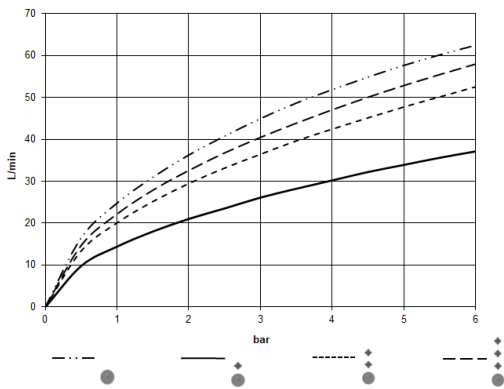

Codes & Standards

DIN 4109

EN 1111

ISO 3822

Scottish Water
Byelaws

UK Water Supply
Regulations

Ü-Zeichen



LULU xTOOL Concealed thermostat without volume control 1/2" - Chrome

LULU

36 501 710 Product version up to 6/30/2020

Certificates and sustainability

WRAS_2011

DVGW_DW-
6512DN0

LGA_29


LGA_29

LGA_29

EPD-DOR-20230287

-IBA1-EN

Environmental.prod
uct-declarat

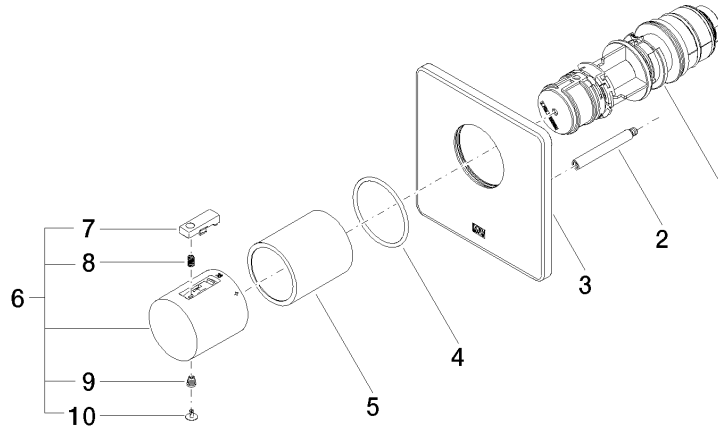

Spare parts list

No.	Item Number	Name	Quantity used	Delivery time
3	09 11 02 329-00	xTOOL Rosette DB logo 120 x 120 x 9 mm - Chrome	1.00	20
10	90 31 20 049 00-00	Plug - Chrome	1.00	20
1	90 15 02 065 00 90	Thermostat cartridge with control unit Ø 44 x 147 mm -	1.00	14
9	90 30 30 136 00 90	Bolt -	1.00	14
8	90 16 02 027 00 90	Spring Ø 4,5 x 7,5 mm -	1.00	14
7	90 21 33 011 00-13	Repair kit for thermostat handle - black	1.00	14
4	90 14 10 049 00 90	O-Ring 45,69 x 2,62 mm -	1.00	14
6	90 17 33 004 00-00	Handle for thermostat Ø 46 x 48 mm - Chrome	1.00	-
Spare part can no longer be ordered, please order the replacement item				
	90173302000-00	Handle for thermostat Ø 46 x 48 mm - Chrome		
5	90 21 02 112 00-00	Sleeve - Chrome	1.00	20
2	90 31 09 095 00 90	Rod -	1.00	14