


Walraven WDI1L Drop-in Anchor Lipped

(L0310)

standard drop-in anchor with a lip collar

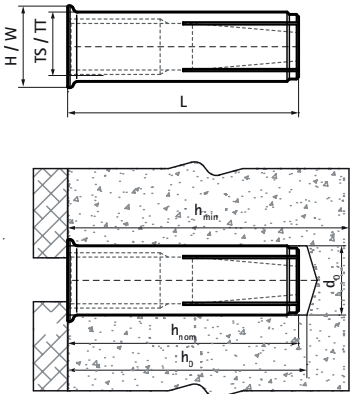

Features & benefits

- simple and quick installation procedure
- collar with a lip for flush anchor setting at any hole depth
- medium load capacity
- ETA ETAG001 Part 6 approval for multiple use for non-structural applications
- fire resistance class R30-R120 for design of anchorages under exposure to fire (M8-M16)
- complies with VdS CEA 4001:2024-01 (08) for applications with sprinkler systems in concrete (M8-M12)
- for loads and more information, refer to the product data sheet and/or the ETA report
- substrate type: cracked concrete, non-cracked concrete
- material: steel
- zinc plated



Product Number	Thread Size	Thread Type	Total Width x Total Height x Total Length	Drill Hole Diameter	Min. Drill Hole Depth	Standard Embedment Depth	Minimum Substrate Thickness
Reference letter	TS	TT	W x H x L	d0	h0 min	hnom	hmin
Unit description			mm x mm x mm	mm	mm	mm	mm
6103106	M6	Metric	8 x 8 x 25	8	30	≥ 25	80
6103108	M8	Metric	10 x 10 x 30	10	32	≥ 30	80
6103110	M10	Metric	12 x 12 x 40	12	42	≥ 40	80
6103112	M12	Metric	15 x 15 x 50	15	53	≥ 50	100
6103116	M16	Metric	20 x 20 x 65	20	70	≥ 65	130