


Walraven Threaded Rod (BUP1000)

(K5508)

for threaded connections, hangers and ties,

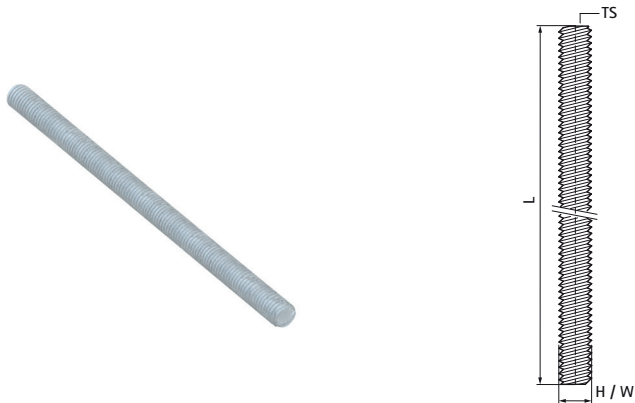

Features & benefits

- according to DIN 976-1
- material: steel, strength class 4.8
- product is part of the Walraven UltraProtect® 1000 system
- suitable for in- and outdoor applications
- stands min. 1,000 hours salt spray test (max. 5% red rust) according to ISO 9227
- thread with 60° angle provides best performance
- M10 and M12 tested for fire safety according to EN 1363-1

Product Number	Norm / Standard	Thread Size	Total Height	Total Width	Total Length
<i>Reference letter</i>		<i>TS</i>	<i>H</i>	<i>W</i>	<i>L</i>
<i>Unit description</i>			<i>mm</i>	<i>mm</i>	<i>mm</i>
63081008	DIN 976-1	M8	8	8	1,000
63082008	DIN 976-1	M8	8	8	2,000
63081010	DIN 976-1	M10	10	10	1,000
63082010	DIN 976-1	M10	10	10	2,000
63081012	DIN 976-1	M12	12	12	1,000
63082012	DIN 976-1	M12	12	12	2,000
63081016	DIN 976-1	M16	16	16	1,000
63082016	DIN 976-1	M16	16	16	2,000