


Walraven Threaded Rod

(K5510)

for threaded connections, hangers and ties,

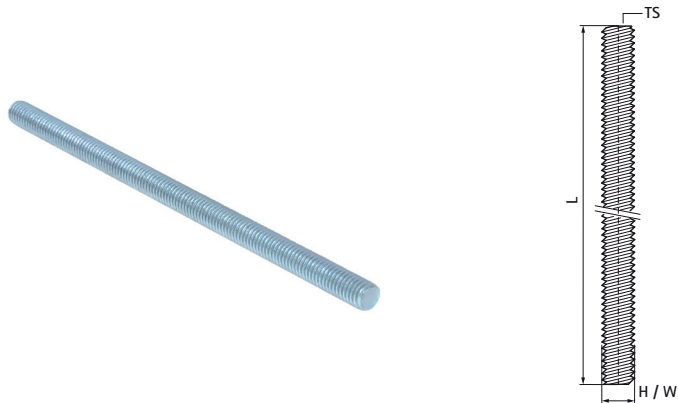

Features & benefits

- according to DIN 976-1
- material: steel, strength class 4.8
- zinc plated
- thread with 60° angle provides best performance
- M10 and M12 tested for fire safety according to EN 1363-1
- M7B: pitch = M7 x 1 mm
- M7F: pitch = M7 x 1.5 mm

Product Number	Norm / Standard	Thread Size	Total Height	Total Width	Total Length
Reference letter		TS	H	W	L
Unit description			mm	mm	mm
6303006	DIN 976-1	M6	6	6	1,000
6303206	DIN 976-1	M6	6	6	2,000
6303306	DIN 976-1	M6	6	6	3,000
6303007	DIN 976-1	M7x1.0	7	7	1,000
6303007F	DIN 976-1	M7x1.5	7	7	1,000
6303008	DIN 976-1	M8	8	8	1,000
6303208	DIN 976-1	M8	8	8	2,000
6303308	DIN 976-1	M8	8	8	3,000
6303010	DIN 976-1	M10	10	10	1,000
6303210	DIN 976-1	M10	10	10	2,000
6303310	DIN 976-1	M10	10	10	3,000
6303012	DIN 976-1	M12	12	12	1,000
6303212	DIN 976-1	M12	12	12	2,000
6303312	DIN 976-1	M12	12	12	1,000
6303014	DIN 976-1	M14	14	14	1,000
6303016	DIN 976-1	M16	16	16	1,000
6303216	DIN 976-1	M16	16	16	2,000
6303316	DIN 976-1	M16	16	16	3,000
6303020	DIN 976-1	M20	20	20	1,000
6303024	DIN 976-1	M24	24	24	1,000