



Features

• Raxa presents a refined solution for lighting needs, combining aesthetic finesse with functional excellence Raxa is a modular linear track system, easy and fast to install on 3-circuit tracks Specific track adaptor that guarantees a safe electrical connection Aluminum body with a slim profile, 32mm only, neat and seamless installation on OneTrack UGR19 lenses, light beam angle:68° Textured black finishing colour. Light color temperature: 4000K, neutral white, Total system power: 10.6W, Fixture lumen output: 840lm, efficacy: 79lm/W, Ra90 typical, LED chromacity: 3 step MacAdam ellipse (SDCM3), IR/UV free light source without heat radiation, low flicker, non-dimmable driver Suitable for installation on 3-circuit tracks, please check compatibility list. Compatible with OneTrack, Lytespan Round, Lytespan H-Track. Electrical protection: Class I. Degree of protection: IP20, suitable for indoor environment only Nominal product dimensions: L.585mmx32mmx75mm


Product Overview

| | |
|-----------------------------------|-------------------------------------|
| Product name | RAXA UGR19 600 CRI95 4000K BLACK |
| Technology | LED |
| Cap/Base | N/A |
| Housing | Aluminium |
| Mount | Track mounting |
| General application | Museums & Galleries, Office, Retail |
| ETIM Class | EC001744 |
| Fixture luminous flux (lm) | 840 |
| Luminaire efficacy (lm/W) | 79 |
| Correlated colour temperature (k) | 4000 |
| Light colour | Neutral White |

RAXA UGR19 600 CRI95 4000K BLACK 2016471

| | |
|---------------------------------|-----------------------------|
| CRI (Ra) | 95 |
| Colour Variation Initial (SDCM) | 3 |
| Beam Angle (°) | 68 |
| Glare control | < 19 |
| Photobiological Risk Group | RG0 |
| Total power consumption (W) | 10.6 |
| Electrical protection | Class I |
| Control gear type | LED driver constant current |
| Dimmable | No |
| Housing colour | Black |
| IP rating | IP20 |
| IK rating | IK02 |
| Product EAN number | 5025768164714 |
| Warranty | 5 years |
| Dimming method | N/A |
| Useful luminous flux (#use) | 840 |

Photometry

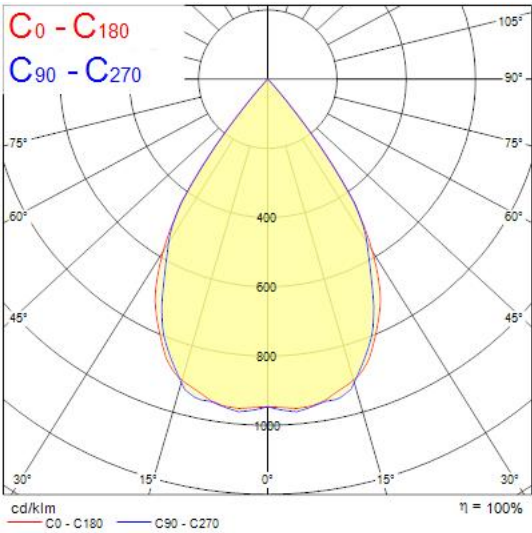

Technical drawings

