


## Data Sheet | Item Number: 753-150

### 753 Series coding elements

<https://www.wago.com/753-150>

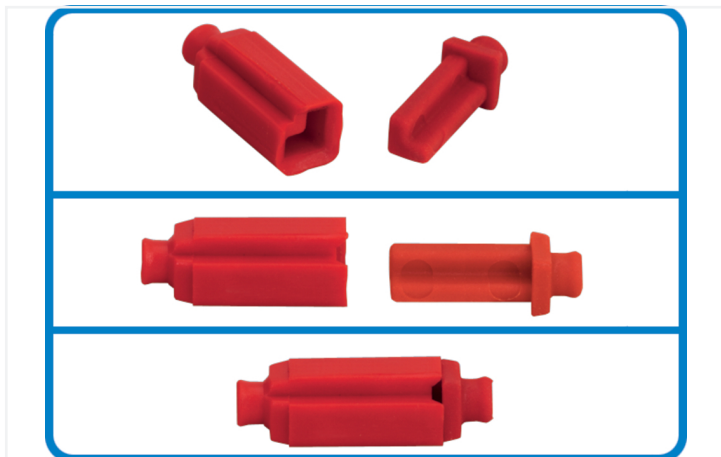

Color: ■ red

#### Mechanical data

Pluggable connector pluggable

#### Material data

Color red  
Fire load 0.003 MJ  
Weight 0.1 g

#### Environmental requirements

Ambient temperature (operation) 0 ... +55 °C  
Ambient temperature (storage) -40 ... +85 °C  
Protection type IP20  
Pollution degree 2 per IEC 61131-2  
Operating altitude 0 ... 2000 m / 0 ... 6562 ft  
Relative humidity (without condensation) 95 %  
Vibration resistance 4g per IEC 60068-2-6  
Shock resistance 15g per IEC 60068-2-27  
Exposure to pollutants per IEC 60068-2-42 and IEC 60068-2-43  
Permissible H<sub>2</sub>S contaminant concentration at a relative humidity 75 % 10 ppm  
Permissible SO<sub>2</sub> contaminant concentration at a relative humidity 75 % 25 ppm

#### Commercial data

Product Group 15 (I/O System)  
PU (SPU) 100 pcs  
Packaging type Box  
Country of origin DE  
GTIN 4044918924856  
Customs tariff number 39269097900

Product Classification	
UNSPSC	39121708
eCl@ss 10.0	27-24-26-92
eCl@ss 9.0	27-24-26-92
ETIM 9.0	EC002584
ETIM 8.0	EC002584
ECCN	NO US CLASSIFICATION

Environmental Product Compliance	
RoHS Compliance Status	Compliant, No Exemption

### Downloads

#### Environmental Product Compliance

Compliance Search

Environmental Product Compliance 753-150	<a href="#">↓</a>
--	-------------------

### Documentation

#### Bid Text

753-150	19.02.2019	xml 2.48 KB	<a href="#">↓</a>
753-150	09.01.2019	docx 12.99 KB	<a href="#">↓</a>

### CAD/CAE-Data

#### CAE data

EPLAN Data Portal 753-150	<a href="#">↓</a>
WSCAD Universe 753-150	<a href="#">↓</a>

Subject to changes. Please also observe the further product documentation!

Current addresses can be found at: [www.wago.com](https://www.wago.com)