


# Concord

## DOMINO 5xLED 930 BLACK MB TRIM BLACK DALI 2061423



### Features

- Modular LED recessed linear spotlight, ideal for retail and hospitality applications. Die-cast aluminium body, passive cooling. Two levels of reflector installation, low glaring UGR<16. 5x LED source, 30° beam angle, optics: PMMA lens and polycarbonate reflector combination, Black matt reflector finish. Light color temperature: 3000K warm white, total system power: 13W, total fixture lumen output: 750lm, efficacy: 58 lm/W, Ra90 typical, LED chromacity: 3 step MacAdam ellipse (SDCM3), lifespan: 96,000 hours at 90% of the original output (L90B10), IR/UV free light source without heat radiation, operating voltage: 220-240V / 50-60Hz, electronic driver, ultra low flicker, DALI, electrical protection: Class II. Degree of Protection: IP40/IP20, suitable for indoor environment only.

### Product Overview


Product name	DOMINO 5xLED 930 BLACK MB TRIM BLACK DALI
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Ceiling recessed mounting
Fixture rating	Enclosed
Fixture luminous flux (lm)	750
Luminaire efficacy (lm/W)	58
LOR (%)	100
Colour temperature (K)	3000
Light colour	Warm White
CRI (Ra)	90
Colour Variation Initial (SDCM)	3
Glare control	< 16
Photobiological Risk Group	RG1
Total power consumption (W)	13

# Concord

## DOMINO 5xLED 930 BLACK MB TRIM BLACK DALI 2061423

Electrical protection	Class II
Control gear type	LED driver constant current
Control gear mounting	Remote
LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL 9005 - Jet black
IP rating	IP40/20
IK rating	IK03
Product EAN number	5025768614233
Warranty	5 years
Colour Code	930

### Photometry

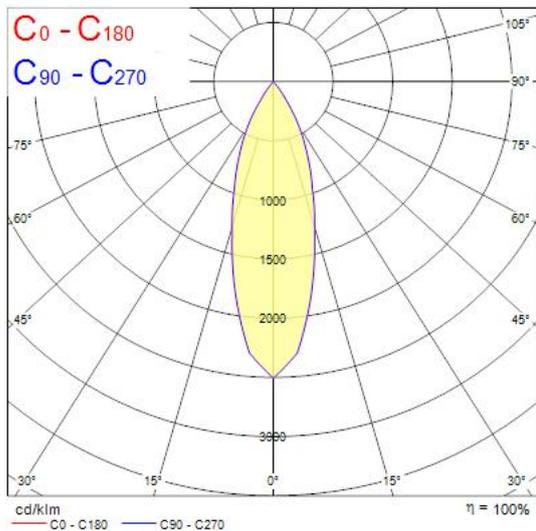

### Technical drawings

