

Features

- Resisto, integrated LED weatherproof luminaire, with UV stabilized flat diffuser designed to achieve uniform lit appearance, optimise light output and to reduce glare. 301 stainless steel diffuser clips and fixing brackets for surface mounting. Polycarbonate housing and diffuser - no yellow discolouration over time. 5050lm; 36W; 140lm/W; 4000K; SDCM<5; non dimmable; CRI80; IP66; IK08; Class I; 69,000hrs (L80B20) lifespan; 1200mm x 89mm x 88mm; D-mark; microwave motion sensor corridor function with infinite stand-by time and 10% stand-by level.


Product Overview

| | |
|--|---|
| Product name | RESISTO 1200 IP66 MWCORINF 5000LM 840 |
| Technology | LED |
| Cap/Base | PGZ12 |
| Housing | PC Polycarbonate |
| Mount | Ceiling recessed mounting, Wall surface mounted |
| General application | Logistics & Industry |
| ETIM Class | EC002892 |
| Fixture luminous flux (lm) | 5050 |
| Luminaire efficacy (lm/W) | 140 |
| Correlated colour temperature (k) | 4000 |
| Light colour | Neutral White |
| CRI (Ra) | 80 |
| Colour Consistency (SDCM) | 5 |
| Colour Variation Initial (SDCM) | 5 |
| Beam Angle (°) | 110 |
| Glare control | < 24 |
| Photobiological Risk Group | RG1 |
| Total power consumption (W) | 36 |

RESISTO 1200 IP66 MWCORINF 5000LM 840 0010323

| | |
|-----------------------------|-----------------------------|
| Electrical protection | Class I |
| Control gear type | LED driver constant current |
| Dimmable | Yes |
| Minimum dimming level (%) | 10 |
| LED Flickering Rate | Ultra low (5% or less) |
| Housing colour | Grey |
| IP rating | IP66 |
| IK rating | IK08 |
| Product EAN number | 5410288103235 |
| Warranty | 5 years |
| Dimming method | Other |
| Useful luminous flux (#use) | 5050 |

Photometry

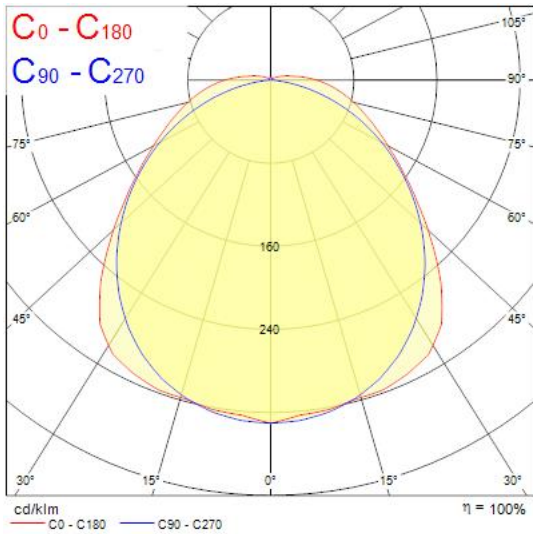

Technical drawings

