


RANA LED Recessed 1200
RANA LED R 1200 LO 3K LOUV+PRI DALI W GEN2
0052423

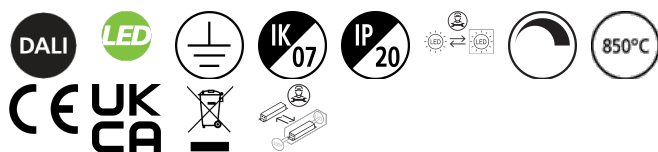

PRODUCT OVERVIEW

Product name	RANA LED R 1200 LO 3K LOUV+PRI DALI W GEN2
Technology	LED
Cap/Base	N/A
Housing	Steel
Mount	Ceiling recessed mounting
E-number FI	4273785
Warranty	5 years
Fixture luminous flux (lm)	2900
Luminaire efficacy (lm/W)	104
Colour temperature (K)	3000
Light colour	Warm White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Glare control	< 19
Photobiological Risk Group	RG0
Total power consumption (W)	28
Electrical protection	Class I
Control gear type	Electronic ballast
Housing colour	White
IP rating	IP20
IK rating	IK07
Product EAN number	5410288524238

DATA TABLE

General data	
Product name	RANA LED R 1200 LO 3K LOUV+PRI DALI W GEN2
Technology	LED
Cap/Base	N/A
Housing	Steel
Mount	Ceiling recessed mounting

RANA LED Recessed 1200

RANA LED R 1200 LO 3K LOUV+PRI DALI W GEN2

0052423

Performance ambient temperature Tq (°C) 25

E-number FI 4273785

Warranty 5 years

Optical data

Fixture luminous flux (lm) 2900

Luminaire efficacy (lm/W) 104

Colour temperature (K) 3000

Light colour Warm White

CRI (Ra) 80

Colour Variation Initial (SDCM) SDCM3

Glare control < 19

Photobiological Risk Group RG0

Electrical data

Total power consumption (W) 28

Primary Supply/Product voltage - min (V) 220

Lamp power factor 0.98

Electrical protection Class I

Control gear type Electronic ballast

Drive current (mA) 275

Inrush Current (A) 29

Inrush Duration (µs) 180

Glow Wire Test (°C) 850

Energy Efficiency Class (A->G) of contained light source C

Nominal Frequency (Hz) 50/60Hz

Max. products per 10A C Breaker 21

Max. products per 20A B Breaker 27

Connectable conductor cross section - Min (mm²) 2.5

Connectable conductor cross section - Max (mm²) 2.5

Lifetime data

Lifespan L70 B50 50000

Lifespan L70 B10 50000

Lifespan L80 B50 50000

Lifespan L80 B10 50000

Lifespan L90 B50 50000

Lifespan L90 B10 50000

Physical data

Housing colour White

IP rating IP20

IK rating IK07

Diffuser finish Prismatic

Diffuser material PC Polycarbonate

Nominal Product Length (mm) 1196


RANA LED Recessed 1200
RANA LED R 1200 LO 3K LOUV+PRI DALI W GEN2
0052423

Nominal Product Width (mm)	296
Weight (kg)	5.6
Recessed Depth (mm)	120

Packaging

Single packaging type	Carton
Product EAN number	5410288524238
Packaging single width (cm)	6.5
Packaging single depth (cm)	32.0
DUN14 (outer)	05410288524238
Packaging outer length / height (cm)	124.5

PHOTOMETRY

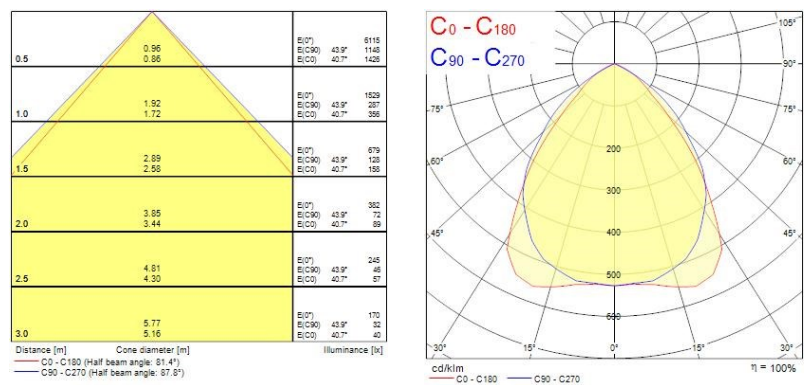

TECHNICAL DRAWINGS

