



# ENERG

енергия · ενεργεια



10066342

alpha innotec

WZS 102H3M



**44** dB

- dB



- 9 kW
- 10kW**
- 10 kW




# ENERGY

10066342

alpha innotec

WZS 102H3M

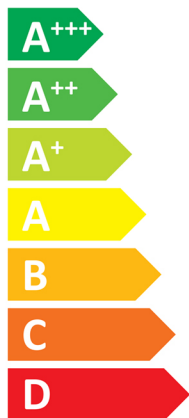

Two icons showing sound power level: a speaker inside a house with the text "44 dB" below it, and a speaker outside a house with the text "-" dB below it. In the background, a map of Europe is shown with various shades of blue.

A legend for power consumption with three colored squares: dark blue for "9 kW", medium blue for "10kW", and light blue for "10 kW".

An icon showing a clock face with a dashed line and a coin with an arrow pointing to it, symbolizing energy saving or cost reduction.



# ENERG

енергия · ενεργεια

Y

IJA

IE

IA

10066342

alpha innotec

WZS 102H3M + Luxtronik 2.1

Energy label for heating system components. It features a radiator icon with an **A<sup>++</sup>** rating, a boiler icon with an **A** rating, and a tap icon with an **XL** label.

Energy scale and radiator icon. The scale shows ratings from **A<sup>+++</sup>** (green) to **G** (red). A radiator icon is shown at the top, and a large **A<sup>++</sup>** rating arrow is on the right.

Energy label for additional features. It lists four features with their respective status boxes:
 

- Solar panel:
- Water tank:
- Control panel:
- Boiler:

Energy scale and tap icon. The scale shows ratings from **A<sup>+++</sup>** (green) to **G** (red). A tap icon with an **XL** label is shown at the top, and a large **A** rating arrow is on the right.

package (heat pumps and combination heater with heat pump) WZS 102H3M + Luxtronik 2.1

Seasonal space heating energy efficiency of heat pump ( $\eta_s$ )

① 143 %

**Rated heat output of the heat pump ( $P_{rated}$  kW)**

10

Temperature control

Class

VII (Table 1)

+

② 3,5 %

Supplementary boiler

package with hot water storage tank

no

$P_{sup}$  kW (rated heat output of supplementary heater)

$\eta_s$  % ( $\sigma_{\pi}$ )

$(\eta_s \% (sup) - ①) \times (\alpha_{WP}) = -$  ③ %

( $\alpha_{WE}$ : see Table 3)

( $\alpha_{WE}$ )

solar contribution

( $A_{Koll}$  m<sup>2</sup>)

( $\eta_{Koll}$  %)

( $V_{Sp}$  m<sup>3</sup>)

(standstill heat loss of the hot water storage tank in W)

( $\eta_{Sp}$ : Table 2)


$((294/P_{rated} \times 11) \times (A_{Koll} \text{ m}^2) + (115/P_{rated} \times 11) \times (V_{Sp} \text{ m}^3)) \times 0,45 \times ((\eta_{Koll} \%)/100) \times (\eta_{Sp}) = +$  ④ %

Seasonal space heating energy efficiency of package

⑤ 146 %

rounded to the nearest integer

Seasonal space heating energy efficiency class of package

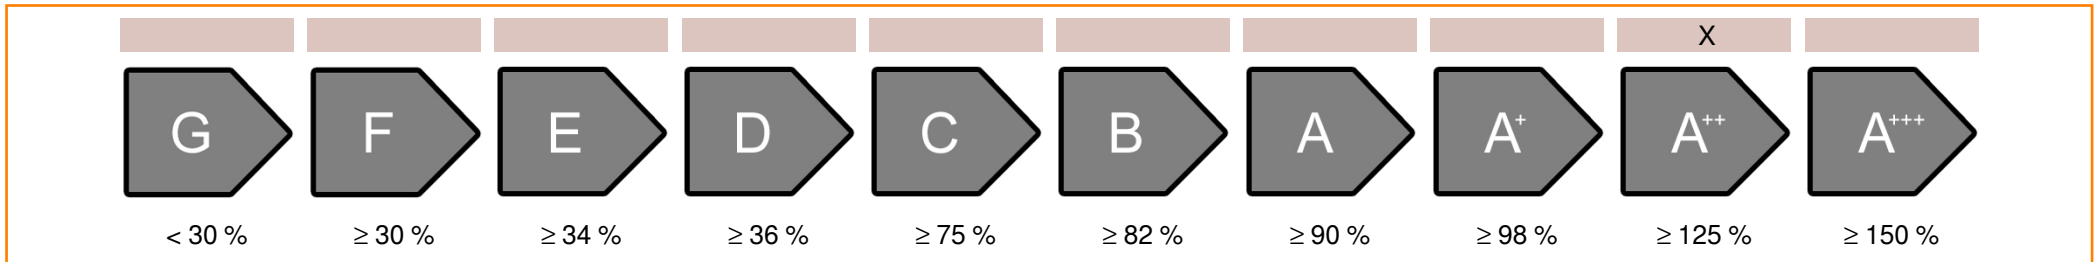

Seasonal space heating energy efficiency under colder or warmer climate conditions

**Seasonal space heating energy efficiency of the heat pump ( $\eta_s$ ) under colder climate conditions**

148 %

**Seasonal space heating energy efficiency of the heat pump ( $\eta_s$ ) under warmer climate conditions**

143 %

colder ⑤ 146 -V -6 = 152 warmer ⑤ 146 +VI 1 = 147

<b>heatpump datasheet:</b>			
<b>manufacturer:</b>			
		alpha innotec	
<b>model:</b>			
		WZS 102H3M	
<b>Information concerning energy efficiency class and rated heat output:</b>			
load profile water heating	XL		-
	average / low	average / medium	
energy efficiency class space heater:	A+++	A++	-
energy efficiency class waterheating	A		-
rated heat output:	11	10	kW
annual final energy consumption space heater	3934	5241	kWh
annual electricity consumption waterheating	1551		kWh
energy efficiency space heater:	214	143	%
energy efficiency waterheating	108		%
sound power level indoors	44		dB
<b>special precautions concerning assembly, installation or maintenance</b>			
All instructional work in this manual may only be carried out by qualified specialist personnel in compliance with local regulations.			
<b>additional information</b>			
	low	medium	
rated heat output colder climate	11	9	kW
rated heat output warmer climate	11	10	kW
annual energy consumption space heater colder climate	4478	5980	kWh
annual energy consumption space heater warmer climate	2619	3497	kWh
ann. Electricity consumption waterheating colder climate	1551		kWh
ann. Electricity consumption waterheating warmer climate	1551		kWh
energy efficiency space heater colder climate	223	148	%
energy efficiency space heater warmer climate	215	143	%
energy efficiency waterheating colder climate	108		%
energy efficiency DHWarmer climate	108		%
sound power level outdoors	-		dB

<b>technical data of the temperature controller</b>		
<b>manufacturer:</b>	<b>alpha innotec</b>	
<b>model:</b>	<b>Luxtronik 2.1</b>	
controller class	VII	-
contribution of the controller to the energy efficiency space heater	3,5	%

<b>Model</b>				<b>WZS 102H3M</b>			
Air-to-water heat pump: (yes/no)				no			
Brine-to-water heat pump: (yes/no)				yes			
Water-to-water heat pump: (yes/no)				no			
Low-temperature heat pump: (yes/no)				no			
Equipped with supplementary heater: (yes/no)				yes			
combination heater with: (yes/no)				yes			
application: (low/medium)				medium			
climate: (colder/average/warmer)				average			
<b>Item</b>	<b>Symbol</b>	<b>Value</b>	<b>Unit</b>	<b>Item</b>	<b>Symbol</b>	<b>Value</b>	<b>Unit</b>
<b>Rated heat output</b>	Prated	10	kW	<b>Seasonal space heating energy efficiency</b>	$\eta_S$	142,7	%
<b>Declared coefficient of performance for part load at indoor temperature 20°C and outdoor temperature Tj</b>				<b>Declared coefficient of performance for part load at indoor temperature 20°C and outdoor temperature Tj</b>			
Tj = -7°C	Pdh	8,5	kW	Tj = -7°C	COPd	3,05	-
Tj = +2°C	Pdh	8,9	kW	Tj = +2°C	COPd	3,76	-
Tj = +7°C	Pdh	9,1	kW	Tj = +7°C	COPd	4,35	-
Tj = +12°C	Pdh	9,4	kW	Tj = +12°C	COPd	5,09	-
Tj = bivalent temperature	Pdh	8,5	kW	Tj = bivalent temperature	COPd	3,05	-
Tj = operation limit temperature	Pdh	8,3	kW	Tj = operation limit temperature	COPd	2,82	-
For air-to-water heat pumps: Tj = -15°C (if TOL < -20°C)	Pdh	-	kW	For air-to-water heat pumps: Tj = -15°C (if TOL < -20°C)	COPd	-	-
Bivalent temperature	T <sub>biv</sub>	-7	°C	For air-to-water heat pumps: Operation limit temperature	TOL	-10	°C
Cycling interval capacity for heating	P <sub>cyh</sub>	-	kW	Cycling interval efficiency	COP <sub>cyh</sub>	-	-
Degradation co-efficient (**)	Cdh	1,0	-	Heating water operating limit temperature	WTOL	60	°C
<b>Power consumption in modes other than active mode</b>				<b>Supplementary heater</b>			
Off mode	P <sub>OFF</sub>	0,015	kW	Rated heat output	P <sub>sup</sub>	1,3	kW
Thermostat-off mode	P <sub>TO</sub>	0,015	kW	Type of energy input	electrical		
Standby mode	P <sub>SB</sub>	0,015	kW				
Crankcase heater mode	P <sub>CK</sub>	-	kW				
<b>Other items</b>							
Capacity control	fixed			For air-to-water heat pumps: Rated air flow rate, outdoors	-	-	m <sup>3</sup> /h
sound power level, indoors/outdoors	L <sub>WA</sub>	44 / -	dB	For water-/brine-to-water heat pumps: Rated brine or water flow rate, outdoor heat exchanger	-	2	m <sup>3</sup> /h
Emissions of nitrogen oxides	NO <sub>x</sub>	-	mg/kWh				
<b>For heat pump combination heater:</b>							
Declared load profile	XL			Water heating energy efficiency	$\eta_{wh}$	108	%
Daily electricity consumption	Q <sub>elec</sub>	7,063	kWh	Daily fuel consumption	Q <sub>fuel</sub>	-	kWh
<b>Contact details</b>	ait deutschland GmbH Industriestr. 3 95359 Kasendorf Germany						
(*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).							
(**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.							

<b>Model</b>				<b>WZS 102H3M</b>			
Air-to-water heat pump: (yes/no)				no			
Brine-to-water heat pump: (yes/no)				yes			
Water-to-water heat pump: (yes/no)				no			
Low-temperature heat pump: (yes/no)				no			
Equipped with supplementary heater: (yes/no)				yes			
combination heater with: (yes/no)				yes			
application: (low/medium)				low			
climate: (colder/average/warmer)				average			
<b>Item</b>	<b>Symbol</b>	<b>Value</b>	<b>Unit</b>	<b>Item</b>	<b>Symbol</b>	<b>Value</b>	<b>Unit</b>
<b>Rated heat output</b>	Prated	11	kW	<b>Seasonal space heating energy efficiency</b>	$\eta_S$	214,2	%
<b>Declared coefficient of performance for part load at indoor temperature 20°C and outdoor temperature Tj</b>				<b>Declared coefficient of performance for part load at indoor temperature 20°C and outdoor temperature Tj</b>			
Tj = -7°C	Pdh	9,4	kW	Tj = -7°C	COPd	5,23	-
Tj = +2°C	Pdh	9,5	kW	Tj = +2°C	COPd	5,63	-
Tj = +7°C	Pdh	9,6	kW	Tj = +7°C	COPd	6,05	-
Tj = +12°C	Pdh	9,7	kW	Tj = +12°C	COPd	6,52	-
Tj = bivalent temperature	Pdh	9,4	kW	Tj = bivalent temperature	COPd	5,23	-
Tj = operation limit temperature	Pdh	9,3	kW	Tj = operation limit temperature	COPd	5,05	-
For air-to-water heat pumps: Tj = -15°C (if TOL < -20°C)	Pdh	-	kW	For air-to-water heat pumps: Tj = -15°C (if TOL < -20°C)	COPd	-	-
Bivalent temperature	T <sub>biv</sub>	-7	°C	For air-to-water heat pumps: Operation limit temperature	TOL	-10	°C
Cycling interval capacity for heating	P <sub>cyh</sub>	-	kW	Cycling interval efficiency	COP <sub>cyh</sub>	-	-
Degradation co-efficient (**)	Cdh	1,0	-	Heating water operating limit temperature	WTOL	60	°C
<b>Power consumption in modes other than active mode</b>				<b>Supplementary heater</b>			
Off mode	P <sub>OFF</sub>	0,015	kW	Rated heat output	P <sub>sup</sub>	1,3	kW
Thermostat-off mode	P <sub>TO</sub>	0,015	kW	Type of energy input	electrical		
Standby mode	P <sub>SB</sub>	0,015	kW				
Crankcase heater mode	P <sub>CK</sub>	-	kW				
<b>Other items</b>							
Capacity control	fixed			For air-to-water heat pumps: Rated air flow rate, outdoors	-	-	m <sup>3</sup> /h
sound power level, indoors/outdoors	L <sub>WA</sub>	44 / -	dB	For water-/brine-to-water heat pumps: Rated brine or water flow rate, outdoor heat exchanger	-	2	m <sup>3</sup> /h
Emissions of nitrogen oxides	NO <sub>x</sub>	-	mg/kWh				
<b>For heat pump combination heater:</b>							
Declared load profile	-			Water heating energy efficiency	$\eta_{wh}$	-	%
Daily electricity consumption	Q <sub>elec</sub>	-	kWh	Daily fuel consumption	Q <sub>fuel</sub>	-	kWh
<b>Contact details</b>	ait deutschland GmbH Industriestr. 3 95359 Kasendorf Germany						
(*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).							
(**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.							