


Walraven PushStrut Button

(H2905)

for easy installation of complex rail constructions

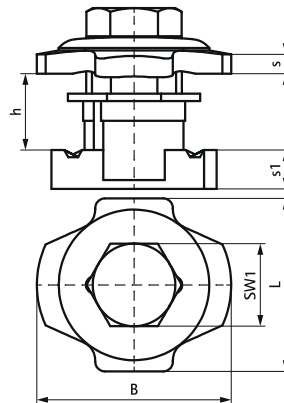

Features & benefits

- universal button: easily combined with all common Walraven RapidStrut® profiles and all Walraven PushStrut Connectors
- teeth with force fit connections offer more stability
- timesaving and flexible
- easy to remove and reusable
- 3D constructions due to 3D Connectors
- material: steel
- zinc plated
- The max. allowed load $F_{a,z}$ in the table refers to rails and cantilever arms with a material thickness of 2.5 mm.
- The $F_{a,z}$ at a thickness of 2.0 mm profile thickness = 4,500 N.
- The $F_{a,z}$ at a thickness of 1.5 mm profile thickness = 3,500 N.

Product Number	For Rail Type	Thread Size	Material Thickness	Maximum Allowed Load $F_{a,x}$	Maximum Allowed Load $F_{a,z}$	Total Width x Total Height x Total Depth
Reference letter		TS	MT	$F_{a,x}$	$F_{a,z}$	$W \times H \times D \times T$
Unit description			mm	N	N	mm x mm x mm
66519910	41x21, 41x41, 41x51, 41x62, 41x82	M10	8.00	3,000	5,000	35.6 x 37.72 x 40