



## PHOTOMETRIC LIGHT REPORT

# LED panel | butterfly | 60\*60 | 3-CCT | UGR19 | dim.

Article number: 174-275



Go to the  
webshop  
of Tronix  
Lighting



**TRONIX**



174-275 LED panel | butterfly | 60\*60 | 3-CCT | UGR19 | dim.

## Introduction

### Purpose of this Document

This document provides accurate and objective photometric data for Tronix Lighting item 174-275. All information is based on actual measurements taken from standard production units. No modifications were made to enhance performance results. In some cases, minor adjustments—such as temporary removal of covers, cables, or mounting features—were necessary for testing purposes. These did not influence product performance.

### Test Methodology

Testing was conducted using randomly selected, unopened samples from regular inventory. All tests comply with the LM-79-19 standard, the recognized method for photometric and electrical measurements of LED and OLED luminaires. This standard, an update of IES LM-79-2008, outlines environmental test conditions, stabilization procedures, measurement methods, and approved instruments. It uses absolute photometry, meaning results directly reflect the performance of the tested product, without comparison to rated lamp standards.

### Product 174-275 was tested using:

- A photogoniometer to measure luminous intensity distribution at various angles
- An integrating sphere to determine total luminous flux and colour characteristics

### Compliance & Certification

Item 174-275 meets the requirements of the following EU directives. Tronix Lighting certifies that all relevant tests were executed in accordance with the applicable standards, and the CE mark is applied accordingly:

- General Product Safety – Directive 2023/988/EC
- Low Voltage Directive (LVD) – Directive 2014/35/EU
- Electromagnetic Compatibility (EMC) – Directive 2004/108/EC
- Ecodesign – Directive 2009/125/EC
- RoHS 3 – Directive 2011/65/EU + Amendment 2015/863/EU

### Recycling & Sustainability

Tronix Lighting is affiliated with national recycling systems for electrical and electronic waste. The luminaire is over 90% recyclable when disposed of as electronic waste at end of life. In addition, Tronix Lighting participates in national packaging recycling schemes, ensuring full compliance with both the WEEE and packaging directives.



174-275 LED panel | butterfly | 60\*60 | 3-CCT | UGR19 | dim.

### Laboratory and equipment

Laboratory owner and location	Tronix Lighting BV. Uden. The Netherlands
Gonio spectrometer system and type	Viso Systems Type C. horizontal
Spectrometer manufacturer and model	(Gonio) Ocean Optics STS VIS (Sphere) Admesy HERA VIS 380-780nm
Flicker meter manufacturer and model	Viso Systems LabFlicker
Oscilloscope manufacturer and model	Tektronix MDO3024 oscilloscope (4 Channels. 200 MHz)
Power meter manufacturer and model	Vitretek PA900 Precision Multi-Channel Harmonic Power Analyzer
Power source manufacturer and model	(DC) Keithley Source Measure Unit SMU-2420 3A DC Source Meter (AC) Chroma 61601 AC Source
Datalogger Manufacturer and Model	Omega 8-Channel Thermocouple Thermometer/Data Logger

### Measurement conditions gonio spectrometer

Number of C-planes and Resolution	4 planes - 90°
γ (gamma)-Resolution	1°
Test Distance	1.81 m
Room Temperature and Humidity	22°C +/- 10% - RH 50% +/- 20%
Input Power. Power and Displacement Factors	33.8 W - PF 0.97 - DPF 0.98
Frequency of Input Power	50 Hz
Warm-up Time and Variation	Lamp stabilized in 15 min 2 sec --1.3%

### Tested light source

Manufacturer and Order Code	Tronix Lighting - 174-275
Product Description	LED panel   butterfly   60*60   3-CCT   UGR19   dim.

### Main Light Measurement Results

Output - Total Lumen (Up% / Down%)	3654 lm - 0.02% / 99.98%
Efficiency	108 lm/W
Energy efficiency class	F
Peak Intensity and Beam Angle	1550 cd - 94.3°
Correlated Colour Temperature	CCT = 4280 K
Colour Shift. CIE duv	Duv -0.0048
Colour Rendering Index	CRI 87.5
Colour Rendering TM30-18	R <sub>f</sub> 85.2 - R <sub>g</sub> 96.0
Television Lighting Consistency Index	TLCI = 76
Flicker	SVM 0.02 - PstLM 0.16



174-275 LED panel | butterfly | 60\*60 | 3-CCT | UGR19 | dim.


Electrical measurement details

**Input Power**

RMS Input voltage feed. $V_{RMS}$	232 V
RMS Input current feed. $I_{RMS}$	0.151 A
Total input power	33.8 W
Frequency of input power	50 Hz
Power factor	0.97
Displacement power factor	0.98
Total harmonic distortion of the current	14.57%
Total harmonic distortion of the voltage	2.85%

**Input Power Curve**

Voltage - Current

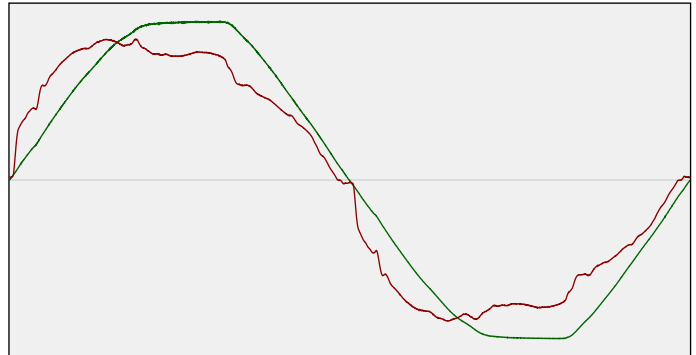

**Efficiency**

Radiated power efficiency: 34.2%




Lumen efficiency: 108 lm/W



**Harmonics**

3rd Harmonic	12.73%
5th Harmonic	5.4%
7th Harmonic	1.74%
9th Harmonic	2.16%
11th Harmonic	1.18%

**Current Harmonics %**

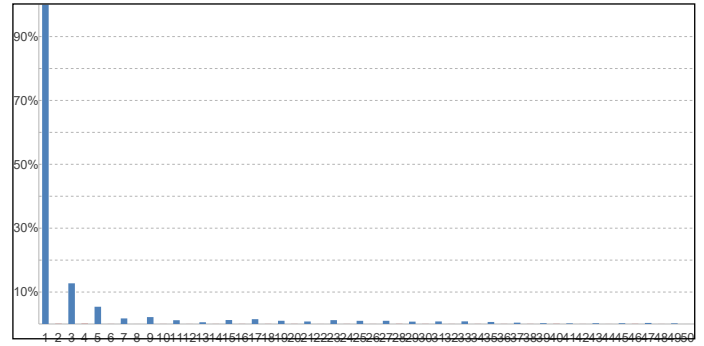

Stabilization Details

**Warm-up Conditions**

Stable period	15 min
Stable change max	2.0%
Minimum warm-up time	15 min

**Colour temperature change during warm-up**

CCT start	4276 K
CCT shift	+4 K
CCT end	4280 K

**Warm-up Results**

Total warmup time	Lamp stabilized in 15 min 2 sec
Warmup variation	-1.3%

**Output intensity change during warm-up**

Output start	3701 lm
Output change	-47 lm
Output end	3654 lm




174-275 LED panel | butterfly | 60\*60 | 3-CCT | UGR19 | dim.

## Colour measurement details



Total lumen output 3654 lm  
 Correlated Colour Temperature 4280 K  
 Colour coordinates CIE 1931 (x;y) = (0.367;0.358)  
 Colour deviation from BBL Duv = -0.0048

TM30-18 Colour Fidelity Index  $R_f$  85.2  
 TM30-18 Colour Gamut Index  $R_g$  96.0  
 Colour Rendering Index (Ra) CRI 87.5  
 Colour Rendering Index. (red component)  $R_9 = 28.1$


Colour Quality Scale CQS = 84.3  
 Television Lighting Consistency Index TLCI = 76

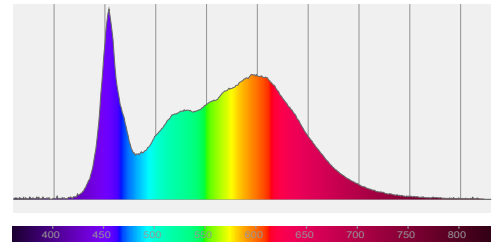

Relative spectral power distribution



## TM30 details

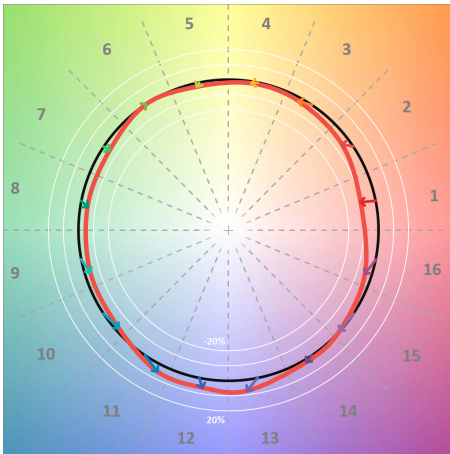


TM30 Colour vectors per hue bin




TM30 Colour distortion


Hue Bin	$R_f$	Shifts (%)	
		Chroma	Hue
C1	82	-10%	1%
C2	85	-6%	6%
C3	82	-3%	9%
C4	89	-1%	4%
C5	91	-2%	2%
C6	95	0%	-1%
C7	91	-5%	0%
C8	90	-5%	3%
C9	85	-4%	10%
C10	79	-3%	14%
C11	78	5%	13%
C12	87	6%	3%
C13	86	7%	-9%
C14	89	2%	-6%
C15	79	-1%	-15%
C16	79	-5%	-11%

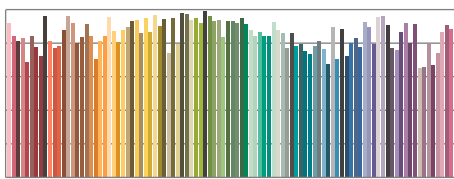

TM30-18  $R_f$ -values per reference colour

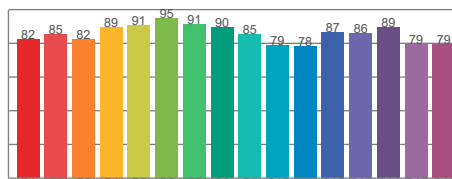


TM30-18  $R_f$ -values per hue bin

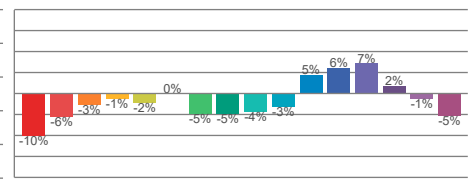


TM30 Chroma shift

## Colour Quality details

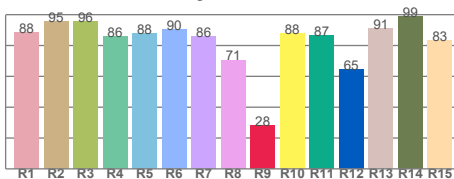

Colour Rendering Index

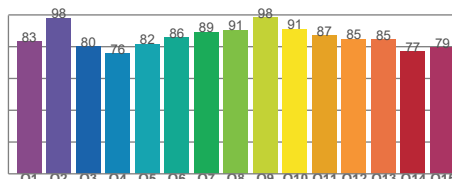

Colour Quality Scale

Document revision date: 1-7-2025 Measurement serial: VFR-250604-9363-SW



174-275 LED panel | butterfly | 60\*60 | 3-CCT | UGR19 | dim.

Flicker / temporal light artefacts details

**Measurement conditions**

Flicker meter type	Viso Systems LabFlicker
Flicker/TLA sample rate	20000 samples/s
Measurement time	5x 180 seconds (15 minutes) for PstLM. 1.2 sec for all other indices

**Flicker indices according to Illuminating Engineering Society (IES)**


Flicker frequency	100.5 Hz
Percent flicker	0.74 %
Flicker index	0

**TLA indices (according IEC TR 61547-1. EN 61000-3-3 and EN 61000-4-15)**

An LED luminaire is considered flicker-free if the SVM value is  $\leq 0.4$  and if the PstLM value is  $\leq 1.0$

PstLM value (F < 80 Hz)	0.16
SVM value (80 < F < 2000 Hz)	0.02


**Flicker frame (one flicker period in time domain)**

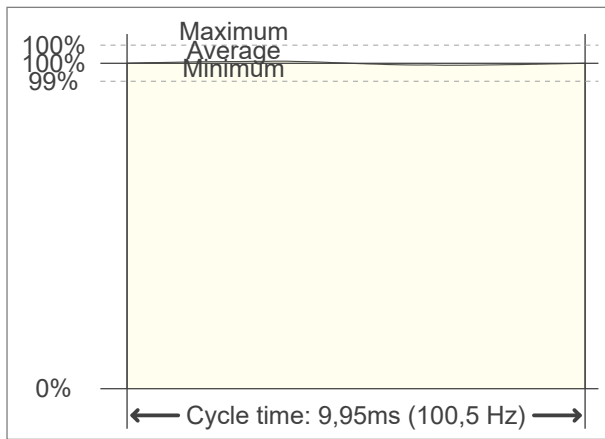

**Flicker FFT (flicker curve in frequency domain)**



**IEEE 1789-2015 Lighting Flicker Risk Zones**

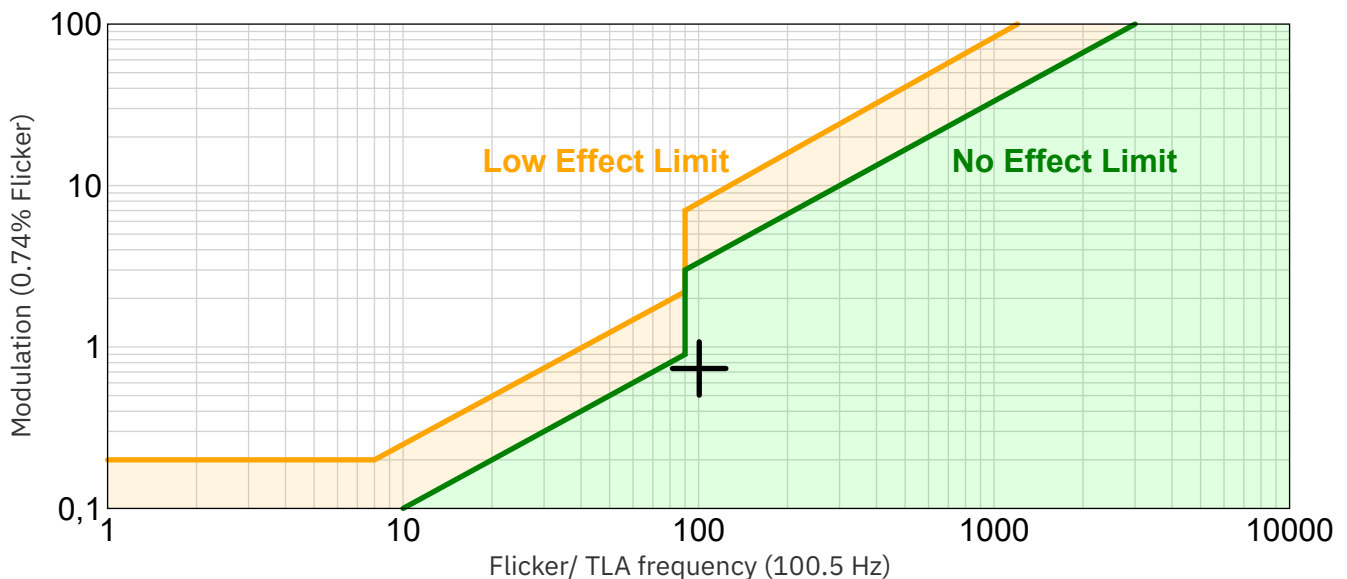

Document revision date: 1-7-2025 Measurement serial: VFR-250604-9363-SW




174-275 LED panel | butterfly | 60\*60 | 3-CCT | UGR19 | dim.

Beam angle

**Luminous Intensity diagram**

Unit: 0-100% of peak intensity

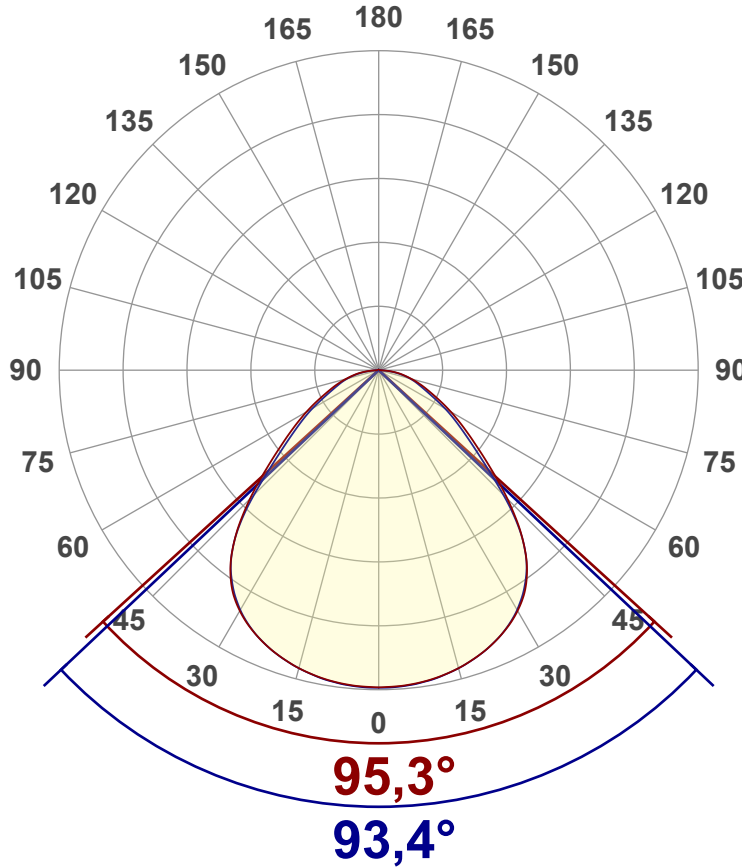

**Main Values**

Output (total Lumen)	3654 lm
Lumen Up/Down	0.02% / 99.98%
Peak Intensity	1550 cd
Beam Angle (50%)	94.3°
Beam Angle (90%)	93.4°
Beam Angle (10%)	95.3°

**Cut-off Angle**

Average 2.5%	171.3°
--------------	--------

**Field Angle**

Average 10%	151.3°
-------------	--------


**Intensity Ratio**

In 120° cone	85.8%
In 90° cone	64.9%

**C planes**

- C000-C180
- C090-C270

**Linear distribution diagram - Intensity (candela) vs  $\gamma$ -angle**

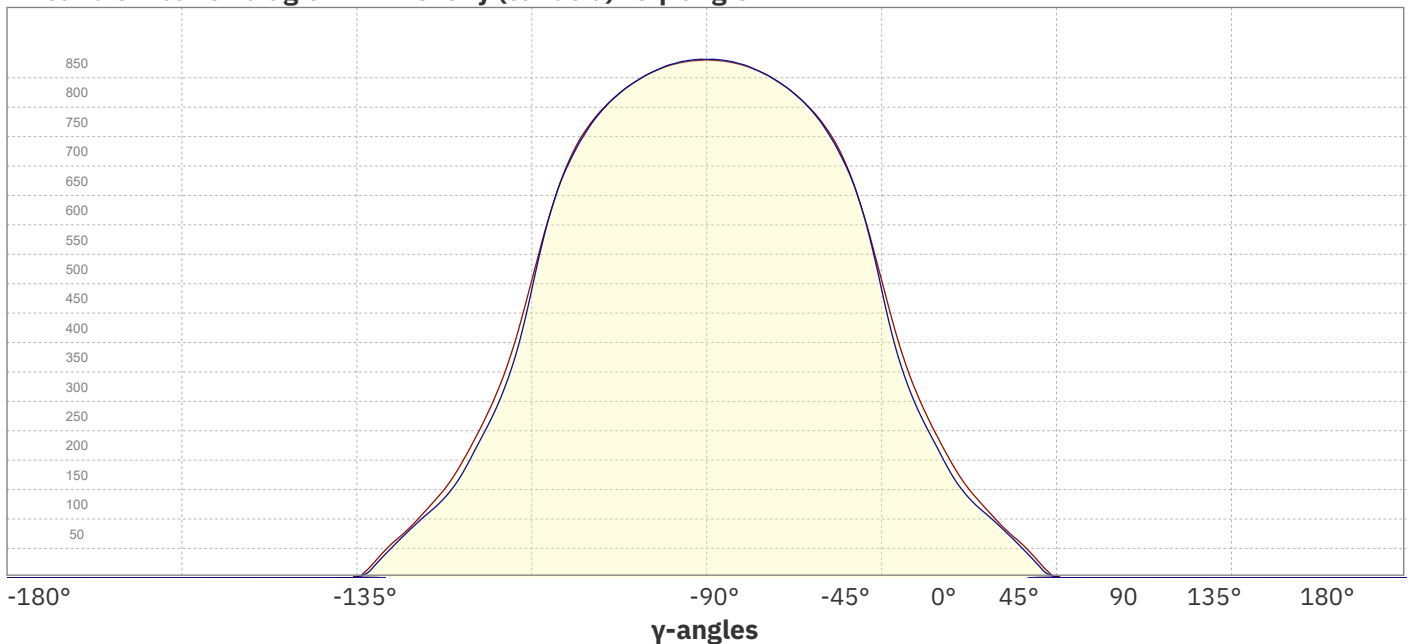


Document revision date: 1-7-2025 Measurement serial: VFR-250604-9363-SW



174-275 LED panel | butterfly | 60\*60 | 3-CCT | UGR19 | dim.

Beam Details

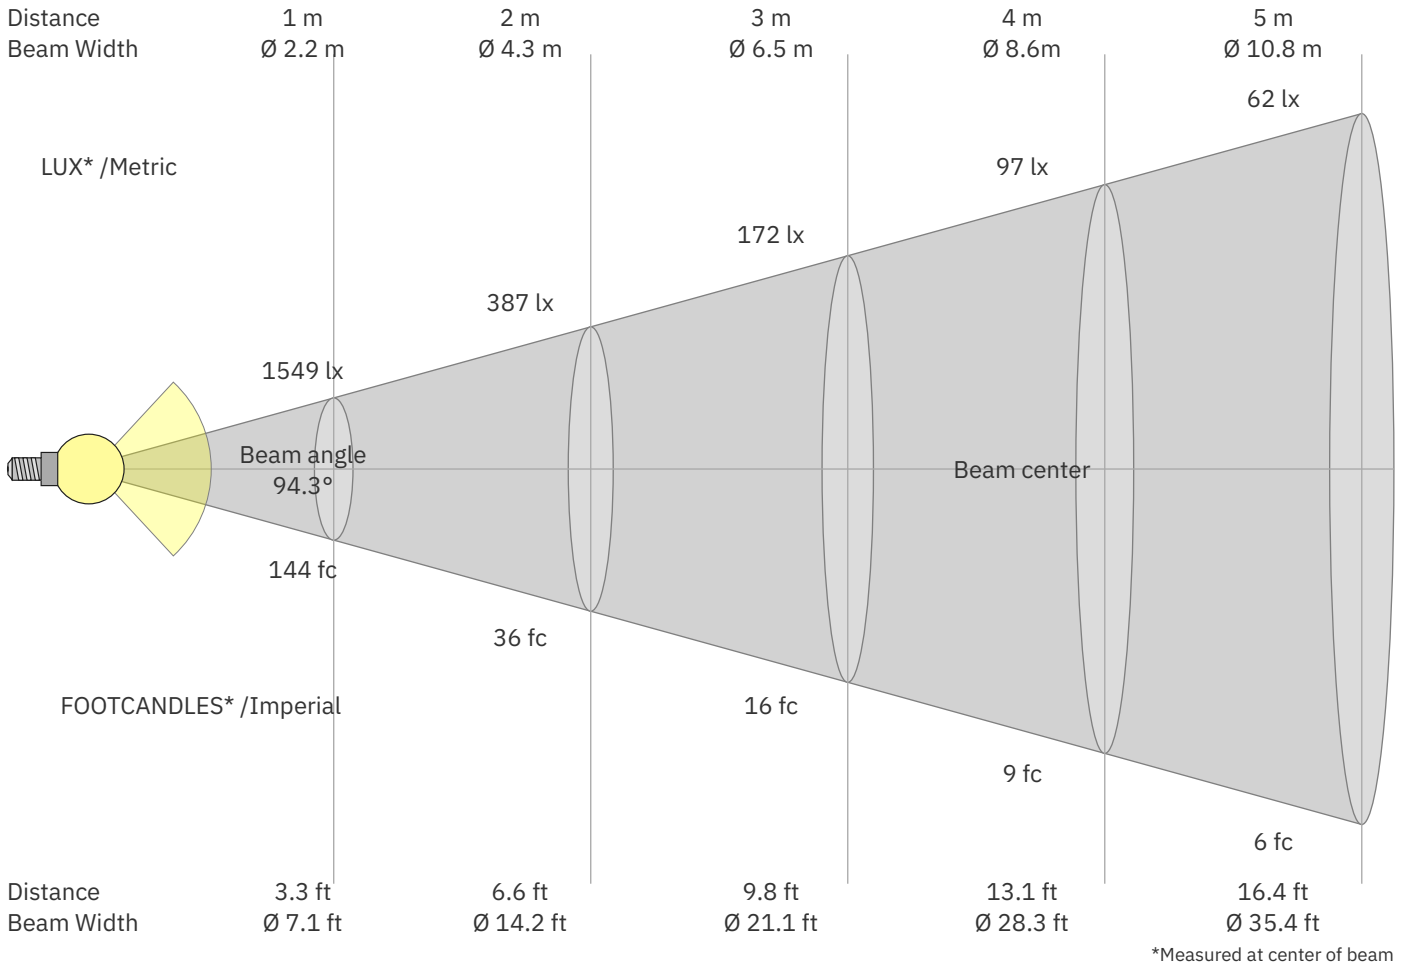

\*Measured at center of beam

Beam intensities from 1 – 20 m

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	m
3.3	6.6	9.8	13.1	16.4	19.7	23	26.2	29.5	32.8	36.1	39.4	42.7	45.9	49.2	52.5	55.8	59.1	62.3	65.6	ft
1549	387	172	97	62	43	32	24	19	15	13	11	9	8	7	6	5	5	4	4	lux
143.9	36	16	9	5.8	4	2.9	2.2	1.8	1.4	1.2	1	0.9	0.7	0.6	0.6	0.5	0.4	0.4	0.4	fc

Intensities in 0° c-plane

0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°	γ
1549	1543	1530	1506	1470	1422	1356	1257	1099	889	681	526	407	305	230	166	112	53	3	0	cd
100%	100%	99%	97%	95%	92%	88%	81%	71%	57%	44%	34%	26%	20%	15%	11%	7%	3%	0%	0%	of 0°val

Intensities in 90° c-plane

0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°	γ
1549	1546	1532	1506	1470	1421	1351	1250	1099	861	634	486	373	274	209	158	102	42	2	0	cd
100%	100%	99%	97%	95%	92%	87%	81%	71%	56%	41%	31%	24%	18%	14%	10%	7%	3%	0%	0%	of 0°val

Intensities in 180° c-plane

0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°	γ
1549	1543	1530	1506	1470	1422	1356	1257	1099	889	681	526	407	305	230	166	112	53	3	0	cd
100%	100%	99%	97%	95%	92%	88%	81%	71%	57%	44%	34%	26%	20%	15%	11%	7%	3%	0%	0%	of 0°val

Intensities in 270° c-plane

0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°	γ
1549	1546	1532	1506	1470	1421	1351	1250	1099	861	634	486	373	274	209	158	102	42	2	0	cd
100%	100%	99%	97%	95%	92%	87%	81%	71%	56%	41%	31%	24%	18%	14%	10%	7%	3%	0%	0%	of 0°val

Document revision date: 1-7-2025 Measurement serial: VFR-250604-9363-SW



174-275 LED panel | butterfly | 60\*60 | 3-CCT | UGR19 | dim.

Light Planning – UGR table

Uncorrected, comprehensive UGR table according to CIE 117-1995

Reflectances		70	70	50	50	30	70	70	50	50	30
ρ Ceiling		70	70	50	50	30	70	70	50	50	30
ρ Walls		50	30	50	30	30	50	30	50	30	30
ρ Floor		20	20	20	20	20	20	20	20	20	20
Room size		Viewed Crosswise					Viewed Endwise				
H = mounting height above eye level		(Viewing direction orthogonal to lamp length axis)					(Viewing direction parallel to lamp length axis)				
X	Y										
2H	2H	15.9	17.0	16.1	17.3	17.5	15.7	16.8	15.9	17.0	17.3
	3H	16.8	18.0	17.2	18.2	18.4	16.5	17.6	16.9	17.9	18.1
	4H	17.3	18.4	17.7	18.7	18.9	17.0	18.1	17.4	18.3	18.6
	6H	17.8	18.8	18.1	19.0	19.4	17.5	18.4	17.8	18.7	19.1
	8H	18.0	18.9	18.3	19.2	19.6	17.6	18.5	17.9	18.8	19.2
	12H	18.1	19.0	18.4	19.3	19.8	17.7	18.6	18.0	18.9	19.4
4H	2H	16.2	17.3	16.6	17.6	17.8	16.0	17.1	16.4	17.4	17.6
	3H	17.5	18.4	17.9	18.7	19.2	17.2	18.1	17.6	18.5	18.9
	4H	18.0	18.9	18.5	19.3	19.8	17.8	18.6	18.2	19.0	19.5
	6H	18.6	19.4	19.1	19.8	20.1	18.3	19.1	18.8	19.5	19.8
	8H	18.9	19.6	19.4	20.0	20.3	18.5	19.3	19.0	19.6	20.0
	12H	19.0	19.6	19.5	20.1	20.5	18.7	19.3	19.2	19.7	20.2
8H	4H	18.3	19.0	18.8	19.4	19.8	18.0	18.8	18.5	19.1	19.5
	6H	19.0	19.6	19.5	20.0	20.6	18.8	19.3	19.3	19.8	20.3
	8H	19.4	19.9	19.9	20.4	21.0	19.1	19.6	19.6	20.1	20.7
	12H	19.7	20.1	20.2	20.6	21.2	19.3	19.7	19.9	20.2	20.8
12H	4H	18.3	18.9	18.8	19.3	19.8	18.0	18.7	18.5	19.1	19.5
	6H	19.1	19.6	19.6	20.1	20.8	18.9	19.3	19.4	19.9	20.5
	8H	19.5	19.9	20.1	20.4	21.0	19.2	19.6	19.8	20.1	20.7

Variations with the observer position for the luminaire spacings. S:

S = 1.0H	0.2 / -0.2	0.2 / -0.3
S = 1.5H	0.4 / -0.5	0.5 / -0.5
S = 2.0H	0.9 / -0.8	1.0 / -0.9

Coefficients of Utilization

Ceiling reflectance	80	70	50	30	10	0												
Wall reflectance	70 50 30	10 70 50	30 10 50	30 10 50	30 10 50	30 10 0												
Floor reflectance	20 20 20	20 20 20	20 20 20	20 20 20	20 20 20	20 20 0												
RCR	(RCR: Room Cavity Ratio)																	
Room Values are expressed as percentage of Lumen delivered to the task surface																		
0	119	119	119	119	116	116	116	116	111	111	106	106	106	102	102	102	100	
1	110	106	102	98	107	103	100	97	99	96	94	95	93	91	92	90	88	86
2	101	94	87	82	98	92	86	81	88	83	79	85	81	78	82	79	76	74
3	93	83	76	70	91	82	75	69	79	73	68	76	71	67	74	69	66	64
4	86	75	67	60	84	73	66	60	71	64	59	69	63	58	67	62	58	56
5	79	67	59	53	77	66	58	53	64	57	52	62	56	51	60	55	51	49
6	74	61	53	47	72	60	52	47	58	51	46	57	51	46	55	50	45	43
7	68	56	47	42	67	55	47	42	53	46	41	52	46	41	51	45	41	39
8	64	51	43	37	62	50	43	37	49	42	37	48	42	37	47	41	37	35
9	60	47	39	34	58	46	39	34	45	38	34	44	38	34	43	38	33	32
10	56	44	36	31	55	43	36	31	42	35	31	41	35	31	40	35	30	29