



### Features

- GU10 Housing with REFLED ES50 36° lamp included, Ideal for indoor application, Loop in - loop out box included

### Product Overview


Product name	INSET TREND KIT SW IP44 REFLED ES50 36° WH NW DIM
Technology	LED
Cap/Base	GU10
Housing	Aluminium
Mount	Ceiling recessed mounting
Light source included	0029128
Environment	Indoor
E-number FI	4270039
E-number SE	7468152
Fixture luminous flux (lm)	345
Luminaire efficacy (lm/W)	76
LOR (%)	100
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Total power consumption (W)	4.5
Control gear type	Electronic ballast
Housing colour	White
IP rating	IP44/20
IK rating	IK02
Product EAN number	8711971017653

## INSET TREND KIT SW IP44 REFLED ES50 36° WH NW DIM 3001765

Warranty

3 years

### Technical drawings

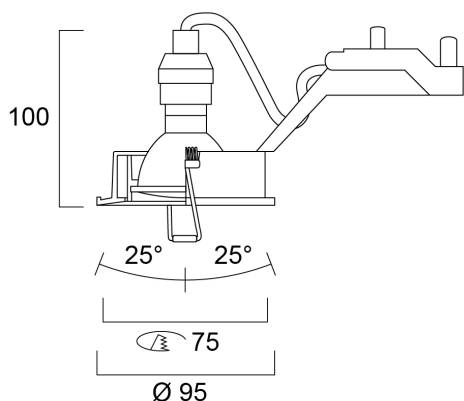

### Data table

#### GENERAL DATA

Product name	INSET TREND KIT SW IP44 REFLED ES50 36° WH NW DIM
Technology	LED
Cap/Base	GU10
Housing	Aluminium
Mount	Ceiling recessed mounting
Environment	Indoor
E-number FI	4270039
E-number SE	7468152
Warranty	3 years

#### OPTICAL DATA

Fixture luminous flux (lm)	345
Luminaire efficacy (lm/W)	76
LOR (%)	100

## INSET TREND KIT SW IP44 REFLED ES50 36° WH NW DIM 3001765

Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Adjustable chromaticity	N

### ELECTRICAL DATA

Light source included	0029128
Total power consumption (W)	4.5
Control gear required	No
Control gear type	Electronic ballast
Energy Efficiency Class (A->G) of contained light source	F

### PHYSICAL DATA

Housing colour	White
IP rating	IP44/20
IK rating	IK02
Diffuser finish	Transparent
Diffuser material	Other
Nominal Product Diameter (mm)	95
Weight (kg)	0.224
Recessed Depth (mm)	140

### PACKAGING

Single packaging type	Carton
Product EAN number	8711971017653
Packaging single width (cm)	10.03
Packaging single depth (cm)	8.53
DUN14 (outer)	18711971017650
Packaging outer length / height (cm)	29.0

### SAFETY DATA

Special purpose lamp	No
----------------------	----

# Lumiance

INSET TREND KIT SW IP44 REFLED ES50 36° WH NW DIM  
**3001765**

Dry applications use only

No

Suitable for household illumination

No