
2-conductor ground terminal block; 16 mm²; lateral marker slots; for DIN-rail 35 x 15 and 35 x 7.5; CAGE CLAMP®; 16,00 mm²; green-yellow



https://www.wago.com/283-607



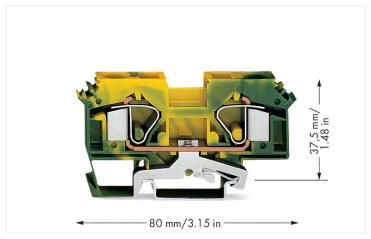

Color: green-yellow

_	ecti	2100	1 11 1	<b>1</b> + 1
		16.0	ıuc	าเล

Ratings per	IEC/EN 60947-7-2		
Overvoltage category	III	III	II
Pollution degree	3	2	2
Nominal voltage	-	-	-
Rated surge voltage	-	-	-
Rated current	-	-	-

Connection data		
Connection points	2	
Total number of potentials	1	
Number of levels	1	

Connection 1	
Connection technology	CAGE CLAMP®
Actuation type	Operating tool
Connectable conductor materials	Copper
Solid conductor	0.2 16 mm² / 24 6 AWG
Fine-stranded conductor	0.2 16 mm² / 24 6 AWG
Strip length	16 17 mm / 0.63 0.67 inches
Wiring direction	Front-entry wiring

Physical data	
Width	12 mm / 0.472 inches
Height	80 mm / 3.15 inches
Depth from upper-edge of DIN-rail	37.5 mm / 1.476 inches

# Data Sheet | Item Number: 283-607 https://www.wago.com/283-607



Mechanical data		
Design	horizontal type	
Mounting type	DIN-35 rail	
Marking level	Side marking	

Material data	
Note (material data)	<a href="https://www.wago.com/us/material-specifications">Information on material specifications can be found here</a>
Color	green-yellow
Material group	I
Insulation material	Polyamide (PA66)
Flammability class per UL94	V0
Fire load	0.449 MJ
Weight	42 g

Environmental requirements	
Processing temperature	-35 +85 °C
Continuous operating temperature	-60 +105 °C

Commercial data	
Product Group	1 (Rail Mounted Terminal Blocks)
eCl@ss 10.0	27-14-11-41
eCl@ss 9.0	27-14-11-41
ETIM 8.0	EC000901
ETIM 7.0	EC000901
PU (SPU)	25 pcs
Packaging type	Box
Country of origin	DE
GTIN	4045454084547
Customs tariff number	85369010000

Environmental Product Compliance	
CAS-No.	7439-92-1
REACH Candidate List Substance	Lead
RoHS Compliance Status	Compliant,With Exemption
RoHS Exemption	7(a) 7(c)-l 7(c)-ll
SCIP notification number (Austria)	41f4a7ee-6c29-41e2-be2f-99e19e0aeca9
SCIP notification number (Belgium)	364078f0-6f5e-427e-a0f6-78fd1b8dbf09
SCIP notification number (Bulgaria)	b4fd2833-b42f-4c22-a64e-5f8df4654b6c
SCIP notification number (Czech Republic)	07dace2c-202c-4c8e-b7bc-535338e4745e
SCIP notification number (Denmark)	c8cad518-67a1-46d6-891c-31e6113a1cdc
SCIP notification number (Finland)	d0eb975a-fd50-4788-abb3-cb59f6017b55
SCIP notification number (France)	d5bafed5-15d3-4313-8254-e362e1f44d13
SCIP notification number (Germany)	bfb0846a-4f21-4ec6-b323-40d32863335f
SCIP notification number (Hungary)	9e246cb3-59a2-4e94-ba25-e36ab0c0e390
SCIP notification number (Italy)	ef62378c-d62d-4cb8-b9ce-256a109ce518
SCIP notification number (Netherlands)	7a6cf20b-26c0-4621-839a-0e0b2a654cc8
SCIP notification number (Poland)	42c90627-91db-4108-9ac4-a73487210436
SCIP notification number (Romania)	c6b3d24c-a522-42e4-9c6b-3f7dc1bd9541
SCIP notification number (Sweden)	11ea5a99-03f0-4a2d-90d6-2e8b212ee4ea

https://www.wago.com/283-607



# Approvals / Certificates

# General approvals







Approval	Standard	Certificate Name
CCA DEKRA Certification B.V.	EN 60947	NTR NL 7895
CSA DEKRA Certification B.V.	C22.2 No. 158	1536072
KEMA/KEUR DEKRA Certification B.V.	EN 60947	71-120777
UL UL International Germany GmbH	UL 1059	E45172

### Declarations of conformity and manufacturer's declarations

Approval	Standard	Certificate Name
EU-Declaration of Confor- mity WAGO GmbH & Co. KG	-	-

## Approvals for marine applications







Approval	Standard	Certificate Name
ABS American Bureau of Ship- ping	-	20-HG1941090-PDA
BV Bureau Veritas S.A.	EN 60947	07436/F0 BV
DNV GL Det Norske Veritas, Ger- manischer Lloyd	-	TAE00001V2

# Downloads

#### **Environmental Product Compliance**

#### Compliance Search

**Environmental Product** Compliance 283-607



#### Documentation

Additional Information


**Technical Section** 


pdf 2240.62 KB



https://www.wago.com/283-607



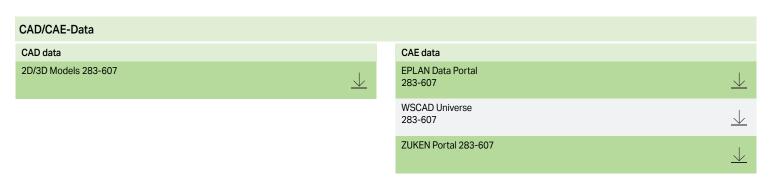

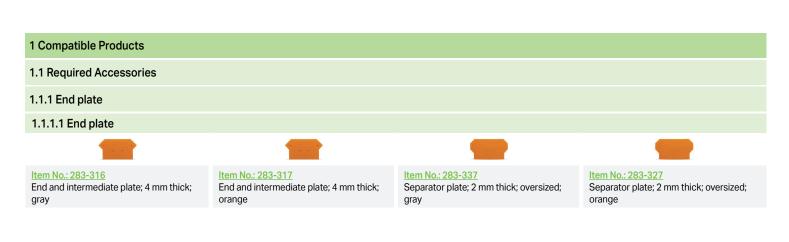

#### 1.2 Optional Accessories

#### 1.2.1 Cover

#### 1.2.1.1 Cover



# Item No.: 283-400

Finger guard; touchproof cover protects unused conductor entries; yellow

#### 1.2.2 DIN-rail

#### 1.2.2.1 Mounting accessories



#### Item No.: 210-196

Aluminum carrier rail; 35 x 8.2 mm; 1.6 mm thick; 2 m long; unslotted; similar to EN 60715; silver-colored

#### Item No.: 210-198

Copper carrier rail; 35 x 15 mm; 2.3 mm thick; 2 m long; unslotted; according to EN 60715; copper-colored

#### Item No.: 210-508

Steel carrier rail; 35 x 15 mm; 1.5 mm thick; 2 m long; slotted; galvanized; similar to EN 60715; silver-colored

# Item No.: 210-197

Steel carrier rail; 35 x 15 mm; 1.5 mm thick; 2 m long; slotted; similar to EN 60715; silver-colored



#### Item No.: 210-506

Steel carrier rail; 35 x 15 mm; 1.5 mm thick; 2 m long; unslotted; galvanized; similar to EN 60715; silver-colored

#### Item No.: 210-114

Steel carrier rail; 35 x 15 mm; 1.5 mm thick; 2 m long; unslotted; similar to EN 60715; silver-colored

#### Item No.: 210-118

Steel carrier rail; 35 x 15 mm; 2.3 mm thick; 2 m long; unslotted; according to EN 60715; silver-colored

# Item No.: 210-115

Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; slotted; according to EN 60715; "Hole width 18 mm; silver-colored



#### Item No.: 210-112

Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; slotted; according to EN 60715; "Hole width 25 mm; silver-colored

# Item No.: 210-504

Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; slotted; galvanized; according to EN 60715; silver-colored

# Item No.: 210-113

Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; unslotted; according to EN 60715; silver-colored

#### Item No.: 210-505

Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; unslotted; galvanized; according to EN 60715; silver-colored

https://www.wago.com/283-607



#### 1.2.3 Ferrule

#### 1.2.3.1 Ferrule

Item No.: 216-284





Ferrule; Sleeve for 1.5 mm<sup>2</sup> / AWG 16; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; black



Item No.: 216-289

Ferrule; Sleeve for 10 mm<sup>2</sup> / AWG 8; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; red



Item No.: 216-109

Ferrule; Sleeve for 10 mm<sup>2</sup> / AWG 8; uninsulated; electro-tin plated



Item No.: 216-286

Ferrule; Sleeve for 2.5 mm<sup>2</sup> / AWG 14; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; blue



Item No.: 216-287

Ferrule; Sleeve for 4 mm² / AWG 12; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; gray



Ferrule; Sleeve for 6 mm² / AWG 10; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; yellow

#### Item No.: 216-108

Ferrule; Sleeve for 6 mm<sup>2</sup> / AWG 10; uninsulated; electro-tin plated; silver-colored

#### 1.2.4 Installation

#### 1.2.4.1 Cover



#### Item No.: 709-154

Cover; Type 2; suitable for cover carrier, type 2; 1 m long; transparent

#### 1.2.4.2 Cover carrier



#### Item No.: 709-168

Cover carrier; Type 2; incl. fixing/retaining screws and knurled nut; suitable for 283 to 285 Series rail-mounted terminal blocks; suitable for 279 to 281 Series double- and triple-deck terminal blocks; suitable for 780 to 785, 775, 776 and 777 Series TOPJOB® rail-mounted terminal blocks; suitable for 280 Series sensor and actuator terminal blocks; suitable for 282 Series disconnect/test terminal blocks for transformer circuits; gray

#### 1.2.4.3 Mounting accessories





Item No.: 209-106

Mounting carrier; for isolated mounting on DIN 35 rails; gray

Item No.: 249-116

Screwless end stop; 6 mm wide; for DIN-rail 35 x 15 and 35 x 7.5; gray

https://www.wago.com/283-607



#### 1.2.5 Jumper

#### 1.2.5.1 Jumper

Item No.: 283-402

Jumper; insulated; gray

Item No.: 283-409

Jumper; insulated; gray

Item No.: 285-435 Jumper; insulated; gray Item No.: 283-422

Jumper; insulated; yellow-green

#### 1.2.6 Marking

#### 1.2.6.1 Group marker carrier



Item No.: 249-105

Group marker carrier; gray

#### 1.2.6.2 Marker



#### Item No.: 793-5501/000-006

WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 -5.2 mm; plain; snap-on type; blue



Item No.: 793-5501/000-012 WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 -5.2 mm; plain; snap-on type; orange



## Item No.: 793-5501/000-002

WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 -5.2 mm; plain; snap-on type; yellow



#### Item No.: 793-501/000-017

WMB marking card; as card; not stretchable; plain; snap-on type; light green



#### Item No.: 793-501

WMB marking card; as card; not stretchable; plain; snap-on type; white



# Item No.: 2009-115/000-023

WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; green



#### Item No.: 2009-115

WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; white



#### Item No.: 793-5501/000-007

WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 -5.2 mm; plain; snap-on type; gray



# Item No.: 793-5501/000-005

WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 -5.2 mm; plain; snap-on type; red



WMB marking card; as card; not stretchable; plain; snap-on type; blue



#### Item No.: 793-501/000-006



#### Item No.: 793-501/000-012

WMB marking card; as card; not stretchable; plain; snap-on type; orange



#### Item No.: 793-501/000-002

WMB marking card; as card; not stretchable; plain; snap-on type; yellow



#### Item No.: 2009-115/000-017

WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; light green



#### Item No.: 2009-115/000-002

WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; yellow



#### Item No.: 793-5501/000-023

WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 -5.2 mm; plain; snap-on type; green



# Item No.: 793-5501/000-024

WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 -5.2 mm; plain; snap-on type; violet



#### Item No.: 793-501/000-007

WMB marking card; as card; not stretchable; plain; snap-on type; gray



#### Item No.: 793-501/000-005

WMB marking card; as card; not stretchable; plain; snap-on type; red



Item No.: 2009-115/000-006

WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; blue



#### Item No.: 2009-115/000-012

WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; orange



#### Item No.: 793-5501/000-017

WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 -5.2 mm; plain; snap-on type; light green



#### Item No.: 793-5501

WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 -5.2 mm; plain; snap-on type; white



#### Item No.: 793-501/000-023

WMB marking card; as card; not stretchable; plain; snap-on type; green



#### Item No.: 793-501/000-024

WMB marking card; as card; not stretchable; plain; snap-on type; violet



#### Item No.: 2009-115/000-007 WMB-Inline; for Smart Printer; 1500 pie-

ces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; gray



#### Item No.: 2009-115/000-024

WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; violet

https://www.wago.com/283-607



#### 1.2.7 Power tap

#### 1.2.7.1 Power tap



Item No.: 283-407

Power tap; with 500 mm cable; for 16 mm² (283/783 Series) and 35 mm²; gray

#### 1.2.8 Protective warning marker

#### 1.2.8.1 Cover



### Item No.: 283-415

Protective warning marker; for 5 terminal blocks; with high-voltage symbol, black; yellow

#### 1.2.9 Test and measurement

#### 1.2.9.1 Testing accessories



Item No.: 283-404

Test plug adapter; 11.6 mm wide; for 4 mm Ø test plugs; gray

#### 1.2.10 Tool

#### 1.2.10.1 Operating tool



Item No.: 210-721

Operating tool; Blade: 5.5 x 0.8 mm; with a partially insulated shaft; multicoloured

#### Installation Notes

#### Installation



Snapping a ground conductor block onto the DIN-rail automatically makes a direct electrical connection to the rail.



Quick assembly keys prevent reverse mounting.



Removing a terminal block from the assembly.

https://www.wago.com/283-607

# W/AGO

#### Conductor termination



**CAGE CLAMP® connection** Inserting a conductor.



CAGE CLAMP® connection Inserting a conductor. With ferruled conductors, it is necessary to use a terminal block one size larger than the conductor's nominal cross-section.



**CAGE CLAMP® connection** Removing a solid conductor.

# Commoning



Commoning ground conductor terminal blocks with through terminal blocks is possible in one direction only (via rear side of terminal block) using adjacent jumpers. WAGO recommends using yellow–green adjacent jumpers in addition to the required marking of these blocks.

#### Marking



Labeling via WMB Multi Marking System.

Subject to changes. Please also observe the further product documentation!