


Walraven starQuick® Push Plug

(C0575)

for use with Walraven starQuick®

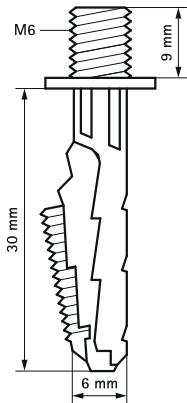

Features & benefits

- for fixing of a Walraven starQuick® clamp or other clamp with thread connection M6
- pre-drill hole Ø 6 mm and insert plug
- material: modified PA6 (polyamide), grey (according to RAL 7035)
- resistant to UV, ageing, oil and petrol
- no corrosion, recyclable, halogen free
- temperature resistance from approx. -40 °C to approx. +90 °C (constant); short to approx. +130 °C

Product Number	Plug Length	Drill Hole Diameter Plugs	Min. Drill Hole Depth	Thread Size	Length Metrical Thread	Standard Embedment Depth	Total Width x Total Height x Total Length
Reference letter	LP	d0	h0 min	TS	Lm	hnom	W x H x L
Unit description	mm	mm	mm		mm	mm	mm x mm x mm
6101063	30	6	30	M6	9	30	13 x 8 x 42