





| | |
|---|----------------------------------|
| Description | RESIDUAL CURRENT CIRCUIT BREAKER |
| Code | SD |
| No. of poles | 4P |
| No. modules | 3 |
| Rated current | 25 A |
| Rated residual operating current | 300 mA |
| Type | A |
| Rated voltage (EN/IEC 61008-1, 61008-2-1) | 400/415 V |

| | | | |
|---------------------------|-----------------------------------|--|----------------------------------|
| Standard | IEC/EN 61008-1, IEC/EN 61008-2-1 | Rated frequency (Hz) | 50 Hz |
| Insulation voltage (Ui) | 500 V | Rated impulse withstand voltage (Uimp) | 4 kV |
| Overvoltage category | III | Level of immunity (8/20 μs) | 250 A |
| Section rigid cable | <=1x35 - <=2x16 - <=1x16+2x10 mm² | Section flexible cable | <=1x25 - <=1x16+1x10 - <=3x6 mm² |
| Rated tightening torque | 2 Nm | Double connection | YES (up stream and down stram) |
| Operating temperature | -25 +40 °C | Stocking temperature | -40°C + +70°C |
| Electrical endurance | ≥ 5000 | Mechanical endurance | ≥ 10.000 |
| Auxiliaries compatibility | Yes | ReStart compatibility | No |
| Assembly position | Any | | |

DIMENSIONAL

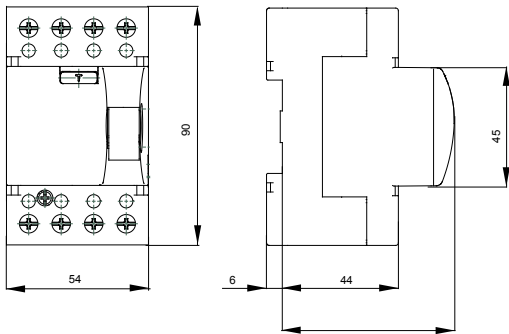

WIRING DIAGRAM

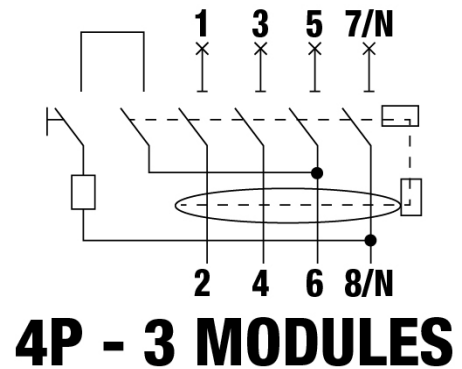

STANDARDS/APPROVALS

