

Features

- Insaver Slim is a ceiling recessed LED downlight (IP44 from the front), Die-cast aluminium body, loop in loop out connector for quick installation, Non dimmable LED driver, 4000K; UGR <19 with shallow product depth 60mm. The range features a multipower functionality where the luminous flux of the luminaire can be tailored to local needs by only setting a quick selector switch on the driver. 8 steps available with adjustable lumen output of 650 – 2050lm at 4000K. Meets TP(a) requirements.


Product Overview

| | |
|---------------------------------|---|
| Product name | Insaver Slim IP44 205 Multi650-2050 840 |
| Technology | LED |
| Cap/Base | N/A |
| Housing | Aluminium |
| Mount | Ceiling recessed mounting |
| E-number FI | 4278528 |
| Fixture luminous flux (lm) | 2050 |
| Luminaire efficacy (lm/W) | 128 |
| Colour temperature (K) | 4000 |
| Light colour | Neutral White |
| CRI (Ra) | 80 |
| Colour Variation Initial (SDCM) | 3 |
| Glare control | < 19 |
| Photobiological Risk Group | RG1 |
| Total power consumption (W) | 16 |
| Electrical protection | Class II |
| Control gear type | LED driver constant current |
| LED Flickering Rate | Ultra low (5% or less) |
| Housing colour | RAL 9010 - Pure white |

Insaver Slim IP44 205 Multi650-2050 840 0030551

| | |
|--------------------|---------------|
| IP rating | IP44/20 |
| IK rating | IK07 |
| Product EAN number | 5410288305516 |
| Warranty | 5 years |

Photometry

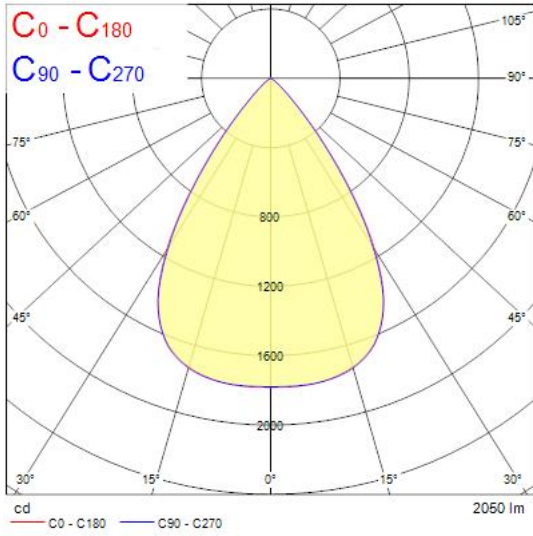

Technical drawings

