

RANA LED R 625 HO 4K LOUV+PRI DALI W GEN2  
0052463



Features

• Ceiling Recessed LED Linear luminaire (lay-in), with Louvre + Prismatic Optic, Direct Light Distribution, Luminaire Dimensions: 620x620x60mm, Sylvania White body colour, IP20, IK07, Light Engine Dimensions: 570x285mm, DALI Dimmable (Switch-DIM/Push-DIM enabled), Low LED flicker (+/-5%), Neutral White (4000K) LED Colour Temperature, 4500lm, 40W, 113lm/W efficacy, CRI>80, 3 SDCM (3-step MacAdam ellipse) LED Colour Consistency, UGR<19, Luminance at 65° < 3000 cd/m2, Lumen Maintenance: L90B10 at 50,000 hours, Glow Wire Test 850°C, Quick and easy electrical connection with direct access to push-connectors on top, 2 x metallic safety cables (1.5m) included, the luminaire can be covered with building insulation of Glass Wool type.


Product Overview

|                                 |                                           |
|---------------------------------|-------------------------------------------|
| Product name                    | RANA LED R 625 HO 4K LOUV+PRI DALI W GEN2 |
| Technology                      | LED                                       |
| Cap/Base                        | N/A                                       |
| Housing                         | Steel                                     |
| Mount                           | Ceiling recessed mounting                 |
| Fixture luminous flux (lm)      | 4500                                      |
| Luminaire efficacy (lm/W)       | 113                                       |
| Colour temperature (K)          | 4000                                      |
| Light colour                    | Neutral White                             |
| CRI (Ra)                        | 80                                        |
| Colour Variation Initial (SDCM) | 3                                         |
| Glare control                   | < 19                                      |
| Photobiological Risk Group      | RG0                                       |
| Total power consumption (W)     | 40                                        |
| Electrical protection           | Class I                                   |
| Control gear type               | Electronic ballast                        |

RANA LED R 625 HO 4K LOUV+PRI DALI W GEN2  
0052463

|                    |               |
|--------------------|---------------|
| Housing colour     | White         |
| IP rating          | IP20          |
| IK rating          | IK07          |
| Product EAN number | 5410288524634 |
| Warranty           | 5 years       |

Photometry

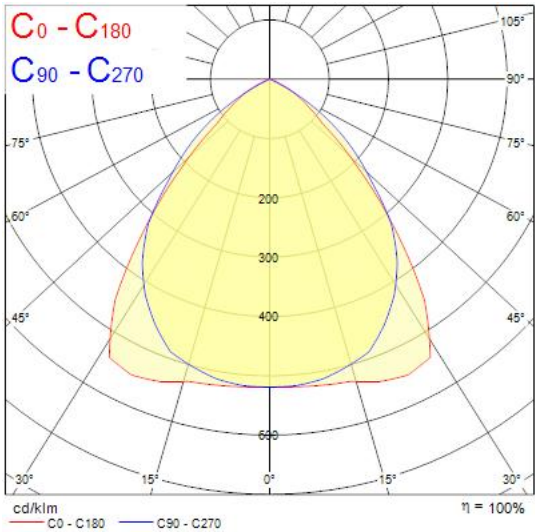

Technical drawings

