


RANA LED Recessed 1250
RANA LED R 1250 LO 4K LOUV+PRI W GEN2
0052471

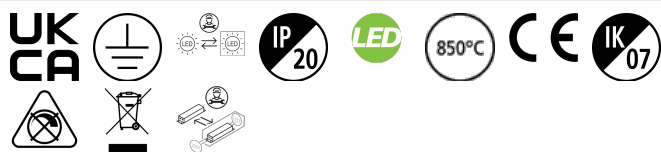

PRODUCT OVERVIEW

Product name	RANA LED R 1250 LO 4K LOUV+PRI W GEN2
Technology	LED
Cap/Base	N/A
Housing	Steel
Mount	Ceiling recessed mounting
Warranty	5 years
Fixture luminous flux (lm)	3100
Luminaire efficacy (lm/W)	111
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Glare control	< 19
Photobiological Risk Group	RG0
Total power consumption (W)	28
Electrical protection	Class I
Control gear type	LED driver constant current
LED Flickering Rate	Ultra low (5% or less)
Housing colour	White
IP rating	IP20
IK rating	IK07
Product EAN number	5410288524719

DATA TABLE

General data	
Product name	RANA LED R 1250 LO 4K LOUV+PRI W GEN2
Technology	LED
Cap/Base	N/A
Housing	Steel
Mount	Ceiling recessed mounting
Operating temperature range (°C)	5°C...+25°C

RANA LED Recessed 1250

RANA LED R 1250 LO 4K LOUV+PRI W GEN2
0052471

Performance ambient temperature Tq (°C)	25
Warranty	5 years

Optical data

Fixture luminous flux (lm)	3100
Luminaire efficacy (lm/W)	111
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Glare control	< 19
Photobiological Risk Group	RG0

Electrical data

Total power consumption (W)	28
Primary Supply/Product voltage - min (V)	220
Lamp power factor	0.95
Electrical protection	Class I
Control gear type	LED driver constant current
Drive current (mA)	275
Inrush Current (A)	22
Inrush Duration (µs)	250
Glow Wire Test (°C)	850
Energy Efficiency Class (A->G) of contained light source	C
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Ultra low (5% or less)
Max. products per 10A C Breaker	28
Max. products per 20A B Breaker	34
Connectable conductor cross section - Min (mm²)	2.5
Connectable conductor cross section - Max (mm²)	2.5

Lifetime data

Lifespan L70 B50	50000
Lifespan L70 B10	50000
Lifespan L80 B50	50000
Lifespan L80 B10	50000
Lifespan L90 B50	50000
Lifespan L90 B10	50000

Physical data

Housing colour	White
IP rating	IP20
IK rating	IK07
Diffuser finish	Prismatic
Diffuser material	PC Polycarbonate
Nominal Product Length (mm)	1246

RANA LED Recessed 1250
RANA LED R 1250 LO 4K LOUV+PRI W GEN2
0052471

Nominal Product Width (mm)	306
Weight (kg)	5.6
Recessed Depth (mm)	120


Packaging

Single packaging type	Carton
Product EAN number	5410288524719
Packaging single width (cm)	36.0
Packaging single depth (cm)	9.0
DUN14 (outer)	05410288524719
Packaging outer length / height (cm)	137.0

Safety data

Optimal operating condition (°C)	5-25
----------------------------------	------

PHOTOMETRY

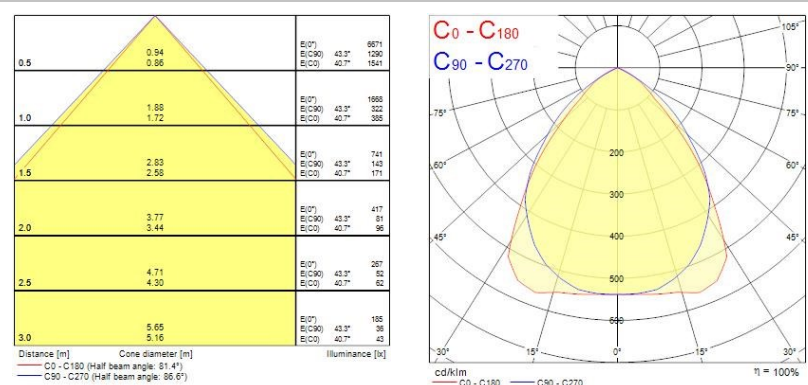

TECHNICAL DRAWINGS

