



Features

• OPTIX LINEAR RECESSED 1200 TW ALU SSC EM is a high efficacy low glare linear luminaire for office and education applications. Suitable for continuous light line installations with accessories separately available. Ceiling recessed 1146x95x90 mm. Aluminised plastic extra low glare optics in a single line configuration. White RAL9016 fixture body. 3hr maintained emergency version. SylSmart Standalone colour control and dimming. Tunable white colour 3000-6000K, CRI>80, chromaticity tolerance of 3-step MacAdam ellipse. Luminous flux 2200lm. Power consumption 25W. Luminaire efficacy 88lm/W. Lifespan: 48,500 hours L90B10. UGR<19, Luminance at 65°<200 Cd/m2, IK07, IP20. Ultra Low Flicker: <5% Photobiological safety risk group 1. Electrical protection Class I. Glow wire test 850°C. Suitable for use with Linect quick connection sytems.


Product Overview

Product name	OPTIX LINEAR RECESSED 1200 TW ALU SSC EM
Technology	LED (3 SDCM)
Cap/Base	N/A
Housing	Steel
Mount	Ceiling recessed mounting
Fixture rating	Enclosed
General application	Education, Office
ETIM Class	EC002892
Fixture luminous flux (lm)	2200
Luminaire efficacy (lm/W)	88
Light colour	Tuneable White
CRI (Ra)	80
Colour Variation Initial (SDCM)	3


OPTIX LINEAR RECESSED 1200 TW ALU SSC EM 2023796

Glare control	< 16
Photobiological Risk Group	RG1
Luminous flux (emergency) (lm)	80
Total power consumption (W)	25
Electrical protection	Class I
Control gear type	LED driver constant current
Dimmable	Yes
LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL9016
IP rating	IP20
IK rating	IK07
Product EAN number	5025768237968
Warranty	5 years
Dimming method	SylSmart SSC


Photometry

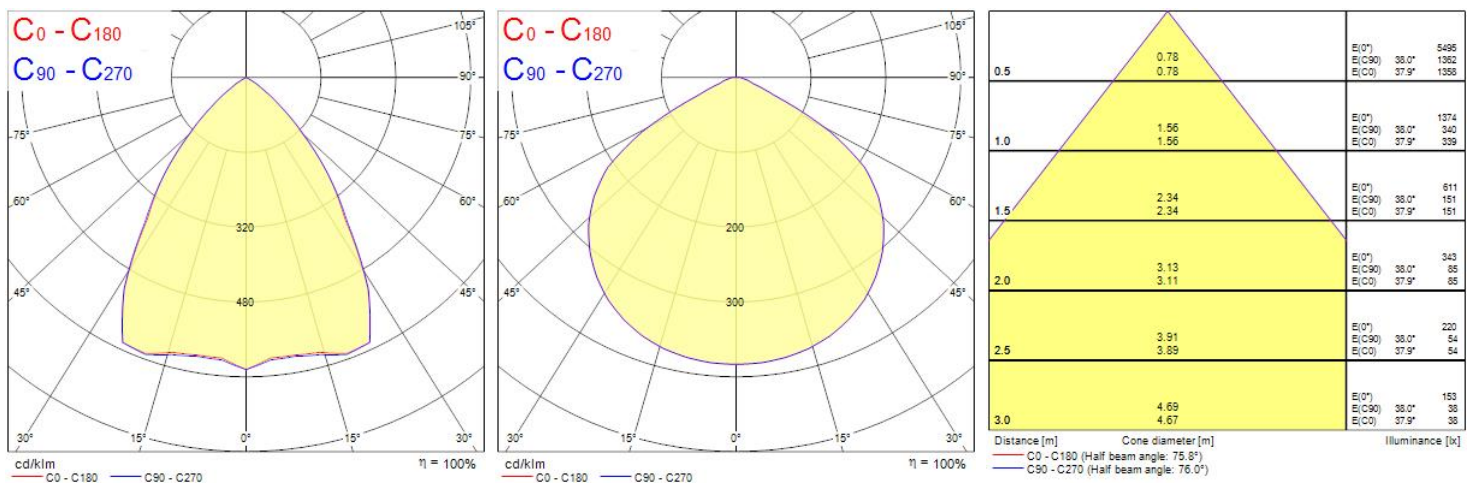

OPTIX LINEAR RECESSED 1200 TW ALU SSC EM
2023796

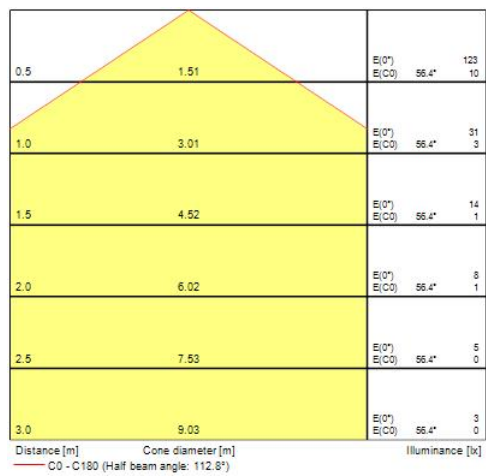

Technical drawings

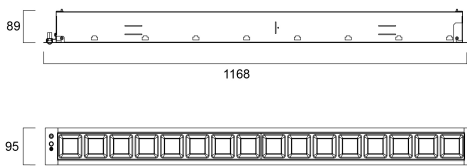

Data table

GENERAL DATA

Product name	OPTIX LINEAR RECESSED 1200 TW ALU SSC EM
Technology	LED (3 SDCM)
Cap/Base	N/A
Housing	Steel
Mount	Ceiling recessed mounting
Fixture rating	Enclosed
General application	Education, Office
Operating temperature range (°C)	10°C...+25°C

OPTIX LINEAR RECESSED 1200 TW ALU SSC EM 2023796

Performance ambient temperature Tq (°C)	25
---	----

ETIM Class	EC002892
------------	----------

Warranty	5 years
----------	---------

OPTICAL DATA

Fixture luminous flux (lm)	2200
----------------------------	------

Luminaire efficacy (lm/W)	88
---------------------------	----

Light colour	Tuneable White
--------------	----------------

CRI (Ra)	80
----------	----

Colour Variation Initial (SDCM)	3
---------------------------------	---

Glare control	< 16
---------------	------

Photobiological Risk Group	RG1
----------------------------	-----

Luminous flux (emergency) (lm)	80
--------------------------------	----

Emergency duration (h)	3
------------------------	---

ELECTRICAL DATA

Total power consumption (W)	25
-----------------------------	----

Primary Supply/Product voltage - min (V)	220
--	-----

Primary Supply/Product voltage - max (V)	240
--	-----

Lamp power factor	0.97
-------------------	------

THD (at 230 V, 50 Hz, full load, at 100% dimming level) ≤ xx.x %	10
--	----

Electrical protection	Class I
-----------------------	---------

Control gear required	No
-----------------------	----

Control gear type	LED driver constant current
-------------------	-----------------------------

Dimmable	Yes
----------	-----

Dimming method	SylSmart SSC
----------------	--------------

Drive current (mA)	400
--------------------	-----

Inrush Current (A)	29
--------------------	----

Inrush Duration (µs)	180
----------------------	-----

Energy Efficiency Class (A->G) of contained light source	D
--	---

Nominal Frequency (Hz)	50/60Hz
------------------------	---------

OPTIX LINEAR RECESSED 1200 TW ALU SSC EM 2023796

LED Flickering Rate	Ultra low (5% or less)
Max. products per 10A C Breaker	21
Max. products per 13A C Breaker	28
Max. products per 16A C Breaker	36
Max. products per 20A C Breaker	45
Max. products per 10A B Breaker	13
Max. products per 13A B Breaker	17
Max. products per 16A B Breaker	22
Max. products per 20A B Breaker	27
Connectable conductor cross section - Min (mm ²)	2.5
Connectable conductor cross section - Max (mm ²)	2.5

LIFETIME DATA

Lifespan L70 B50	120000
Lifespan L80 B20	107500
Lifespan L90 B10	48500

PHYSICAL DATA

Housing colour	RAL9016
IP rating	IP20
IK rating	IK07
Diffuser finish	Matt/satinized
Diffuser material	PC Polycarbonate
Nominal Product Length (mm)	1169
Nominal Product Width (mm)	95
Nominal Product Height (mm)	90
Weight (kg)	3.15

PACKAGING

Product EAN number	5025768237968
Packaging single length / height (cm)	119.0
Packaging single width (cm)	10.0

OPTIX LINEAR RECESSED 1200 TW ALU SSC EM 2023796

Packaging single depth (cm)	11.0
DUN14 (inner)	05025768237968
Units per outer package	1
Packaging outer length / height (cm)	119.0
Packaging outer width (cm)	10.0
Packaging outer depth (cm)	11.0

SAFETY DATA

Glow Wire Test (°C)	850
Optimal operating condition (°C)	10-25
Special purpose lamp	No
Dry applications use only	No
Suitable for household illumination	No