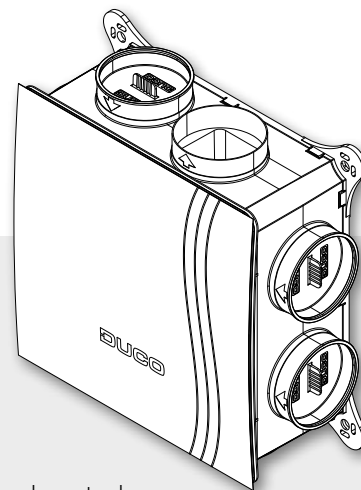


TECHNICAL DATA SHEET

DucoBox Silent Connect 400

The DucoBox Silent Connect is a compact, durable and extremely energy-efficient central extract unit, developed for use within DUCO's demand-controlled ventilation systems and extracts the moist and/or polluted air when necessary and in the right quantity.

The DucoBox Silent Connect uses just one circuit board for both the calibration and control electronics. Simple design and an efficient DC motor ensure long service life.

Physical characteristics

Item number	0000-4250 (plug type F)
Optional accessories	0000-4182 (Silent Plus Kit)
Extraction capacity at 150 Pa	400 m ³ /h
Width x Height x Depth (mm)	480 x 480 x 194
Weight	4,3 kg
Colours	Green with white lid
Communication	Duco RF Duco Wired Switch sensor (voltage-free input) Box sensor CO ₂ Box sensor Humidity Expandable with Duco Connectivity Board (0000-4810)
Power cable length	1,5 m (about 1 m outside the DucoBox)

Electrical characteristics

Unom	230 VAC – 50 Hz	Inom	0.65 A
Pmax	85 W	Cos	0,55
IP class	IP42		

